

DEMOLITION/REMOVAL KEYNOTES:

- 1

REMOVE CONCRETE SIDEWALK AND OTHER CONCRETE SLABS/PADS WHERE SHOWN OR WHERE IN CONFLICT WITH NEW WORK. REMOVE TO THE NEAREST CONSTRUCTION/CONTRACTION JOINT OR SAW-CUT TO PRODUCE NEAT/CLEAN JOINT. WHERE SIDEWALK TO BE REMOVED ABUTS EXISTING SIDEWALK OR CONCRETE/ASPHALT PARKING, ENTRY PLAZA, ETC. THAT IS TO REMAIN, SAW-CUT ALONG EXISTING JOINTS TO ENSURE A UNIFORM BREAK POINT AND FACILITATE REMOVAL.
- 2

REMOVE CONCRETE DRIVEWAY APRON WHERE SHOWN OR WHERE IN CONFLICT WITH NEW WORK. REMOVE TO THE NEAREST CONSTRUCTION/CONTRACTION JOINT OR SAW-CUT TO PRODUCE NEAT/CLEAN JOINT. WHERE DRIVEWAY APRON TO BE REMOVED ABUTS EXISTING SIDEWALK OR CONCRETE/ASPHALT PARKING, ENTRY PLAZA, ETC. THAT IS TO REMAIN, SAW-CUT ALONG EXISTING JOINTS TO ENSURE A UNIFORM BREAK POINT AND FACILITATE REMOVAL.
- 3

REMOVE CONCRETE CURB/CURB & GUTTER WHERE SHOWN OR WHERE IN CONFLICT WITH NEW WORK. REMOVE TO THE NEAREST CONSTRUCTION/CONTRACTION JOINT OR SAW-CUT TO PRODUCE NEAT/CLEAN JOINT. WHERE CONCRETE CURB/CURB & GUTTER TO BE REMOVED ABUTS SIDEWALK OR CONCRETE/ASPHALT PAVEMENT THAT IS TO REMAIN, SAW-CUT AND REMOVE AN ADDITIONAL 1-FOOT OF PAVEMENT TO FACILITATE REMOVAL AND ENSURE A UNIFORM EDGE FOR RE-PAVING. REFER TO TYPICAL SECTIONS FOR ADDITIONAL INFORMATION. NOTE: IN MANY AREAS OF THE PROJECT THE GUTTER IS "OVER PAVED" WITH ASPHALT.
- 4

REMOVE ASPHALT PAVEMENT (SURFACE AND BINDER COURSE, AND AGGREGATE BASE) AND ADJOINING CURB/CURB AND GUTTER WITHIN LIMITS OF DEMOLITION, WHERE SHOWN, OR WHERE REQUIRED FOR CONSTRUCTION OF NEW WORK. WHERE NEW CONCRETE CURB/CURB & GUTTER IS TO BE INSTALLED, SAW-CUT AND REMOVE AN ADDITIONAL 1-FOOT OF PAVEMENT TO FACILITATE PLACEMENT OF NEW CURB/CURB & GUTTER TO ENSURE A UNIFORM EDGE FOR RE-PAVING. REFER TO TYPICAL SECTIONS FOR ADDITIONAL INFORMATION.
- 5

REMOVE TREES, TREE GRATES, SHRUBS, AND OTHER LANDSCAPE FEATURES WITHIN DEFINED PROJECT WORK LIMITS OR WHERE IN CONFLICT WITH NEW WORK. TREES INDICATED TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
- 6

SAW-CUT AND REMOVE ASPHALT FOR INSTALLATION OF NEW STORM DRAINAGE, WATER AND SANITARY SEWER SYSTEM. REFER TO SHEETS C4.1 THRU C4.3 FOR ADDITIONAL INFORMATION.
- 7

EXISTING UTILITY FEATURES (WATER METER, MANHOLE, FIRE HYDRANT, ETC.) WITHIN LIMITS OF DEMOLITION AND REMOVAL SHALL BE SUPPORTED AND PROTECTED FROM DAMAGE DURING DEMOLITION AND REMOVAL OF ADJOINING SURFACES. REFER TO GENERAL NOTES (DEMOLITION AND REMOVAL) AND SHEETS C4.1 THROUGH C4.3 FOR ADDITIONAL INFORMATION AND REQUIREMENTS FOR ADJUSTMENTS AND/OR RELOCATIONS.
- 8

MILL AND OVERLAY EXISTING PAVEMENT TO EXTENT INDICATED. REFER TO NOTES AND SEQUENCE OF WORK ON SUBSEQUENT SHEETS.

REFER TO SHEETS C4.1 THRU C4.3 FOR WATER, SANITARY SEWER LINES, WATER METERS, CLEANOUTS AND OTHER SYSTEM COMPONENTS TO BE ABANDONED OR REMOVED.

REFER TO SHEET C2.2 FOR "SEQUENCE OF WORK" AND SHEET C2.1 FOR "EROSION AND SEDIMENT CONTROL NOTES".

EROSION & SEDIMENT CONTROL SYMBOLS LEGEND:

NOTE: REFER TO SHEET C2.4 FOR DETAILS/SECTIONS AND ADDITIONAL REQUIREMENTS.

IP

TEMPORARY INLET PROTECTION (STD. 3.07)

TO

TOPSOILING (STD. 3.30)

PS

PERMANENT SEEDING MIXTURE (STD. 3.32)

RWD

TEMPORARY RIGHT-OF-WAY DIVERSION (STD. 3.11)

TS

TEMPORARY SEEDING (STD. 3.31)

LIMITS OF LAND DISTURBANCE

DEMOLITION LEGEND:

REMOVE ASPHALT PAVEMENT

4

6

REMOVE CONC. SIDEWALK, CONC. ENTRANCES AND CONC. CURB

1

2



3

PAVEMENT MILLING AND OVERLAY

8

W-W REMOVE UTILITIES **7**
(SEE SHEETS C4.1 THRU C4.3)
----- LIMITS OF DEMOLITION AND REMOVAL / LAND DISTURBANCE

SB-8 SOIL BORING LOCATION

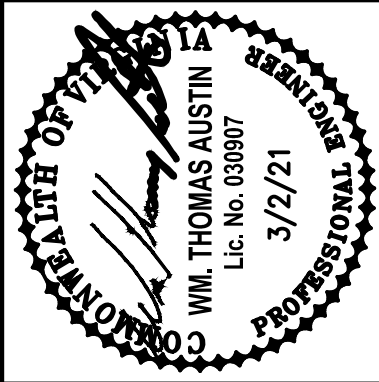

Date	
Revisions	

Issue Date:	MARCH 2, 2021
Drawn By:	NTW
Designed By:	Rulk
Checked By:	TWA
Date:	3/2/21

Matern & Craig
ENGINEERS/SURVEYORS

701 FIRST STREET, S.W.
ROANOKE, VIRGINIA 24016
(540) 345-9342
FAX (540) 345-7691

MELROSE AVE. STREETScape IMPROVEMENTS -
22ND TO 24TH ST.
DEMOLITION AND REMOVAL/EROSION
& SEDIMENT CONTROL PLAN-AREA 'C'
ROANOKE, VIRGINIA

Vertical Scale:	N/A
Horizontal Scale:	1"=20'
Commission Number:	4049
Sheet No.:	C2.3