

NOTE:



1. UNLESS OTHERWISE NOTED, 8-INCH MINIMUM SILT SOCKS MAY BE UTILIZED IN LIEU OF SILT FENCE FOR PERIMETER SEDIMENT CONTROL. FILTREXX SILT SOCKS ORIGINAL OR APPROVED EQUAL.

NOTE:

1. FOR INLETS WITHIN PAVED TRAVEL AREAS, UTILIZE BELOW-GRATE SEDIMENT CONTROL DEVICE SUITABLE FOR VEHICULAR TRAVEL AREAS. ACF ENVIRONMENTAL SILTSACK, DANDY PRODUCTS DANDY SACK OR APPROVED EQUAL.

NOTE:

1. WHERE SHOWN ON THE PLANS, SOIL STABILIZATION BLANKET/MATting SHALL BE INSTALLED FROM THE UPSTREAM CULVERT OUTLET TO THE DOWNSTREAM CULVERT INLET OR BEYOND THE DOWNSTREAM EDGE OF DISTURBANCE. MINIMUM OF 20-FOOT WIDE, CENTERED ALONG FLOW PATH.

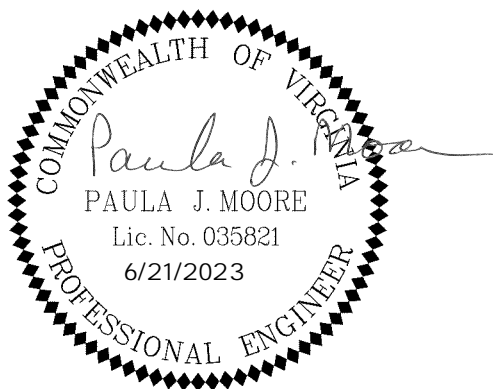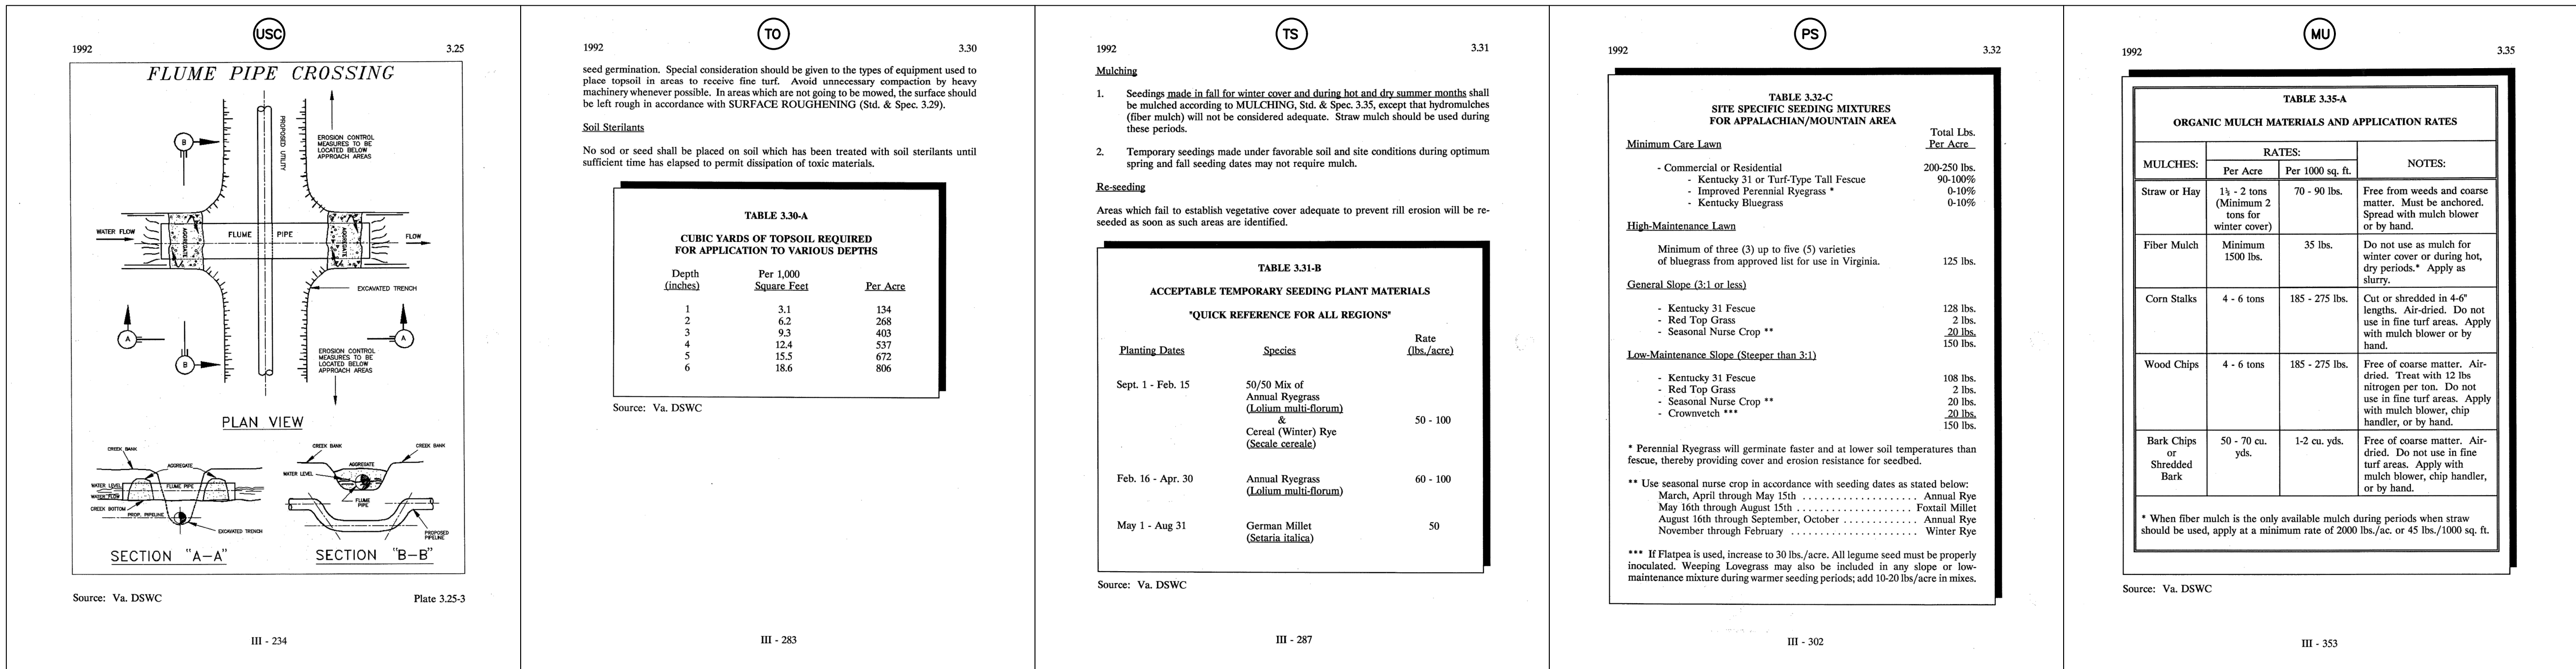

WESTERN VIRGINIA WATER AUTHORITY
601 South Jefferson Street, Suite 300
Roanoke, Virginia 24011

DES: BF
DRAWN: JES
CHECK: PJM
DATE: 6/20/23

SCALE: N/A
HORIZ: N/A
VERT: N/A

ANGEL LANE INTERCONNECTION

EROSION & SEDIMENT CONTROL DETAILS

DRAWING
C1.24

SHEET
24