


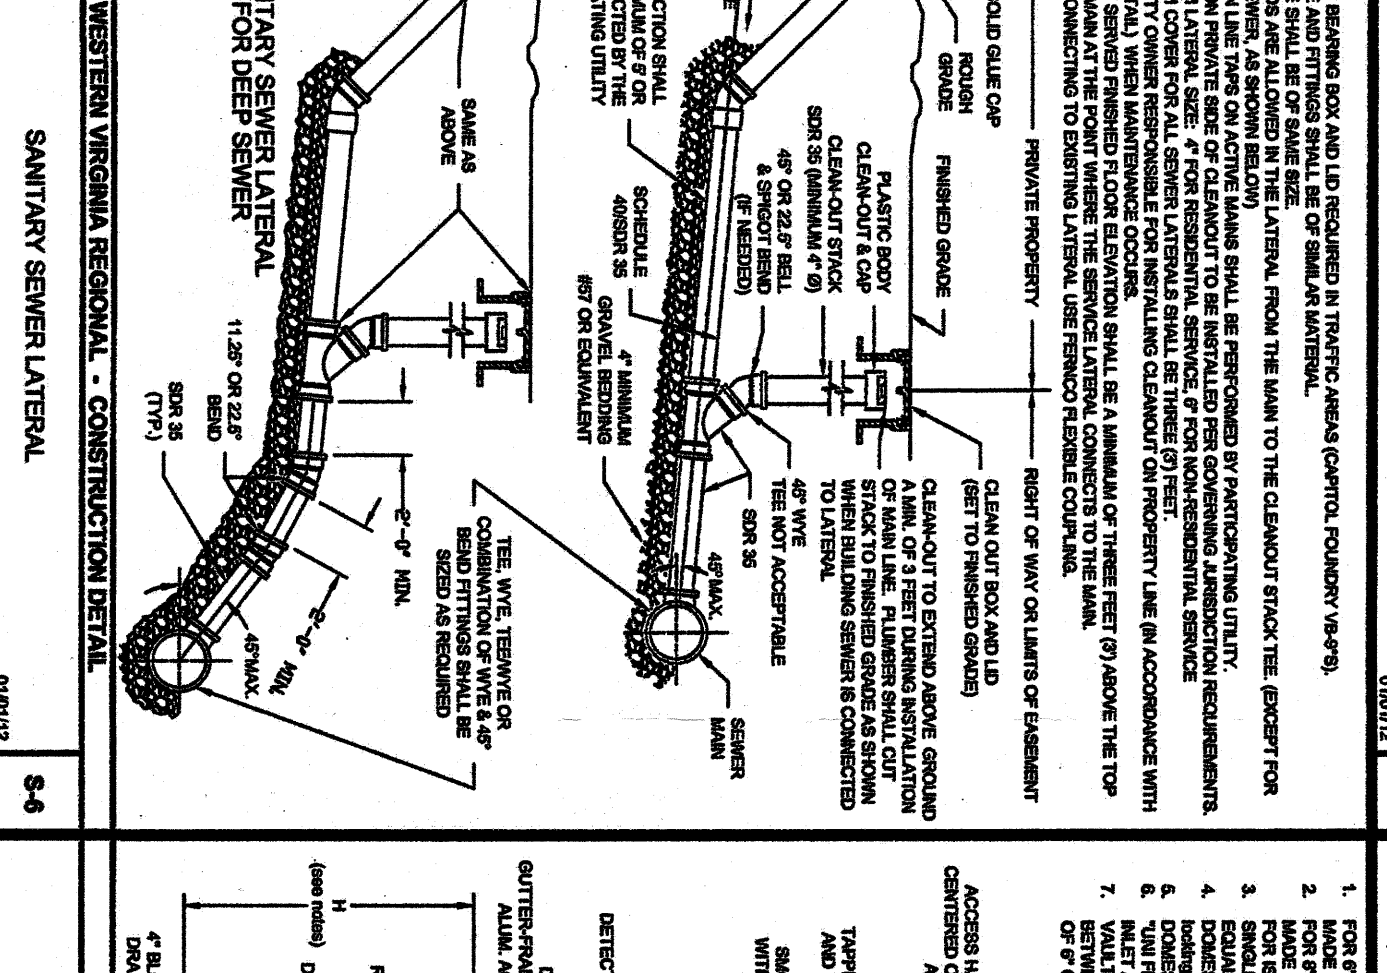
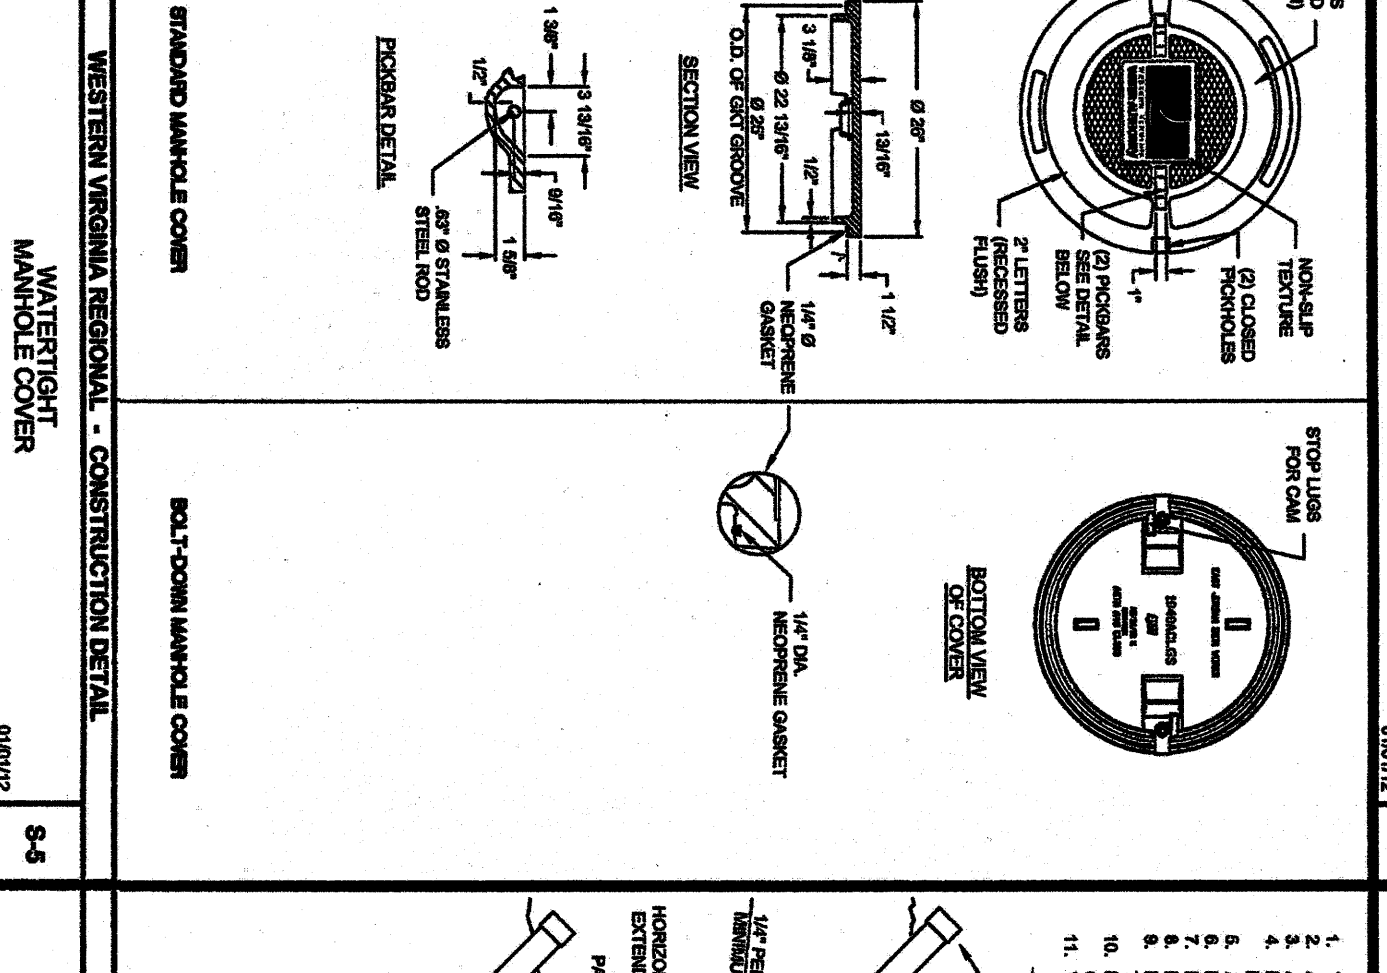
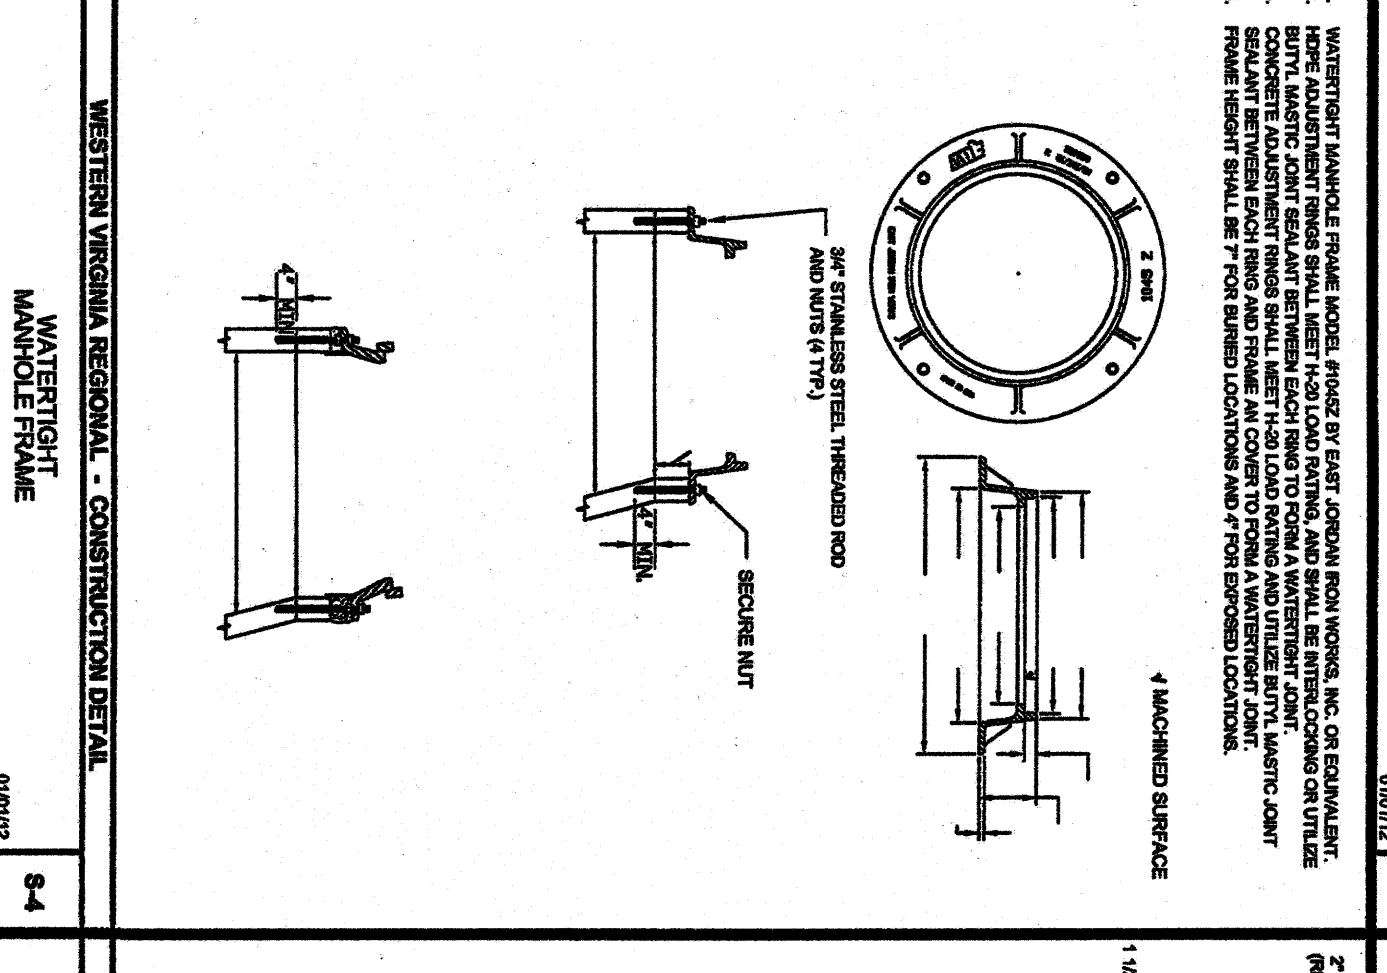


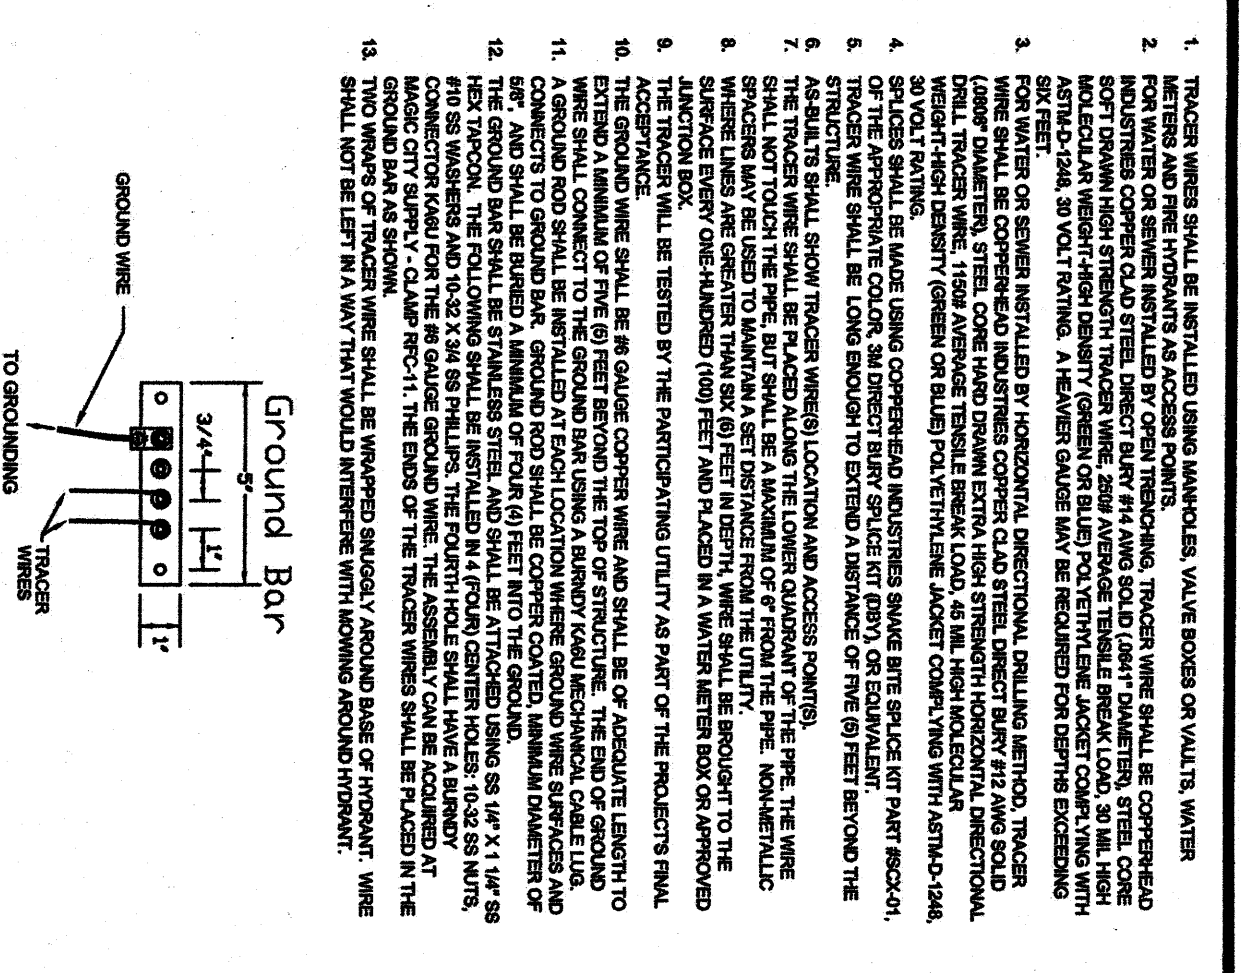

ANCHOR SPACING:
GRADES FROM 20% TO 35% --- 36 FEET ON CENTER
GRADES FROM 35% TO 50% --- 24 FEET ON CENTER
GRADES FROM 50% TO 60% --- 16 FEET ON CENTER

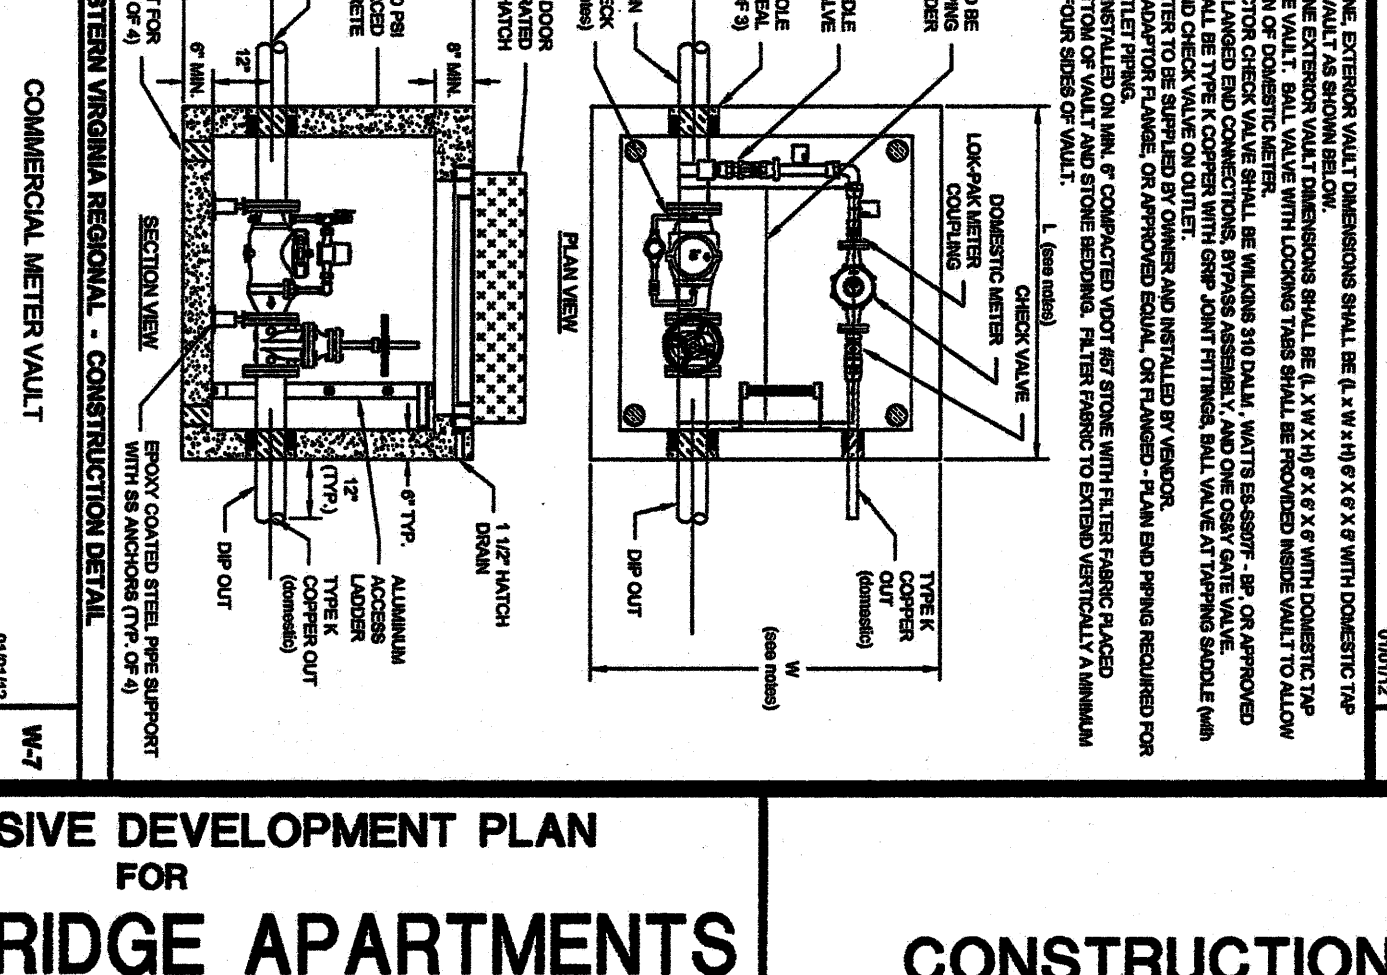

1. FILTER FABRIC TO BE INSTALLED BETWEEN BOTTOM OF PIPE AND STONE BEDDING. FABRIC TO EXTEND VERTICALLY A MINIMUM OF 6" FROM BOTTOM OF WALL (FULL CIRCUMFERENCE).

[illegible][illegible]

LA LUMSDEN ASSOCIATES, P.C.
ENGINEERS-SURVEYORS-PLANNERS
ROANOKE, VIRGINIA

4664 BRAMBLETON AVENUE
P.O. BOX 20669
ROANOKE, VIRGINIA 24018

PHONE: (540) 774-4411
FAX: (540) 772-9445
E-MAIL: MAIL@LUMSDENPC.COM