


SEE VDOT STANDARDS FOR VDOT STD. EC-3 TYPE A SPECIFICATIONS

DEYERLE DITCH
NO SCALE

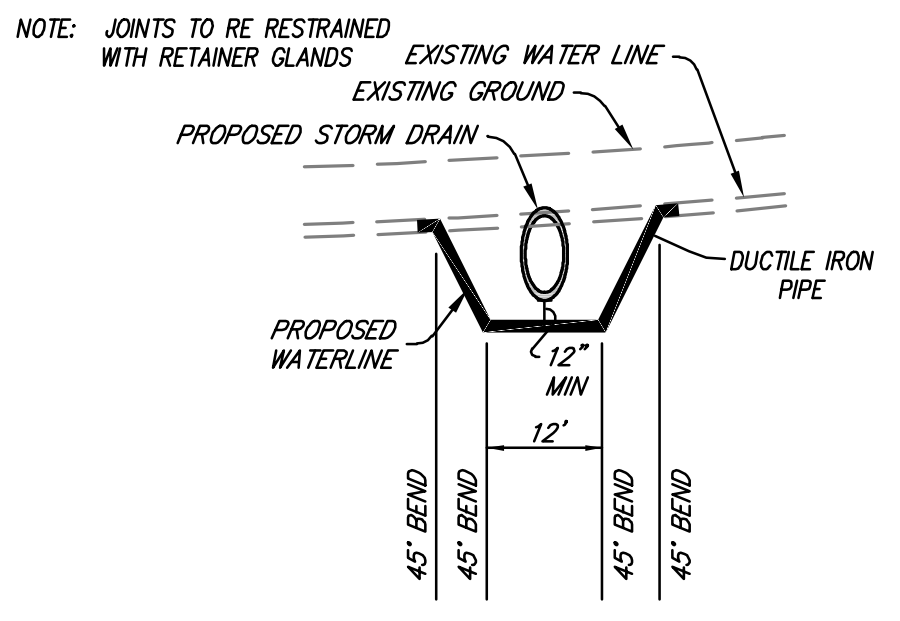

NOTE: WATERLINE RELOCATION SHALL PROVIDE A MINIMUM COVER OF 30 INCHES OVER THE WATERLINE. COORDINATE ALL WORK WITH THE WESTERN VIRGINIA WATER AUTHORITY.

WATER LINE RELOCATION DETAIL
NO SCALE

- NOTES:
- MILLING DEPTH SHALL BE A MINIMUM OF ONE AND ONE-HALF INCHES (1 1/2"). REPAVING SHALL EXACTLY MATCH MILLING DEPTH.
 - SEE SHEET 2 FOR LEGEND AND STORM DRAIN COORDINATES.
 - WORK IN THE RIGHT-OF-WAY IS TO BE PERFORMED PER THE CITY OF ROANOKE RIGHT-OF-WAY EXCAVATION AND RESTORATION STANDARDS.
 - ANY REQUIRED DRIVEWAY MODIFICATION SHALL BE PER DETAILS PROVIDED ON SHEET 2. EXISTING ASPHALT DRIVEWAYS AND GRAVEL DRIVEWAYS SHALL BE RECONSTRUCTED USING TYPE II PAVEMENT AND EXISTING CONCRETE DRIVEWAYS SHALL BE RECONSTRUCTED USING TYPE III PAVEMENT. DRIVEWAY REPLACEMENT WIDTH SHALL MATCH EXISTING DRIVEWAY WIDTH AND NOT BE INCREASED.
 - NO EXISTING UTILITY POLES ARE TO BE REMOVED OR DISTURBED DURING CONSTRUCTION. TEMPORARY BRACING OF UTILITY POLES MAY BE REQUIRED. EXCEPTION BEING APCO POLE #278-788 WHICH SHALL REQUIRE CONTRACTOR TO COORDINATE WITH AEP FOR EXISTING GUY WIRE REMOVAL OR RELOCATION FROM PROPOSED ROADWAY IMPROVEMENTS.
 - CONTRACTOR SHALL BE RESPONSIBLE FOR ALL SEWER AND WATER SERVICE LINE RELOCATIONS, SUBJECT TO WYMA INSPECTION.
 - ALL MAILBOXES AND ROADWAY SIGNS EFFECTED BY THESE PLANS SHALL BE REMOVED AND REPLACED ACCORDINGLY.
 - CONTRACTOR WILL BE RESPONSIBLE FOR MAINTAINING AT LEAST ONE (1) UNOBSTRUCTED LANE OF TRAFFIC AT ALL TIMES. TWO (2) LANES OF TRAFFIC SHALL BE RESTORED AT THE END OF EACH WORK DAY BY THE USE OF STEEL PLATES IN ACCORDANCE WITH THE VIRGINIA WORK AREA PROTECTION MANUAL. VDOT AND THE CITY OF ROANOKE MUST BE CONSULTED IF ANY PORTION OF CONSTRUCTION WILL NOT ALLOW FOR THE RESTORATION OF TWO (2) LANES OF TRAFFIC AT THE END OF EVERY WORK DAY.
 - ALL STORM DRAIN PIPE MATERIAL SHALL BE CLASS III RCP UNLESS OTHERWISE INDICATED.

Lumsden Associates, P.C.
ENGINEERS | SURVEYORS | PLANNERS

4664 BRAMBLETON AVENUE
P.O. BOX 20669
ROANOKE, VIRGINIA 24018

PHONE: (540) 774-4411
FAX: (540) 772-9445
WWW.LUMSDENPC.COM

FOR REVIEW ONLY

STORMWATER DRAINAGE IMPROVEMENTS
FOR
DEYERLE ROAD, S.W.
PREPARED FOR
THE CITY OF ROANOKE, VIRGINIA

NO.	DATE	REVISIONS	DESCRIPTION
1			
2			
3			
4			
5			

DATE: June 12, 2019

SCALE: 1" = 20'

COMMISSION NO: 19-007

SHEET 3 OF 9