

GENERAL NOTES

ALL CONSTRUCTION METHODS AND MATERIALS SHALL CONFORM TO THE CONSTRUCTION STANDARDS AND SPECIFICATIONS OF THE CITY OF ROANOKE. THE CONTRACTOR OR DEVELOPER IS REQUIRED TO NOTIFY THE CITY OF ROANOKE ENGINEERING DIVISION IN WRITING AT LEAST THREE (3) DAYS PRIOR TO ANY CONSTRUCTION, INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

- INSTALLATION OF APPROVED EROSION CONTROL DEVICES.
- CLEARING AND GRUBBING.
- SUBGRADE EXCAVATION.
- INSTALLING STORM SEWERS OR CULVERTS.
- INSTALLING CURB AND GUTTER FORMS.
- PLACING CURB AND GUTTER.
- PLACING OTHER CONCRETE.
- PLACING GRAVEL BASE.
- PLACING ANY ROADWAY SURFACE.
- INSTALLING WATER LINES.
- INSTALLING SANITARY SEWER LINES.

MEASURES TO CONTROL EROSION AND SILTATION MUST BE PROVIDED FOR PRIOR TO PLAN APPROVAL. PLAN APPROVAL IN NO WAY RELIEVES THE DEVELOPER OR CONTRACTOR OF THE RESPONSIBILITIES CONTAINED IN EROSION AND SILTATION CONTROL POLICIES.

FIELD CONSTRUCTION SHALL HONOR PROPOSED DRAINAGE DIVIDES AS SHOWN ON PLANS.

ALL UNSUITABLE MATERIAL SHALL BE REMOVED FROM THE CONSTRUCTION LIMITS OF THE ROADWAY BEFORE PLACING EMBANKMENT.

PAVEMENT SECTIONS ON APPROVED PLANS ARE BASED ON A MINIMUM CBR OF 10. CBR TESTS ARE TO BE ACQUIRED BY THE OWNER AND SUBMITTED TO THE CITY OF ROANOKE ENGINEERING DIVISION PRIOR TO PLACEMENT. CBR VALUES LESS THAN 10 WILL REQUIRE REVISED PAVEMENT SECTIONS.

CONTRACTOR SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AT THE JOB SITE.

ALL SPRINGS SHALL BE CAPPED AND PIPED TO THE NEAREST STORM SEWER OR NATURAL WATERCOURSE. THE PIPE SHALL BE MINIMUM OF 6" DIAMETER AND CONFORM TO VDOT STANDARD 58-1.

STANDARD STREET AND TRAFFIC CONTROL SIGNS SHALL BE ERECTED AT EACH INTERSECTION BY THE DEVELOPER PRIOR TO FINAL STREET ACCEPTANCE.

CONSTRUCTION DEBRIS SHALL BE CONTAINED IN ACCORDANCE WITH THE VIRGINIA LITTER CONTROL ACT. NO LESS THAN ONE LITTER RECEPTACLE SHALL BE PROVIDED ON-SITE.

THE CONTRACTOR SHALL PROVIDE ADEQUATE MEANS OF CLEANING MUD FROM TRUCKS AND/OR OTHER EQUIPMENT PRIOR TO ENTERING PUBLIC STREETS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO INSURE THAT THE STREETS ARE IN A CLEAN, MUD AND DUST FREE CONDITION AT ALL TIMES.

THE DEVELOPER AND/OR CONTRACTOR SHALL SUPPLY ALL UTILITY COMPANIES WITH COPIES OF APPROVED PLANS, ADVISING THEN THAT ALL GRADING AND INSTALLATION SHALL CONFORM TO APPROVED PLANS.

CONTRACTORS SHALL NOTIFY UTILITIES OF PROPOSED CONSTRUCTION AT LEAST TWO, BUT NOT MORE THAN TEN WORKING DAYS IN ADVANCE. AREA PUBLIC UTILITIES MAY BE NOTIFIED THROUGH MISS UTILITY AT (800) 552-7001.

100 YEAR FLOODWAY AND FLOOD PLAIN SHALL BE SHOWN WHERE APPLICABLE. ALL WORK SHALL BE SUBJECT TO INSPECTION BY CITY OF ROANOKE INSPECTORS.

GRADE STAKES SHALL BE SET FOR ALL CURB AND GUTTER, CULVERT, SANITARY SEWER, AND STORM SEWER.

LOCATION OF UNDERGROUND UTILITIES IS BASED ON FIELD SURVEYS, AS SHOWN BY AVAILABLE RECORDS, AND AS LOCATED BY THE UTILITY LOCATOR SERVICE.

THE SITE WORK AND LANDSCAPING CONTRACTOR(S) SHALL COMPLY WITH LOCAL CODES IN OBSERVING EROSION CONTROL MEASURES, BOTH ON AND OFF THE SITE. REFER TO THE VIRGINIA UNIFORM CODING SYSTEM CONTAINED IN THE VIRGINIA SOIL EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION, FOR DETAILS AND SPECIFICATIONS OF EROSION CONTROL ITEMS SHOWN ON THESE PLANS.

ALL STORM DRAIN CONSTRUCTION SHALL BE IN CONFORMANCE WITH THE VIRGINIA DEPARTMENT OF TRANSPORTATION STANDARDS AND SPECIFICATIONS.

ENGINEER'S NOTES

T.P. PARKER & SON ASSUMES NO RESPONSIBILITY FOR ADEQUACY OF PLANS OR FOR INFORMATION ON PLANS UNTIL SUCH PLANS HAVE BEEN APPROVED BY THE REQUIRED PUBLIC AGENCIES.

ANY WORK COMMENCED ON A PROJECT PRIOR TO PLAN APPROVAL IS AT SOLE RISK OF THE DEVELOPER.

T.P. PARKER & SON DOES NOT GUARANTEE THE COMPLETION OR QUALITY OF PERFORMANCE OF THE CONTRACTS OR THE COMPLETION OR QUALITY OF PERFORMANCE OF CONTRACTS BY SUBCONTRACTORS OR OTHER THIRD PARTIES.

SOURCE OF TOPOGRAPHIC MAPPING IS T.P. PARKER & SON
DATED FEBRUARY 1998

BOUNDARY SURVEY WAS PERFORMED BY
DATED

SEWER NOTES

A MINIMUM COVER OF THREE (3) FEET IS REQUIRED OVER PROPOSED LINES.

CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND UNCOVERING ALL MANHOLES AFTER PAVING. MANHOLE TOPS SHALL BE ADJUSTED TO GRADE IF NECESSARY.

ALL EXISTING UTILITIES MAY NOT BE SHOWN, OR MAY NOT BE SHOWN IN THE EXACT LOCATION. THE CONTRACTOR SHALL COMPLY WITH STATE WATER WORKS REGULATIONS, SECTION 12.05.03, WHERE LINES CROSS.

HOUSE CONNECTIONS ARE TO BE MADE WITH 4" PIPE INSTALLED ON A MINIMUM GRADE OF 1/4 INCH TO 1 FOOT IN THE RIGHT OF WAY.

LATERALS FROM MANHOLES SHALL BE P.V.C. OR DUCTILE IRON OF SUFFICIENT LENGTH TO PROVIDE TWO (2) FEET OF BEARING ON NATURAL GROUND. THE TRANSITION FROM DUCTILE IRON TO ASBESTOS CEMENT OR CONCRETE PIPE SHALL BE MADE WITH AN ADAPTOR COUPLING IN THE RIGHT OF WAY.

ALL TRENCHES IN EXISTING OR FUTURE HIGHWAY RIGHT OF WAYS SHALL BE COMPACTED ACCORDING TO CITY OF ROANOKE STANDARDS.

LINES SHALL BE STAKED PRIOR TO CONSTRUCTION.

ALL NEW SANITARY SEWER SHALL BE SDR-35 P.V.C. PIPE OR CITY OF ROANOKE APPROVED EQUAL.

WATER NOTES

A MINIMUM COVER OF THREE (3) FEET IS REQUIRED OVER PROPOSED LINES.

CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND UNCOVERING VALVE VAULTS AFTER PAVING AND ADJUSTMENT TO FINAL GRADE IF NECESSARY.

ALL EXISTING UTILITIES MAY NOT BE SHOWN, OR MAY NOT BE SHOWN IN THE EXACT LOCATION. THE CONTRACTOR SHALL COMPLY WITH STATE WATER WORKS REGULATIONS, SECTION 12.05.03, WHERE LINES CROSS.

ALL TRENCHES IN EXISTING OR FUTURE HIGHWAY RIGHT OF WAYS SHALL BE COMPACTED ACCORDING TO CITY OF ROANOKE STANDARDS.

LINES SHALL BE STAKED PRIOR TO CONSTRUCTION.

WATER MAIN SHALL BE MINIMUM CLASS 51 DUCTILE IRON IN ACCORDANCE TO AWWA C151 OR SDR-35 PVC IN ACCORDANCE TO C-900.

APPLICATION FOR UTILITIES TO SERVE DEVELOPMENT REFERENCE NUMBER

STANDARD CITY OF ROANOKE CONSTRUCTION PROCEDURE REQUIREMENTS

CITY INSPECTIONS: TO ENSURE THE COORDINATION OF TIMELY AND PROPER INSPECTIONS, A PRECONSTRUCTION CONFERENCE SHALL BE INITIATED BY THE CONTRACTOR WITH THE CITY OF ROANOKE DEPARTMENT OF ZONING AND DEVELOPMENT (703) 981-2250 OR 981-1325 TO ARRANGE A CONFERENCE AT LEAST THREE (3) DAYS PRIOR TO ANTICIPATED CONSTRUCTION.

STREET OPENING PERMIT: PRIOR TO THE COMMENCEMENT OF ANY DIGGING, ALTERATION, OR CONSTRUCTION WITHIN THE PUBLIC RIGHT-OF-WAY (STREETS, ALLEYS, PUBLIC EASEMENTS) A STREET OPENING PERMIT SHALL BE APPLIED FOR AND OBTAINED BY THE CONTRACTOR FROM THE CITY OF ROANOKE.

PLANS AND PERMITS: A COPY OF THE PLANS APPROVED BY THE CITY OF ROANOKE (SIGNED BY THE PROPER CITY OFFICIALS) AND ALL PERMITS ISSUED BY THE CITY SHALL BE MADE AVAILABLE AT THE CONSTRUCTION SITE AT ALL TIMES OF ONGOING CONSTRUCTION.

LOCATION OF UTILITIES: THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL EXISTING UTILITIES PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION.

CONSTRUCTION ENTRANCE: THE CONTRACTOR SHALL INSTALL AN ADEQUATE CONSTRUCTION ENTRANCE FOR ALL CONSTRUCTION-RELATED EGRESS FROM THE SITE. THE SIZE AND COMPOSITION OF THE CONSTRUCTION ENTRANCE SHALL BE DETERMINED BY THE CITY OF ROANOKE SITE PLAN INSPECTOR.

STREETS TO REMAIN CLEAN: IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT THE PUBLIC STREET ADJACENT TO THE CONSTRUCTION ENTRANCE REMAINS FREE OF MUD, DIRT, DUST, AND/OR ANY TYPE OF CONSTRUCTION MATERIALS OR LITTER AT ALL TIMES.

BARRICADES/DITCHES: THE CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL EXCAVATED DITCHES AND SHALL FURNISH AND ENSURE THAT ALL BARRICADES PROPER AND NECESSARY FOR THE SAFETY OF THE PUBLIC ARE IN PLACE.

SEWER AND PAVEMENT REPLACEMENT: CONSTRUCTION OF SANITARY SEWERS AND THE REPLACEMENT OF PAVEMENT SHALL BE IN ACCORDANCE WITH APPROVED STANDARDS AND SPECIFICATIONS OF THE CITY OF ROANOKE.

APPROVED PLANS/CONSTRUCTION CHANGES: ANY CHANGE OR VARIATION FROM CONSTRUCTION DESIGN AS SHOWN ON THE OFFICIALLY APPROVED PLANS SHALL BE APPROVED BY THE CITY ENGINEER PRIOR TO SAID CHANGES OR VARIATIONS ON CONSTRUCTION BEING MADE.


FINAL ACCEPTANCE/CITY: THE DEVELOPER OR CONTRACTOR SHALL FURNISH THE CITY OF ROANOKE ENGINEERING DEPARTMENT WITH A FINAL CORRECT SET OF AS-BUILT PLANS PRIOR TO FINAL ACCEPTANCE BY THE CITY.

NOTICE: ALL LANDOWNERS, DEVELOPERS, AND CONTRACTORS

FAILURE TO COMPLY WITH THE CONSTRUCTION PROCEDURE REQUIREMENTS LISTED ABOVE MAY RESULT IN THE COSTLY REMOVAL OF STRUCTURES, TIME DELAYS, OR THE ISSUANCE OF A STOP WORK ORDER.

VICINITY MAP

NO SCALE

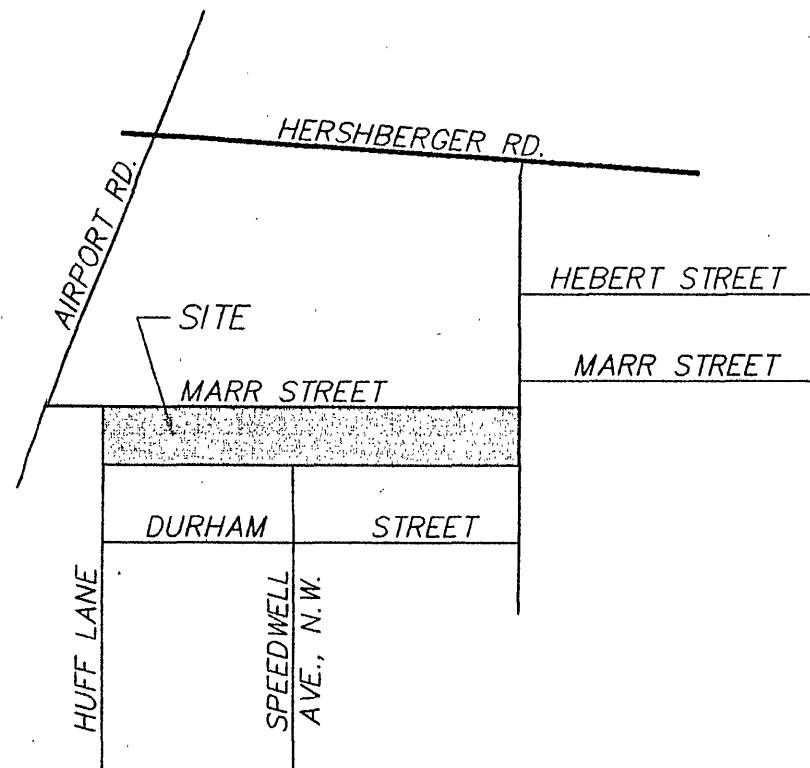

VICINITY MAP

Designed By: JPR	REVISIONS			
	No.	Date	Remarks	By
Drawn By: JPR	1	3/26	CITY OF ROANOKE REVIEW COMMENTS	JPR
Date: 3/5/98				
W.O. # 97-1602				
N.B. # F-17				

SHEET INDEX

SHEET #	TITLE
1	COVER SHEET
2	SUBDIVISION PLAT
3	SITE DIMENSIONAL LAYOUT PLAN
4	SITE UTILITY & LANDSCAPING PLAN
5	SITE GRADING & EROSION CONTROL PLAN
6	SANITARY SEWER, STORM DRAIN & WATERMAIN PROFILES
7	CITY OF ROANOKE ST'D SANITARY SEWER DETAILS
8	CITY OF ROANOKE ST'D WATER DETAILS

ANY VARIATION FROM APPROVED PLANS MUST
BE APPROVED BY THE CITY OF ROANOKE

LEGEND

ABBREVIATIONS		SYMBOLS	
		EXISTING	NEW
AHFF	ARROW HEAD TOP OF FIRE HYDRANT	100.5 E	100.5
APPROX	APPROXIMATE	100	100
ASPH	ASPHALT	8"SS	8"SS
BC	BOTTOM OF CURB	4"W	4"W
BIT	BITUMINOUS	8"SD	8"SD
BLDG	BUILDING	2"G	2"G
BLK	BLOCK	E	E
BM	BENCHMARK	R/W	R/W
BW	BOTTOM OF WALL	REQD	REQD
CB	CINDER BLOCK	RR	RR
C&G	CURB & GUTTER	RYS	RYS
CIP	CORRUGATED METAL PIPE	SAN	SAN
CONC	CONCRETE	SBL	SBL
COR	CORNER	SD	SD
DBL	DOUBLE	SECT	SECT
DEFL	DEFLECTION	SE	SE
D	DROP INLET	SSE	SSE
DIA	DIAMETER	STA	STA
DE	DRAINAGE EASEMENT	STN	STN
EBL	EAST BOUND LINE	STD	STD
ELEC	ELECTRIC	STO	STO
ELEV	ELEVATION	SYS	SYS
ENTR	ENTRANCE	TCM	TCM
EP	EDGE OF PAVEMENT	TC	TC
EW	EXISTING	TEL	TEL
EXIST	EXISTING	TRANS	TRANS
FDN	FOUNDATION	TW	TW
FF	FINISHED FLOOR	TYP	TYP
FC	FINISH GRADE	VDOT	VDOT
HPT	HIGH POINT	VERT	VERT
INV	INVERT	YLD	YLD
IP	IRON PIN	YLD	YLD
LT	LEFT	YLD	YLD
MBL	MINIMUM BUILDING LINE	YLD	YLD
MH	MANHOLE	YLD	YLD

NAME OF
DEVELOPMENT

DORCHESTER COURT
SECTION 5

LOCATION

MARR STREET

OWNER



PIEDMONT CONSTRUCTION
CORPORATION OF VIRGINIA

DEVELOPER

PIEDMONT CONSTRUCTION
CORPORATION OF VIRGINIA

CITY OF ROANOKE TAX PARCEL

227-0230

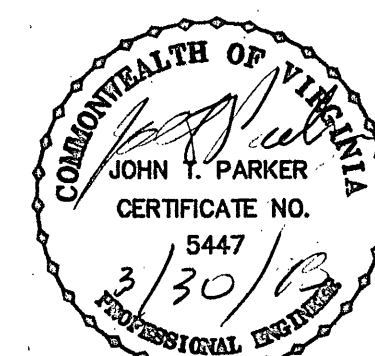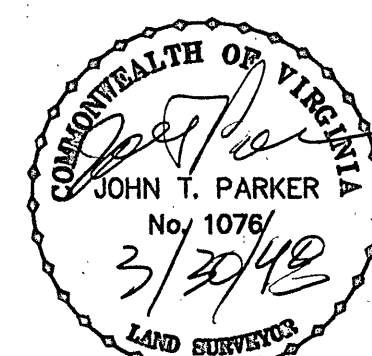

T.P. PARKER & SON
ENGINEERS
SURVEYORS
PLANNERS

T. P. PARKER & SON

816 Boulevard
Post Office Box 39
Salem, Virginia 24153
Telephone: 540-387-1153
FAX: 540-389-5767

APPROVED:

[Signature] 3/26/98
AGENCY CITY OF ROANOKE
PLANNING COMMISSION DATE

[Signature] 3/26/98
CITY ENGINEER - CITY OF
ROANOKE, VIRGINIA DATE

110,000 Boro