

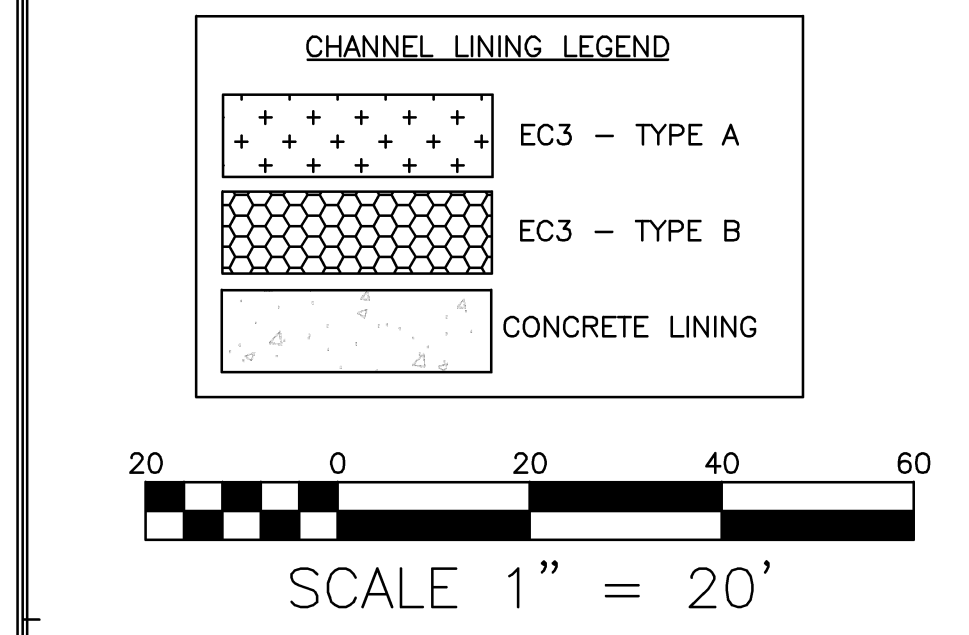
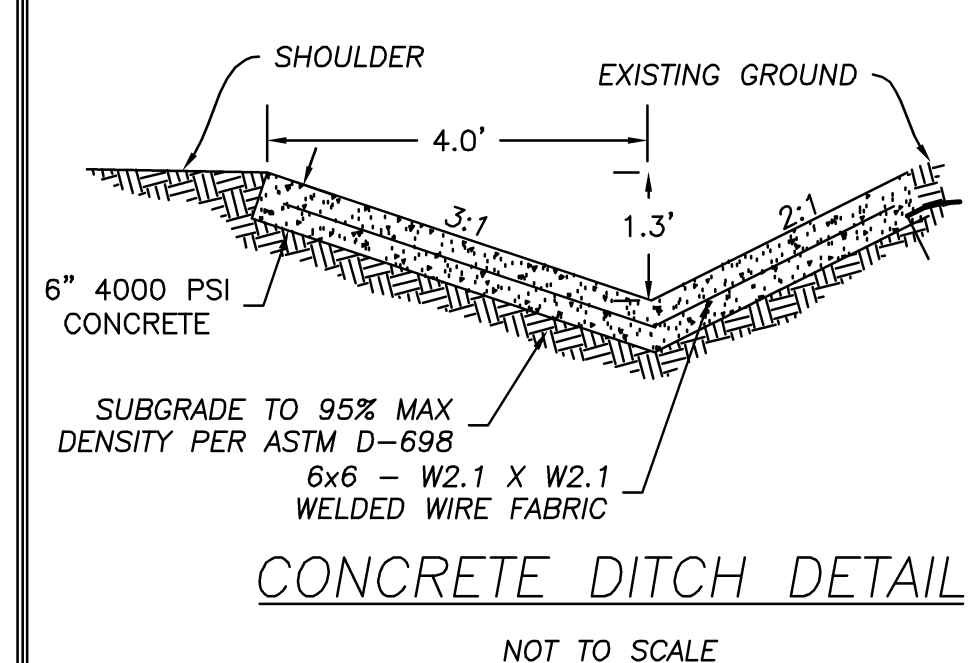
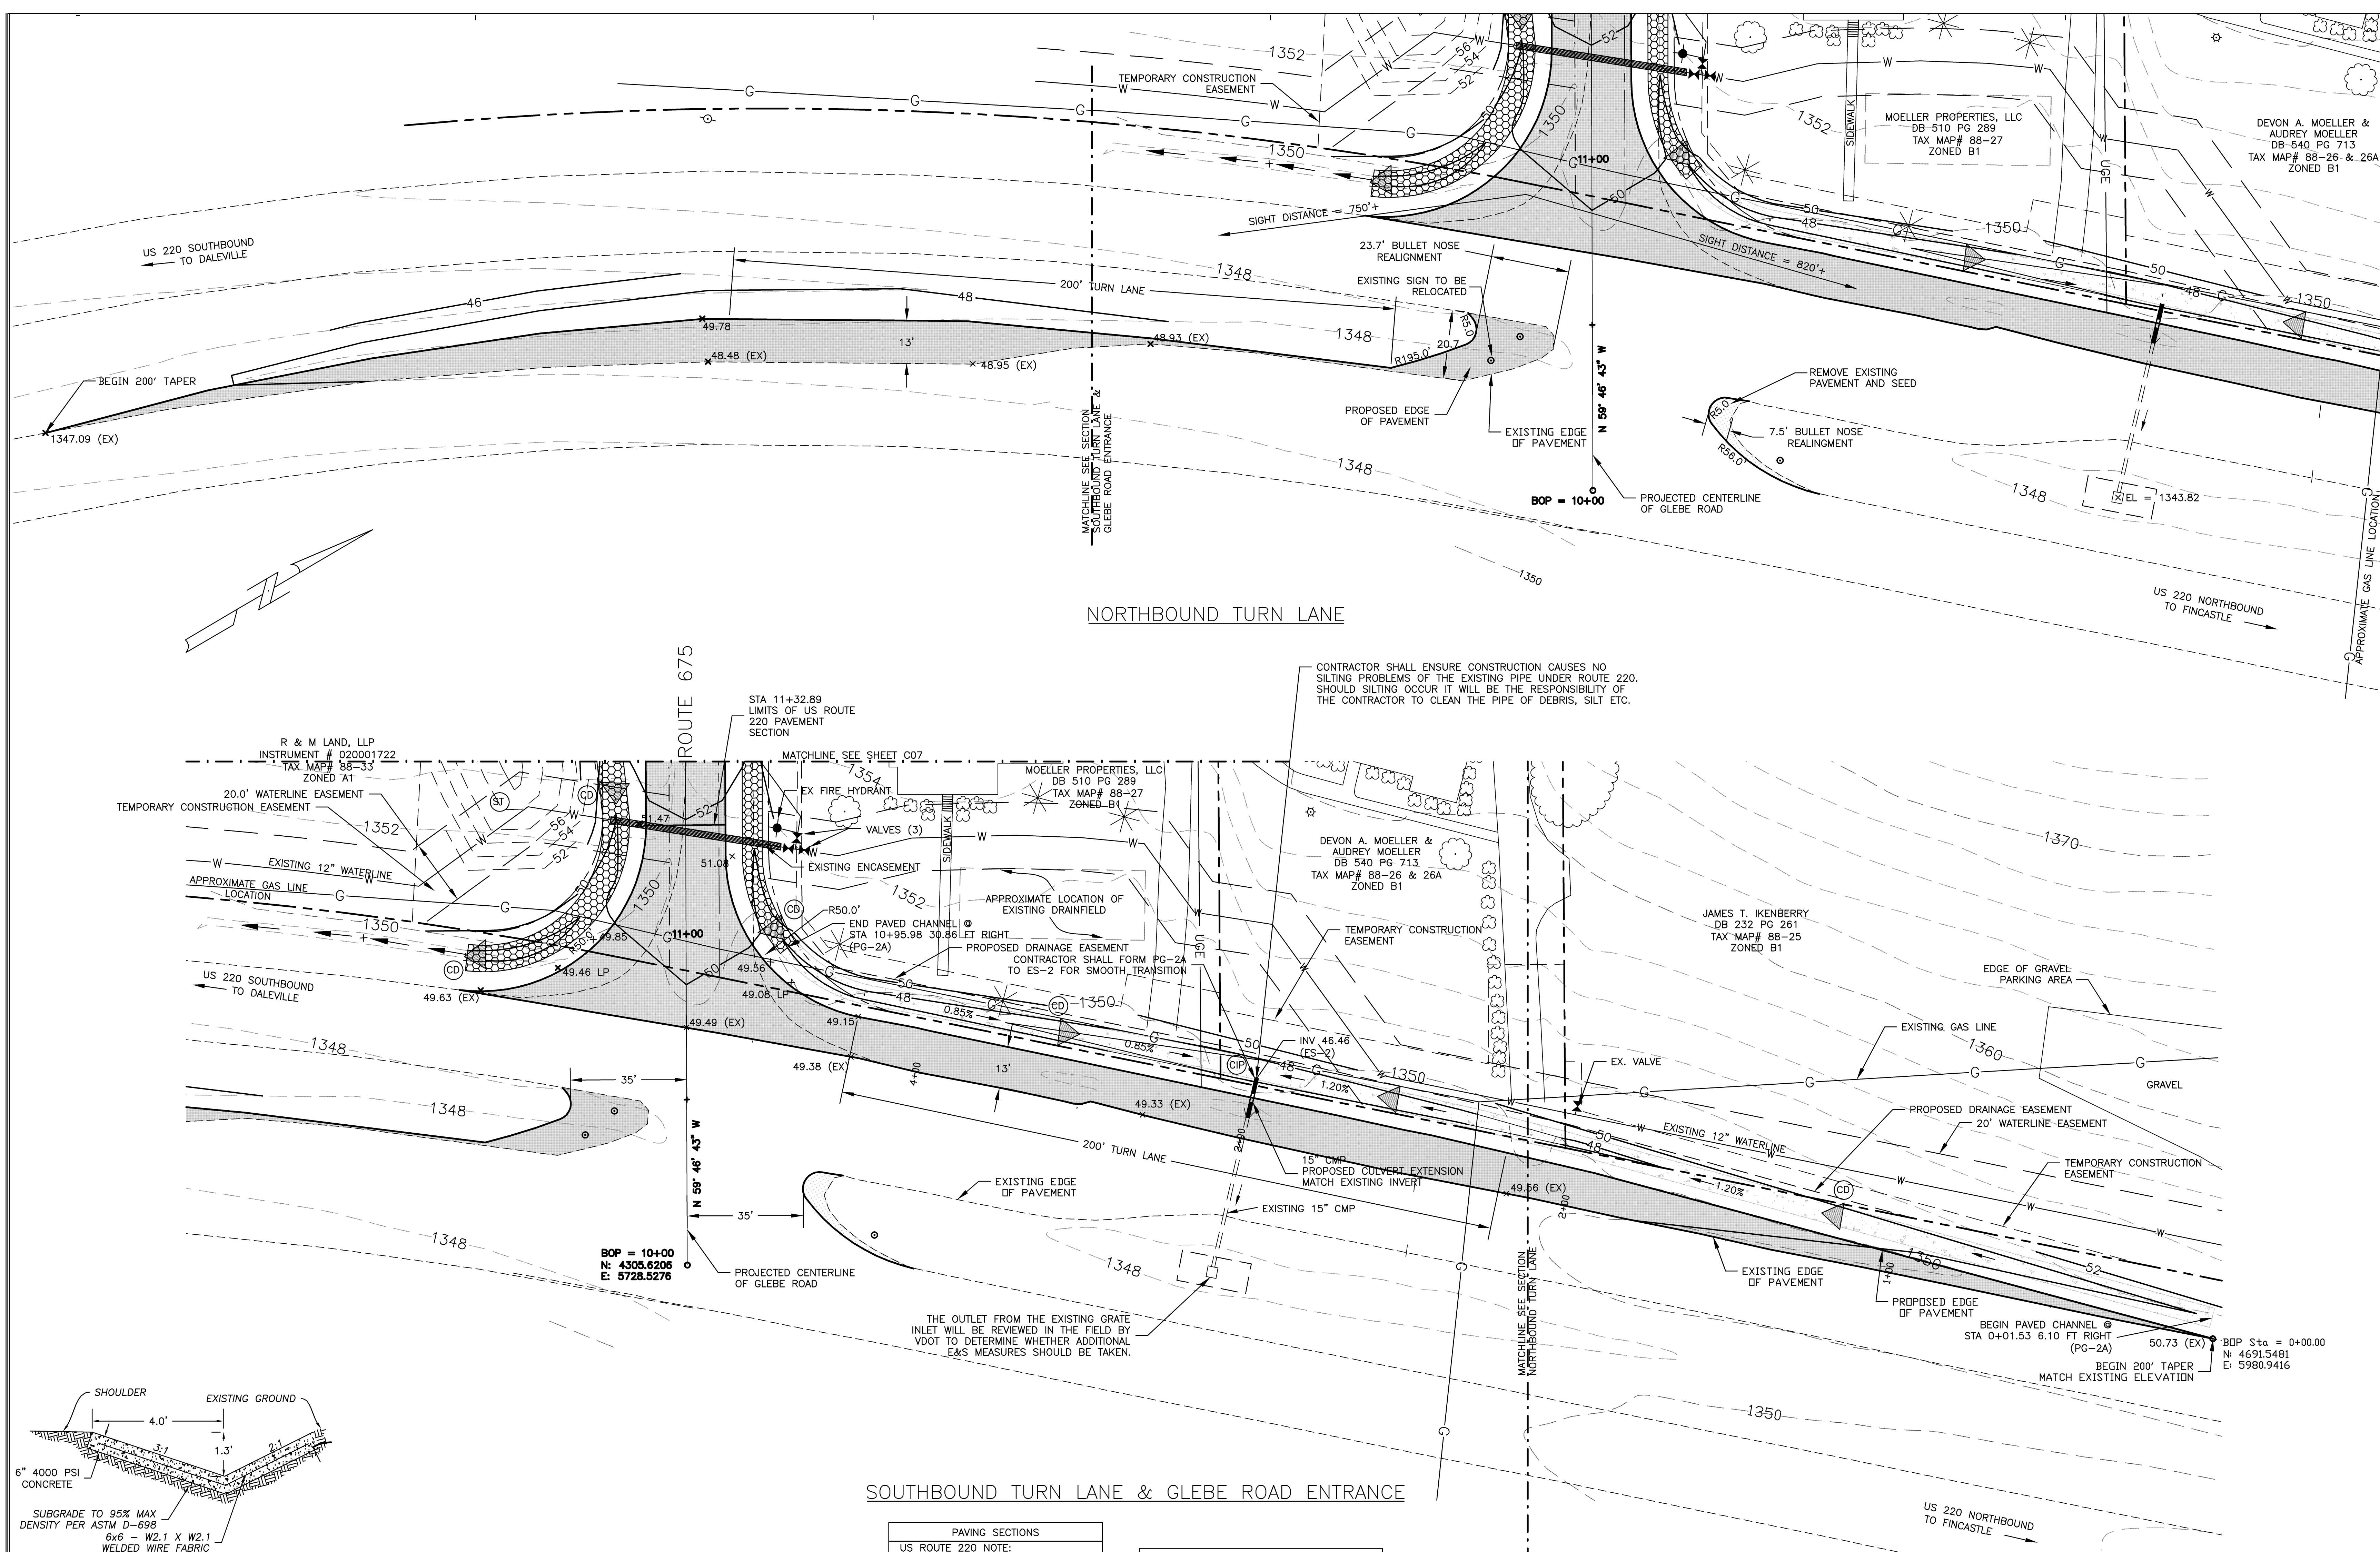
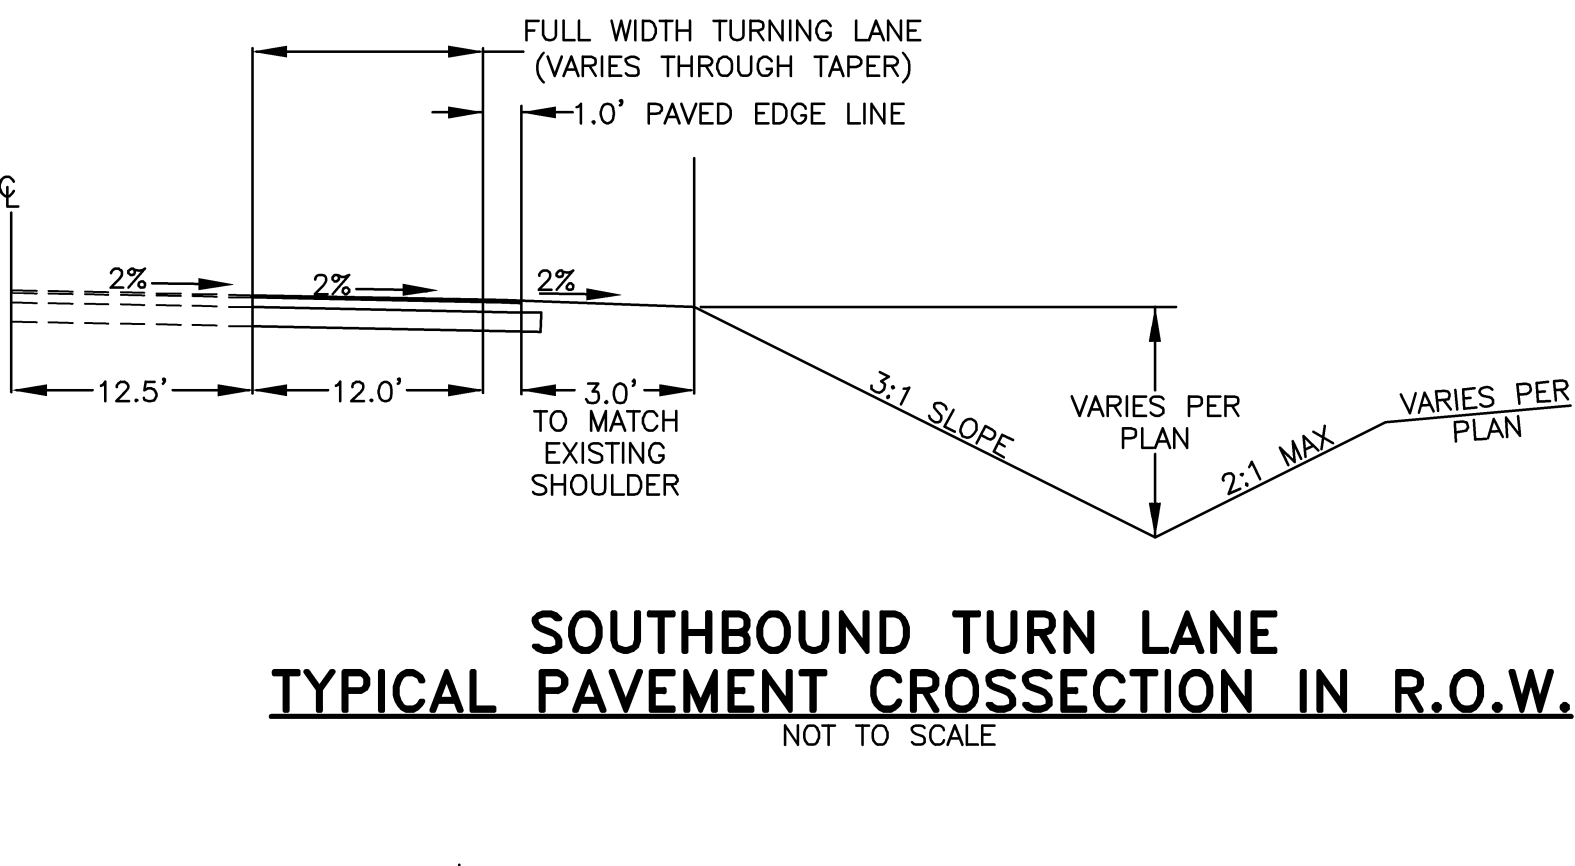


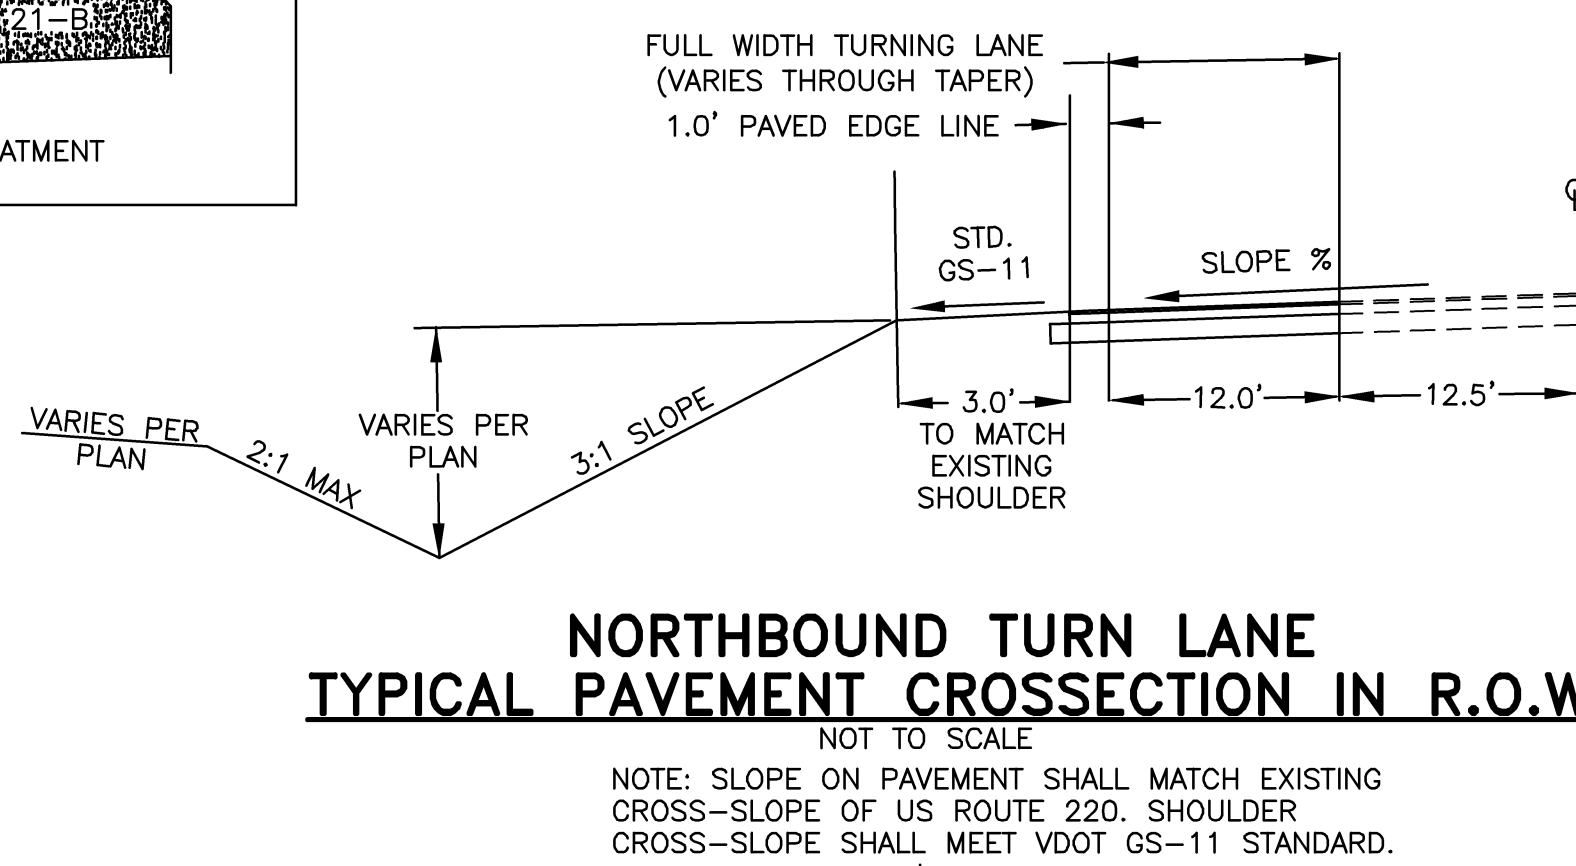

SOUTHBOUND TURN LANE & GLEBE ROAD ENTRANCE

PAVING SECTIONS	
US ROUTE 220 NOTE: PAVEMENT SECTION WITHIN US ROUTE 220 RIGHT-OF-WAY SHALL BE: - 165#/SY SM 9.5A TOP COURSE - 6" BM-25.0 ASPHALT CONCRETE - 8" 21-B AGGREGATE BASE (EXTENDED THROUGH SHOULDER) - SUBGRADE COMPACTED TO 95% DENSITY PER ASTM D-698	
ROUTE 675 NOTE: PAVEMENT SECTION WITHIN US ROUTE 675 RIGHT-OF-WAY SHALL BEGIN AT THE RADIUS RETURN FROM US ROUTE 220 AND BE: - 1 1/2" SM-9.5A TOP COURSE - 5" BM-25.0, ASPHALT CONCRETE - 6" 21-B AGGREGATE BASE (EXTENDED THROUGH SHOULDER) - SUBGRADE COMPACTED TO 95% DENSITY PER ASTM D-698	
PRIVATE DRIVE NOTE: PRIVATE DRIVE PAVING SECTION SHALL BE: - 2" SM-9.5A TOP COURSE - 6" 21-B AGGREGATE BASE	

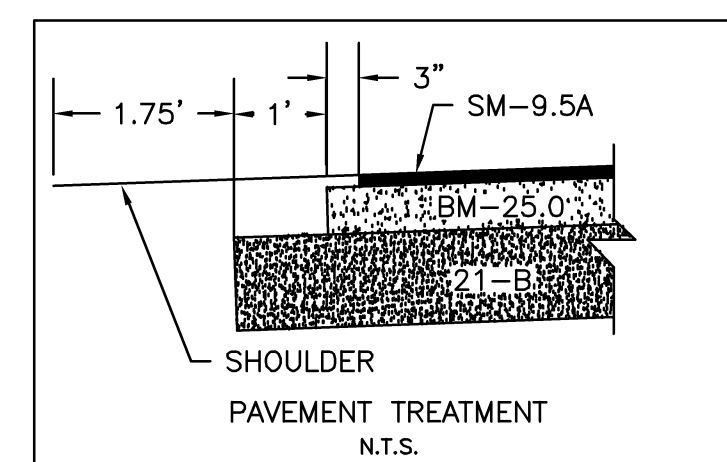

KEYPLAN

ENGINEERING CONCEPTS, INC.

20 South Roanoke St.
Fincastle, Virginia 24090
540.473.1253 540.473.1254(Fax)
email@engineeringconcepts.com
ECI PROJECT #02019

GENERAL NOTES

PROJECT TITLE

The Glebe

SFCS

SFCS Inc. • 305 South Jefferson Street
Roanoke, Virginia 24011.2003
540.344.6664 • Fax 540.343.6925
www.sfcs.com

PROJECT DESIGNER	: SFCS	
PROJECT ARCHITECT	: SFCS	
PROJECT ENGINEER	: ECI	
DRAWN BY	: ECI	
CHECKED BY	: ECI	
APPROVED BY	: ECI	
NO.	REVISION DESCRIPTION	DATE
1	VDOT, VDH, & BOTETOURT	02/07/03
2	COUNTY COMMENTS	
2	VDOT	03/31/03

DRAWING TITLE

GLEBE ROAD ENTRANCE PLAN

COMM. NO.	DATE
47115.00	11/12/03
DRAWING	SHEET
C6	6 OF 43