0.5 CY CLEAN STONE VDOT #57

CONCRETE BASE AND THRUST BLOCK (IF REQUIRED) AGAINST UNDISTURBED SOIL, CONCRETE SHALL NOT COVER HYDRANT

(IF REQUIRE

TRACER WIRE SEE GENERAL DETA

APPROVED M.J. GLAND RESTRAIN


(i.e. MEGALUGS, GRIP RINGS OR UNI-FLANGE) SHALL BE USED AT


ALL M.J. FITTINGS


WESTERN VIRGINIA REGIONAL - CONSTRUCTION DETAIL


M.J. FITTINGS SHALL NOT


BE ENCASED IN CONCRETE

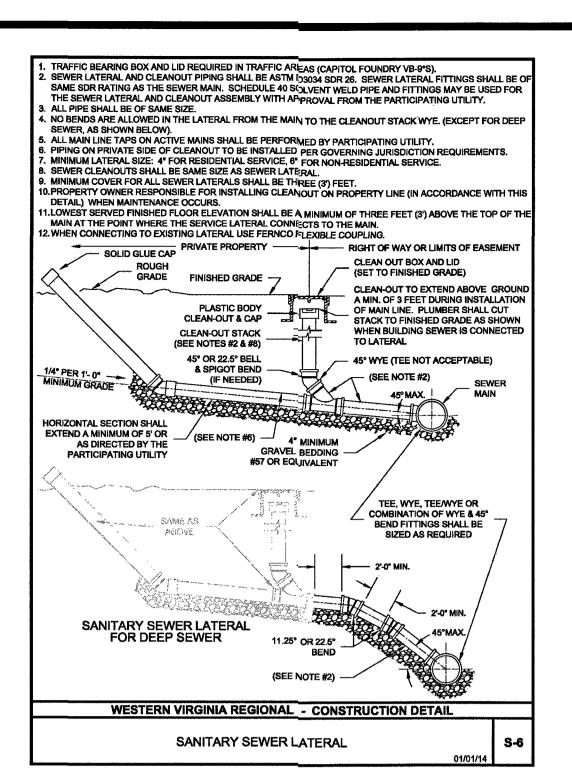


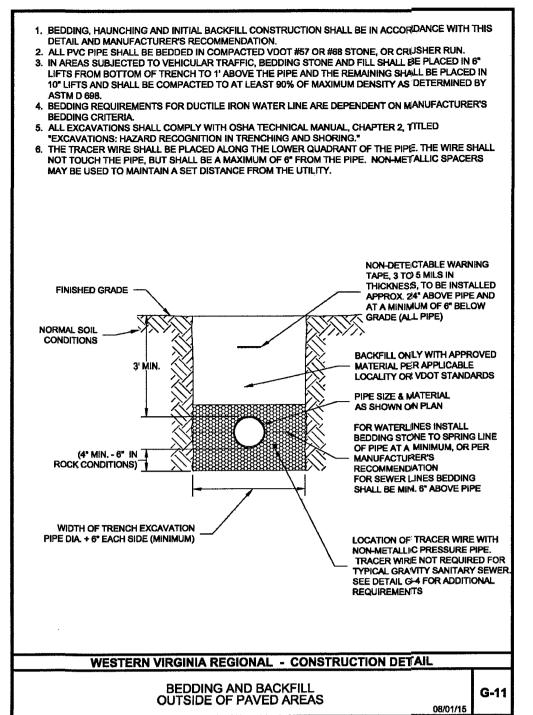


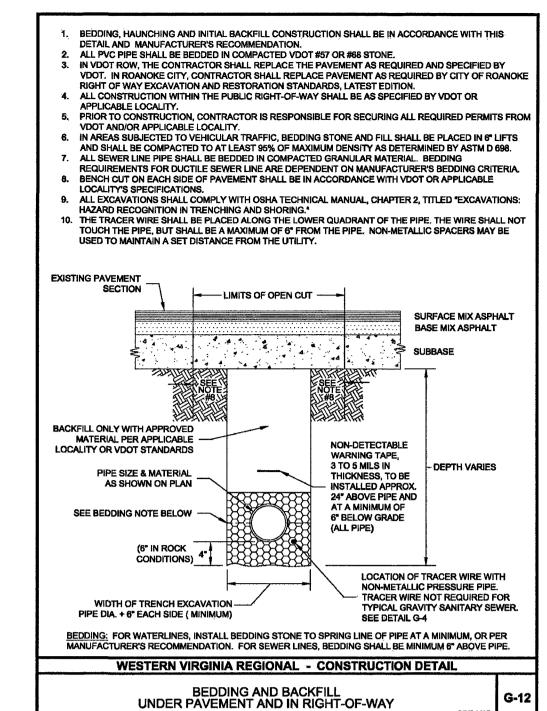


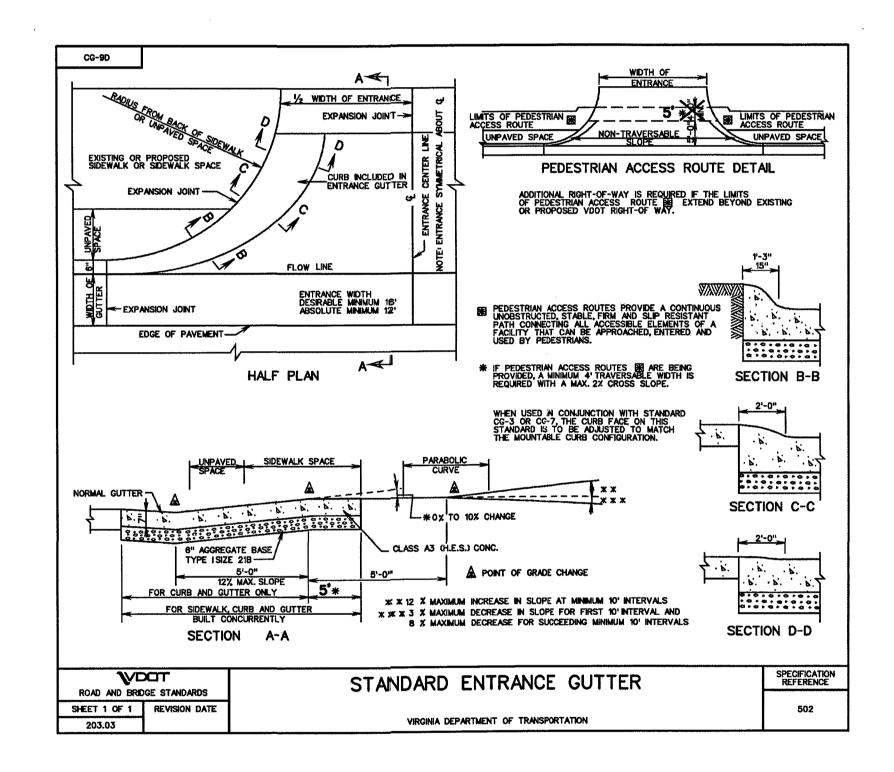


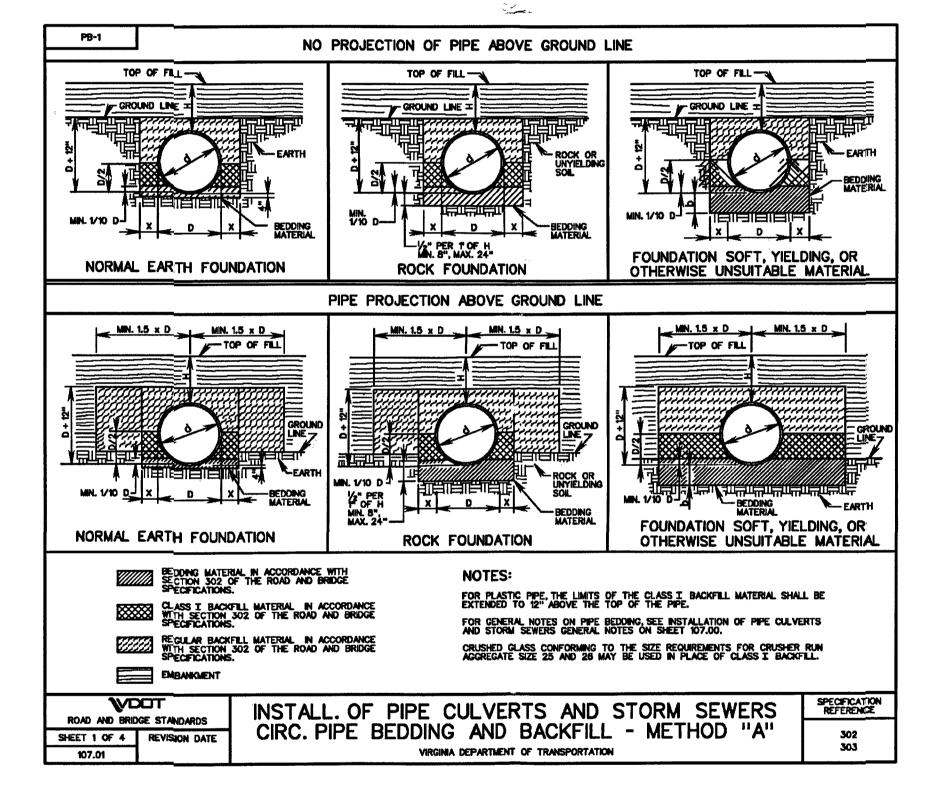

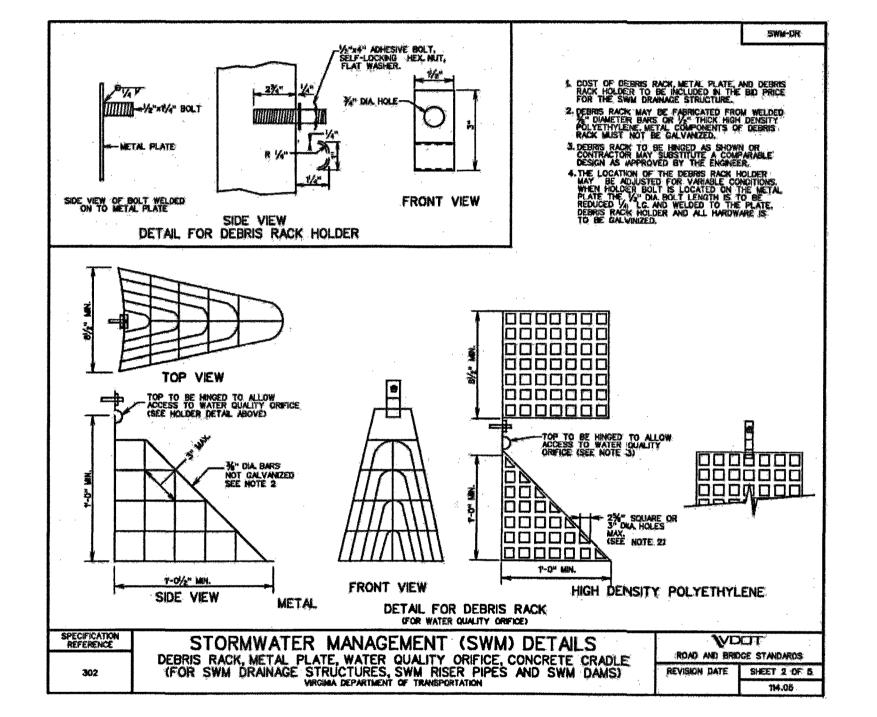


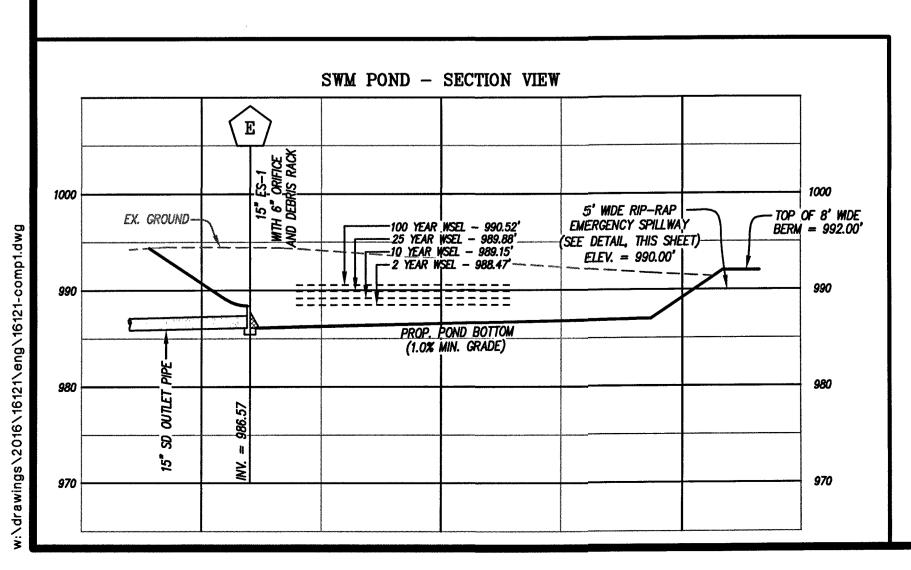

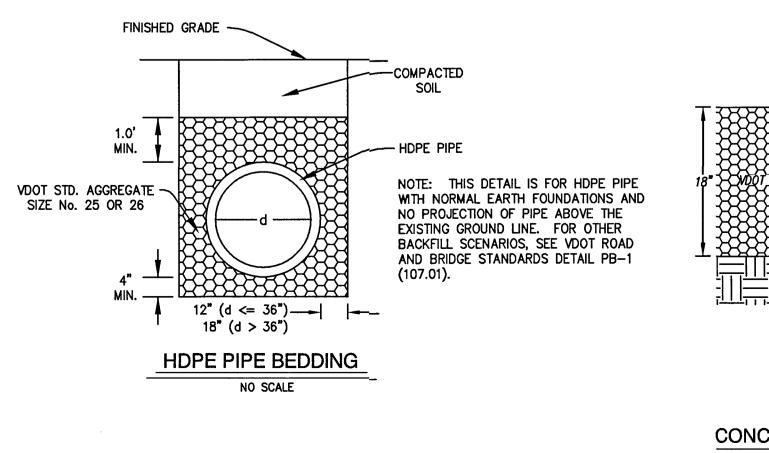

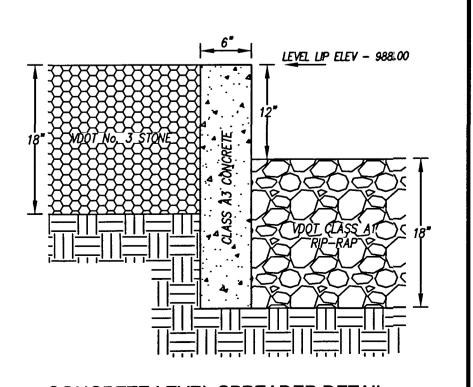

CONCRETE LEVEL SPREADER DETAIL NO SCALE

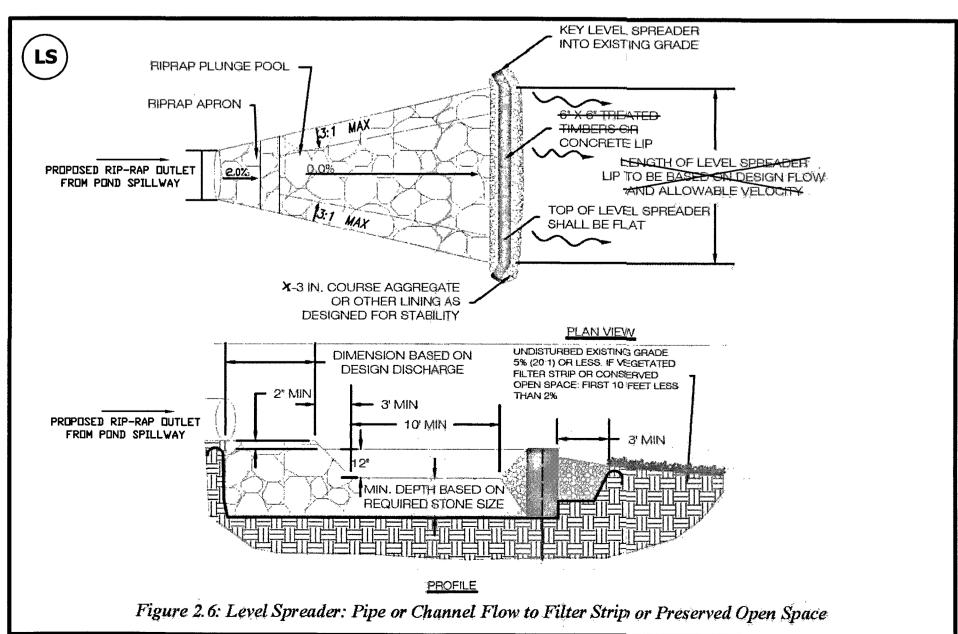

NOTE: LEVEL SPREADER TO MEET THE STANDARDS ACCORDING TO DEQ! STORMWATER DESIGN SPECIFICATION No. 2 BEING "SHEET FLOW TO FILTER OR OPEN SPACE".

March 15, 2017 OMMISSION NO: 16-121 SHEET 9 OF 10

LUMSDEN ASSOCIATES, P.C. ENGINEERS-SURVEYORS-PLANNERS ROANOKE, VIRGINIA

<u>NO</u>

CONST DE

CENTI

0

ís E

LNES ADDI

WE