


STOP BAR)
W/LINE
LINE
LINE, 4' SKIP)
LINE, 30' SKIP)
ROW (SINGLE)
W - REFERENCE ONLY (DO NOT STRIPE)

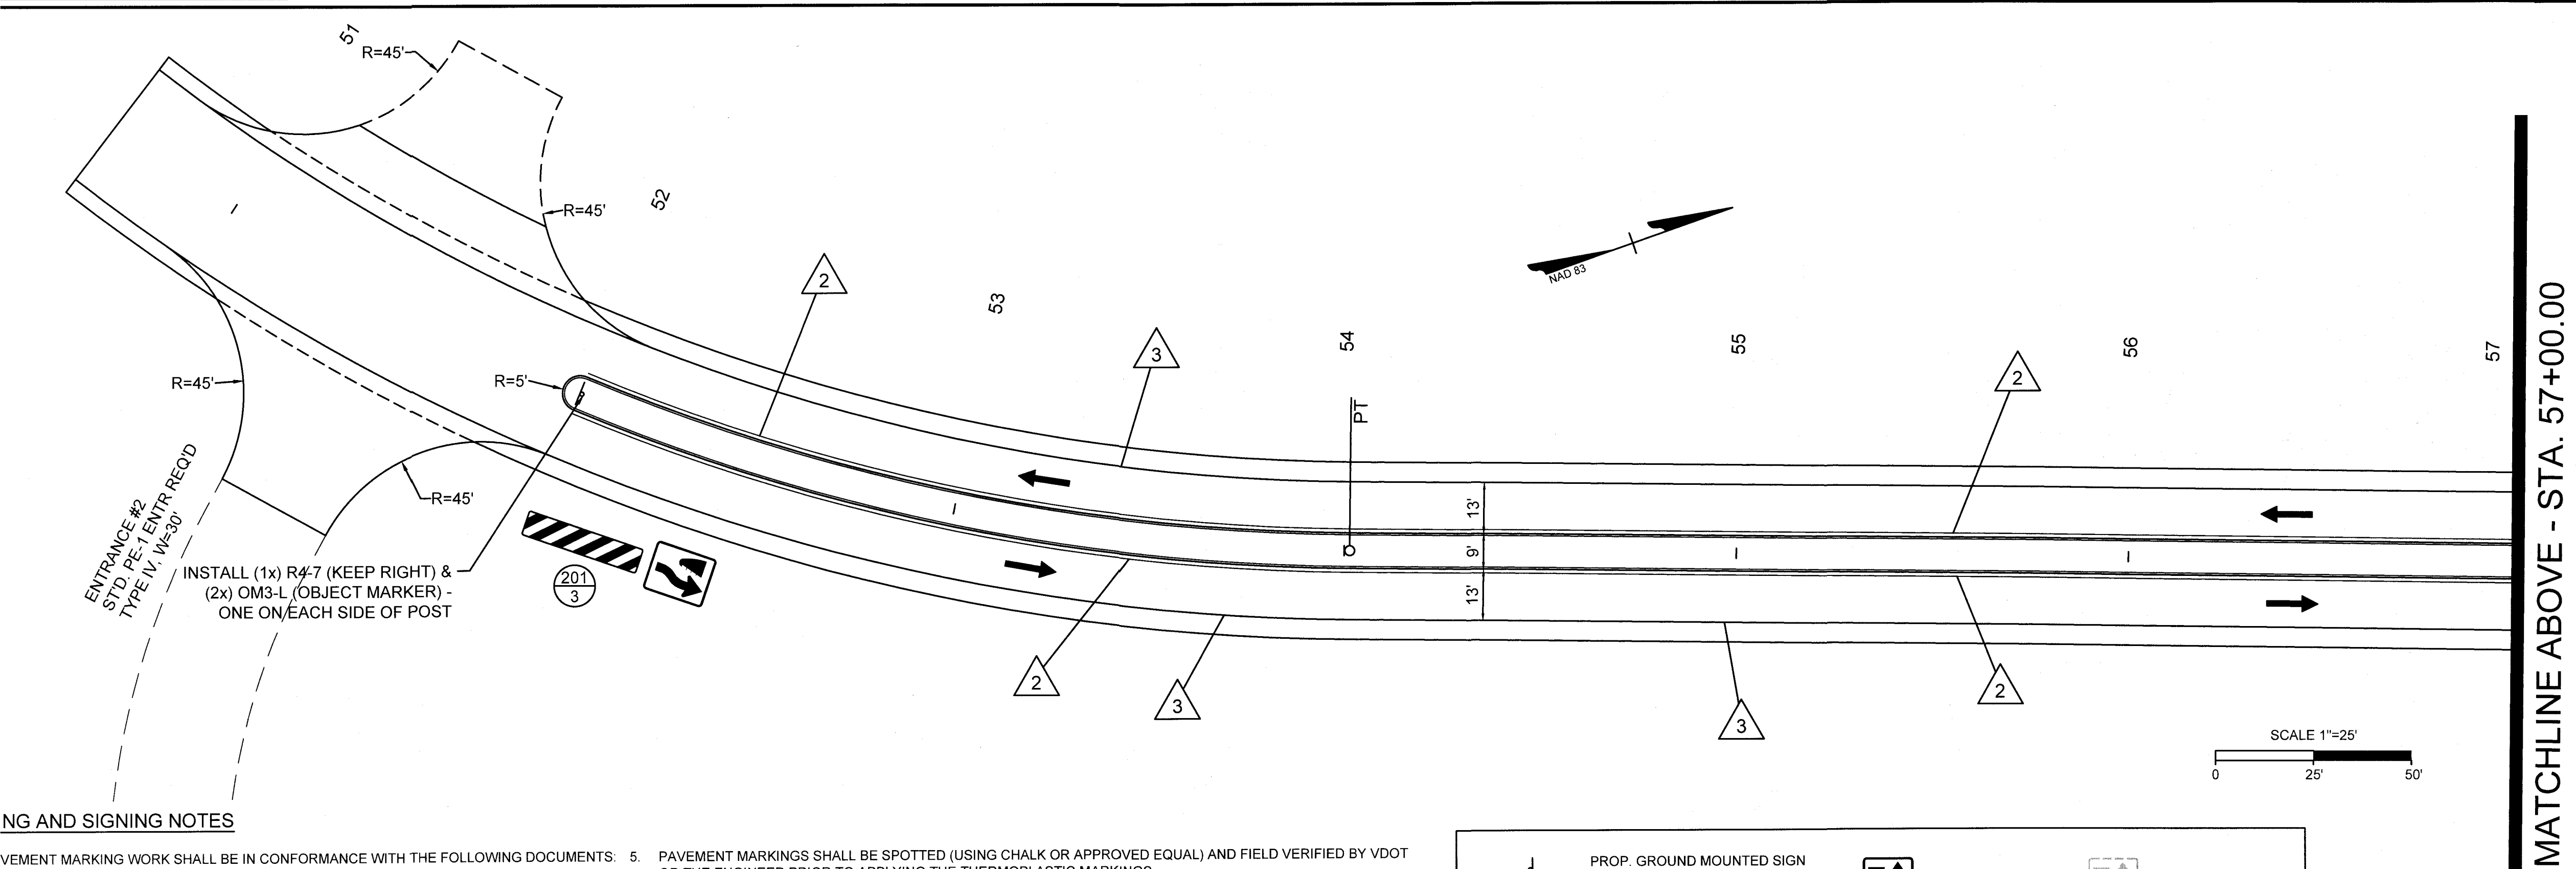

NG AND SIGNING NOTES

PAVEMENT MARKING WORK SHALL BE IN CONFORMANCE WITH THE FOLLOWING DOCUMENTS:
UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), REVISION 1 AND 2
PLEMENT TO THE 2009 MUTCD, REVISION 1
ND BRIDGE STANDARDS
ND BRIDGE SPECIFICATIONS
S IN EFFECT AT THE TIME THE PLANS ARE APPROVED
APPROVED BY THE ENGINEER OR INDICATED IN THE MAINTENANCE OF TRAFFIC AND
STRUCTION PLANS. EXISTING TRAFFIC SIGNS WHICH ARE TO BE REMOVED/RELOCATED
ACE UNTIL THE NEW SIGN STRUCTURE IS IN PLACE.
CATION, OR MODIFICATION OF EXISTING SIGN PANELS, STRUCTURES, OR FOUNDATIONS
SECTION 510 OF THE SPECIFICATIONS.
PROPOSED SIGN LOCATIONS ARE APPROXIMATE AND SHALL BE FIELD VERIFIED BY THE
ROPOSED SIGN LOCATIONS SHALL BE STAKED BY THE CONTRACTOR AND APPROVED BY

- PAVEMENT MARKINGS SHALL BE SPOTTED (USING CHALK OR APPROVED EQUAL) AND FIELD VERIFIED BY VDOT OR THE ENGINEER PRIOR TO APPLYING THE THERMOPLASTIC MARKINGS.
- ALL PERMANENT MARKINGS SHALL BE TYPE B, CLASS I UNLESS OTHERWISE DIRECTED BY VDOT TRAFFIC ENGINEERING.
- ALL PAVEMENT MARKINGS MUST HAVE A PERSON WITH A PAVEMENT MARKING CERTIFICATION ISSUED BY THE VDOT MATERIALS DIVISION ON SITE DURING PAVEMENT MARKING OPERATIONS.
- FOR ALL PROPOSED AND RELOCATED SIGNS, THE BOTTOM OF SIGN HEIGHT MUST BE AT LEAST 7' ABOVE GROUND (EXCEPT OM-3 SIGNS).
- ALL REPLACED OR RELOCATED SIGNS SHALL BE INSTALLED AS NEW SIGNS. EXISTING SIGNS SHALL NOT BE RE-USED.
- CONTRACTOR SHALL TIE ALL PROPOSED PAVEMENT MARKINGS TO EXISTING MARKINGS AT THE PROJECT LIMITS
- CONTRACTOR SHALL BE RESPONSIBLE FOR ERADICATION OF ALL EXISTING PAVEMENT MARKINGS WHICH ARE IN CONFLICT WITH PROPOSED STRIPING PLAN.

	PROP. GROUND MOUNTED SIGN STRUCTURE		PROP. SIGN PANEL		EX. SIGN PANEL
	EX. GROUND MOUNTED SIGN STRUCTURE				
	SIGN ASSEMBLY NO. TEXT NO.				
	STRUCTURE TYPE ACTION DESCRIPTION				
		G = REMOVE AND DISPOSE OF SIGN STRUCTURE Measured in units of each and included in lump sum contract price. Includes removal and disposal of sign panels, posts and foundations to at least two feet below existing ground line, backfilling and restoration (topsoiling and seeding), and for all materials, labor, tools, equipment, and incidentals necessary to complete the work.			