

Section A-A

Section A-A

PIPE OUTLET TO FLAT AREA

PIPE OUTLET TO WITH NO DEFINED CHANNEL

WELL-DRAINED CHANNEL

NOTES

1. APRON LINING MAY BE RIP-RAP, GROUTED RIP-RAP, OR CONCRETE.
2. L_d IS THE LENGTH OF THE RIP-RAP APRON AS CALCULATED USING PLATES 136d AND 136e.
3. $d = 1.5$ TIMES THE MAXIMUM STONE DIAMETER, BUT NOT LESS THAN 6".


MAX. SLOPE 2:1

WEEP HOLES FOR DEWATERING

LARGER PARTICLES WILL SETTLE

STORM WATER WITH LARGER PARTICLES REMOVED

DRAIN INLET

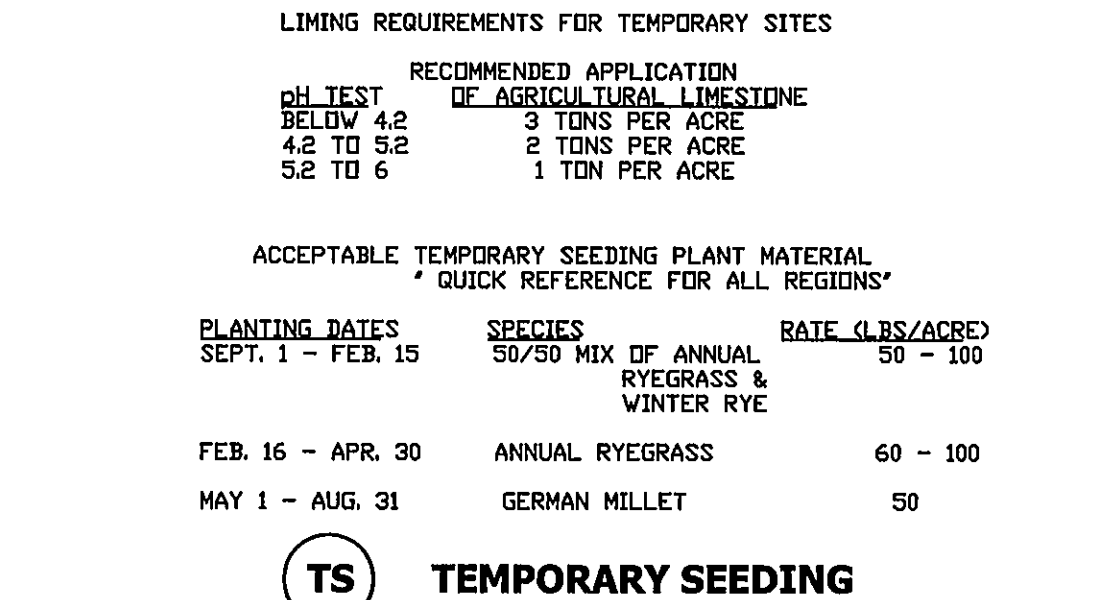

FD

TEMPORARY FILL DIVERSION

CROSS-SECTION

