



TWO (2) INCHES IN DIAMETER. CLAY SHALL BE PLACED IN SIX (6) INCH LIFTS AND COMPACTED BY MECHANICAL TAMPER TO NOT LESS THAN 95% OF MAXIMUM DENSITY AT OPTIMUM MOISTURE CONTENT. 2. HEIGHT OF TRENCH PLUG TO EXTEND 1' FROM FINAL GRADE.

> TRENCH PLUG DETAIL NOT TO SCALE

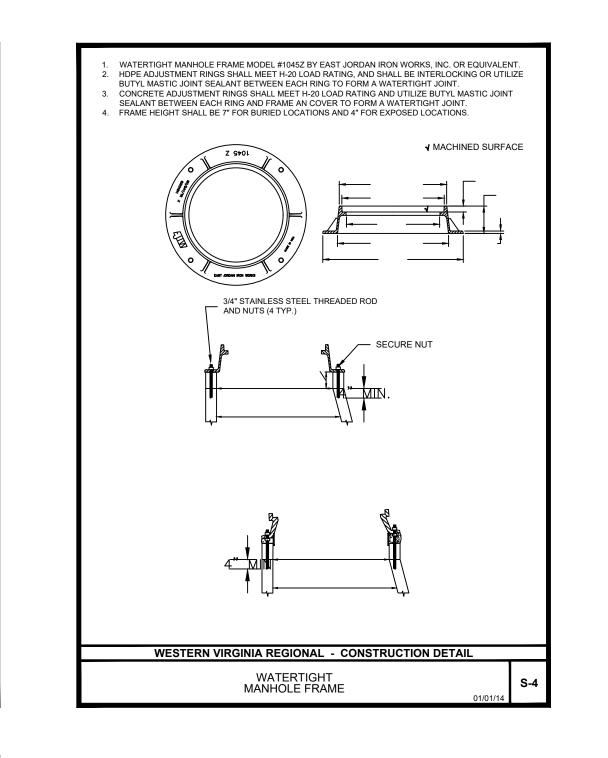

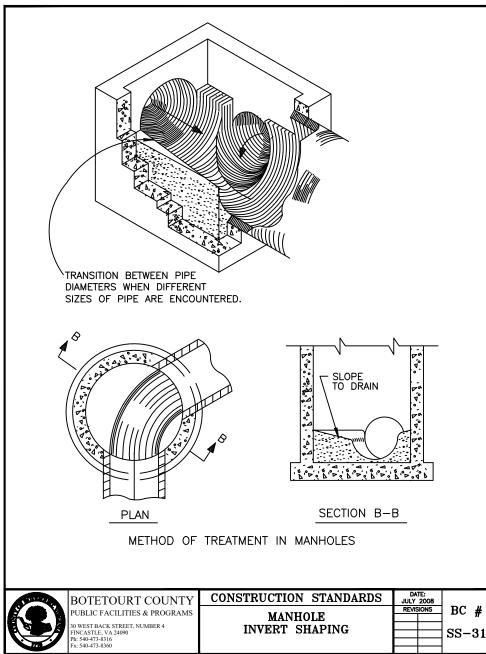

- FINAL GRADE

