

QUANTITY + COST ESTIMATE

ITEM	QUANTITY	UNIT	UNIT PRICE	COST	BONDABLE
CLEARING AND GRUBBING		ACRES	200.00		
EXCAVATION		LUMP SUM	50000.00		
EMBANKMENT		C.Y.			
VDOT STD CURB INLET DI-3B	7	EACH	2000.00	14,000.00	14,000.00
CURB INLET DI-3C	3	EACH	2000.00	6000.00	6000.00
DROP INLET DI-1		EACH			
MANHOLE MH-	3	EACH	1200.00	3600.00	3600.00
15-IN. RCP (ENTRANCE CULVERT)		LIN. FT.	35.00		
24-IN. CONCRETE PIPE, CLASS III		LIN. FT.			
12-IN. HDPE STORM DRAIN PIPE	620.00	LIN. FT.	24.00	14,880.00	14,880.00
15-IN. HDPE STORM DRAIN PIPE	820	LIN. FT.	25.00	20,500.00	20,500.00
18-IN. HDPE STORM DRAIN PIPE	330	LIN. FT.	27.50	9075.00	9075.00
36-IN. HDPE STORM DRAIN PIPE	560	LIN. FT.	35.00	19,600.00	19,600.00
-IN. C.M. CULVERT		LIN. FT.			
-IN. C.M. CULVERT		LIN. FT.			
BOX CULVERT		LUMP SUM			
PAVED DITCH		LIN. FT.			
RIPRAP - CLASS		S.Y.	25.00		
SODDED SWALE		S.Y.			
-IN. CONCRETE ENDWALL EW-		EACH			
15-IN. END SECTION ES-1		EACH	500.00		
HEADER CURB & GUTTER		LIN. FT.			
CURB & GUTTER: VDOT STD CG-6	5850	LIN. FT.	10.00	58,500.00	58,500.00
VALLEY GUTTER		EACH			
GRAVEL BASE		S.Y.			
GRAVEL SHOULDER		S.Y.			
SURFACE TREATMENT		S.Y.			
-IN. BIT. CONC.: TYPE B-		S.Y.			
2-IN. BIT. CONC.: TYPE SM-9.5	1145	TONS	70.00	80,150.00	80,150.00
8-IN. BASE MATERIAL (VDOT #21-A'S)	4675	TONS	12.50	58,437.50	58,437.50
-IN. SUBBASE MATERIAL		C.Y.			
		S.Y.			
TRAFFIC BARRICADE		EACH			
6" WATER LINE(C900)	3060	LIN. FT.	15.00	45,900.00	45,900.00
1" WATER LINE SERVICE CONN W/METER	31	EA	400.00	12,400.00	12,400.00
3/4" WATER LINE SERVICE CONN W/METER	1	EA	400.00	400.00	400.00
FIRE HYDRANT ASSEMBLIES	5	EACH	1,800.00	9,000.00	9,000.00
BLOW OFFS W/VAULT, FRAME & COVER	1	EACH	1,200.00	1,200.00	1,200.00
6-IN. GATE VALVES, W/VAULT, FRAME & COVER	6	EACH	650.00	3,900.00	3,900.00
8-IN. GATE VALVES, W/VAULT, FRAME & COVER		EACH	750.00		
AUTOMATIC AIR RELEASE ASSEMBLY	1	EACH	1,200.00	1,200.00	1,200.00
8" SANITARY SEWER	2875	LIN. FT.	22.50	64,687.50	64,687.50
4" SERVICE CONNECTION W/CLEANOUT STACK	63	EA	600.00	37,800.00	37,800.00
STANDARD CONCRETE SAN. SEWER MANHOLE	78	LIN. FT.	175.00	13,650.00	13,650.00
MANHOLE FRAME & COVER	13	EACH	300.00	3,900.00	3,900.00
35' - 18" STEEL CASING (BORE & JACK)		EACH	5000.00		
DITCH/ROAD SIDE RESTORATION(OFF-SITE SEWER)		LUMP SUM	1000.00		
AS-BUILT PLANS		LUMP SUM	500.00		
SUBTOTAL					478,780.00
10% CONTINGENCY					47,878.00
ESTIMATED TOTAL					526,658.00
I HEREBY CERTIFY THAT THE FOREGOING ESTIMATE REFLECTS THE CURRENT IMPROVEMENT COSTS OF THIS PROJECT.					
SIGNED:			DATE:		

GENERAL NOTES

All construction methods and materials shall conform to the Construction Standards and Specifications of Roanoke County and/or the Virginia Department of Transportation.

The contractor or developer is required to notify the Roanoke County Engineering Division in writing at least three (3) days prior to any construction, including, but not limited to the following:

- A. Installation of approved erosion control devices
- B. Clearing and grubbing
- C. Subgrade excavation
- D. Installing storm sewers or culverts
- E. Setting curb and gutter forms
- F. Placing curb and gutter
- G. Placing other concrete
- H. Placing gravel base
- I. Placing any roadway surface
- J. Installing water lines
- K. Installing sanitary sewer lines

A pre-construction conference should be scheduled with the Roanoke County Engineering Division, to be held at least one (1) day prior to any construction.

Measures to control erosion and siltation must be provided prior to plan approval. Plan approval in no way relieves the developer or contractor of the responsibilities contained within the erosion and siltation control policies.

A permit must be obtained from the V.D.O.T. Residency Office, Roanoke County, prior to construction in the highway right-of-way.

Plan approval does not guarantee issuance of any permits by V.D.O.T.

An approved set of plans and all permits must be available at the construction site.

Field construction shall honor proposed drainage divides as shown on plans.

All unsuitable material shall be removed from the construction limits of the roadway before placing embankment.

Pavement sections on approved plans are based on a minimum CBR of 10. CBR tests are to be performed by the engineer and submitted to V.D.O.T. and to the Roanoke County Engineering Division prior to placement. CBR values < 10 will require revised pavement sections.

All roadside ditches or grades of more than 5 percent shall be paved with cement concrete to the limits as indicated on the plans and as required at the field inspection.

Location of guard rails shall be determined at a joint field inspection by the County and V.D.O.T.

All springs shall be capped and piped to the nearest storm sewer or natural watercourse. The pipe shall be 6 inch minimum diameter and conform to V.D.O.T. Standard SB-1.

Standard street and traffic control signs shall be erected at each intersection by the developer prior to final street acceptance.

Construction debris shall be containerized in accordance with the Virginia Litter Control Act. No less than one litter receptacle shall be provided on site.

The contractor shall provide adequate means of cleaning mud from trucks and/or other equipment prior to entering public streets. It is the contractors responsibility to insure that the streets are in a clean, mud and dust free condition at all times.

The developer and/or contractor shall supply all utility companies with copies of approved plans, advising them that all grading and installation shall conform to approved plans.

Contractors shall notify utilities of proposed construction at least two (2), but not more than ten (10) working days in advance. Area public utilities may be notified thru "Miss Utility": 1-800-552-7001.

The developer or contractor shall supply the county with correct As-Built plans before final acceptance.

All work shall be subject to inspection by Roanoke County and/or V.D.O.T. inspectors.

Field corrections shall be approved by the Roanoke County Engineering Division prior to such construction.

100 year floodway and floodplain information shall be shown where applicable.

Grade stakes shall be set for all curb and gutter, culver, sanitary sewer and storm sewer.

INDEX

- #1 COVER SHEET
- #2 ABBREVIATION & LEGEND
- #3 TRANSPORTATION NOTES
- #4 ROANOKE COUNTY EROSION CONTROL STANDARDS
- #5 EROSION & SEDIMENT CONTROL NARRATIVE
- #6 GRADING AND EROSION & SEDIMENT CONTROL PLAN
- #7 GRADING AND EROSION & SEDIMENT CONTROL PLAN
- #8 UTILITY PLAN
- #9 UTILITY PLAN
- #10 STREET & UTILITY PROFILE
- #11 STREET & UTILITY PROFILE
- #12 STORM SEWER PROFILE
- #13 WATER & SANITARY SEWER PROFILES
- #14 WATER & SANITARY SEWER PROFILES
- #15 SEDIMENT POND OUTLET DETAILS
- #16 ROANOKE COUNTY STANDARD SEWER DETAILS
- #17 ROANOKE COUNTY STANDARD WATER DETAILS

SEWER NOTES

A minimum cover of three (3) feet is required over proposed lines.

Contractor shall be responsible for locating and uncovering all manholes after paving. Manhole tops shall be adjusted to grade if necessary.

All existing utilities may not be shown or may not be shown in the exact location. The contractor shall comply with State Water Works Regulations, Section 12.05.03, where lines cross.

House connections are to be made with 4" pipe installed at a minimum grade of 1/4 inch to 1 foot in R/W.

Laterals from manholes shall be PVC or Ductile Iron of sufficient length to provide two (2) feet of bearing on natural ground. The transition from ductile iron to asbestos cement or concrete pipe shall be made with an adapter coupling in R/W.

All trenches in existing or future rights-of-way shall be compacted according to V.D.O.T. standards.

Lines shall be staked prior to construction.

WATER NOTES

A minimum cover of three (3) feet is required over proposed lines.

Contractor shall be responsible for locating and uncovering valve vaults after paving and adjustment to final grade if necessary.

All existing utilities may not be shown or may not be shown in the exact location. The contractor shall comply with the State Water Works Regulations, Section 12.05.03, where lines cross.

All trenches in existing or future highway right-of-ways shall be compacted according to V.D.O.T. standards.

Lines shall be staked prior to construction.

Water main shall be minimum Class 52 Ductile Iron in accordance to AWWA C151 or DR-14 PVC in accordance with AWWA C-900.

Availability number TOWN OF VINTON WILL PROVIDE LETTER

"I, \_\_\_\_\_, identify \_\_\_\_\_ as the individual in charge of and responsible for land disturbing activities associated with this erosion and sediment control plan. I agree to notify the Roanoke County in writing should I transfer this responsibility to another certified individual before the completion of this project and the release of the erosion and sediment control bond."

Certification Number \_\_\_\_\_ Date \_\_\_\_\_

SURVEY INFORMATION


Horizontal and vertical control surveys were performed in (year) MARCH, 2001 by L.M.W. P.C.

All elevations must be referenced to the National Geodetic Vertical Datum of 1929.


Source of topographic mapping is FIELD SURVEY dated MARCH, 2001

Boundary was performed by L.M.W. P.C. dated MARCH, 2001

The professional seal and signature below certifies the boundary survey and topographic mapping to be accurate and correct.

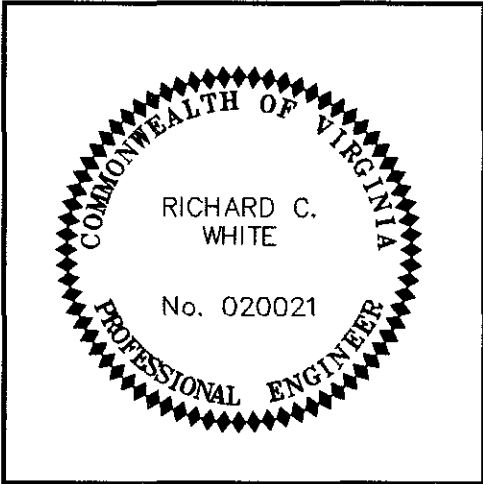

PROFESSIONAL ENGINEER  
SEAL AND SIGNATURE

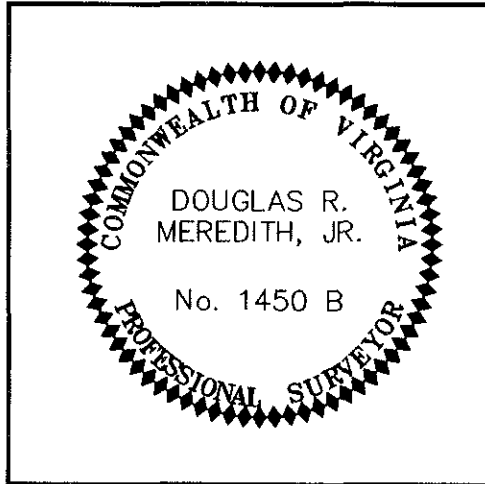

PROFESSIONAL SURVEYOR  
SEAL AND SIGNATURE

COUNTY OF ROANOKE

NAME OF DEVELOPMENT	KINGSTON ESTATES	I, _____ OWNER/DEVELOPER, AM AWARE OF THE SITE DESIGN REQUIREMENTS IMPOSED BY THIS SITE DEVELOPMENT PLAN AND OTHER APP-LICABLE COUNTY CODES. I HEREBY CERTIFY THAT I AGREE TO COMPLY WITH THESE REQUIREMENTS, UNLESS MODIFIED IN ACCORDANCE WITH LOCAL LAW.
MAGISTERIAL DISTRICT(S)	VINTON MAGISTERIAL DISTRICT	
OWNER (name, address, telephone)	JOHN GRIFFIN 2845 PLANTATION DR. FINCASTLE, VA 24090	PHONE: 977-1901
DEVELOPER (name, address, telephone)	JOHN GRIFFIN 2845 PLANTATION DR. FINCASTLE, VA 24090	PHONE: 977-1901
ENGINEER, ARCHITECT OR SURVEYOR (name, address, telephone)	L.M.W., P.C. 102 ALBEMARLE AVE. ROANOKE, VA 24013	PHONE: (540) 345-0675 FAX: (540) 342-4456
TAX MAP NO(S)	61.02-1-14	BLOCK NO(S) _____ PARCEL NO(S) _____