

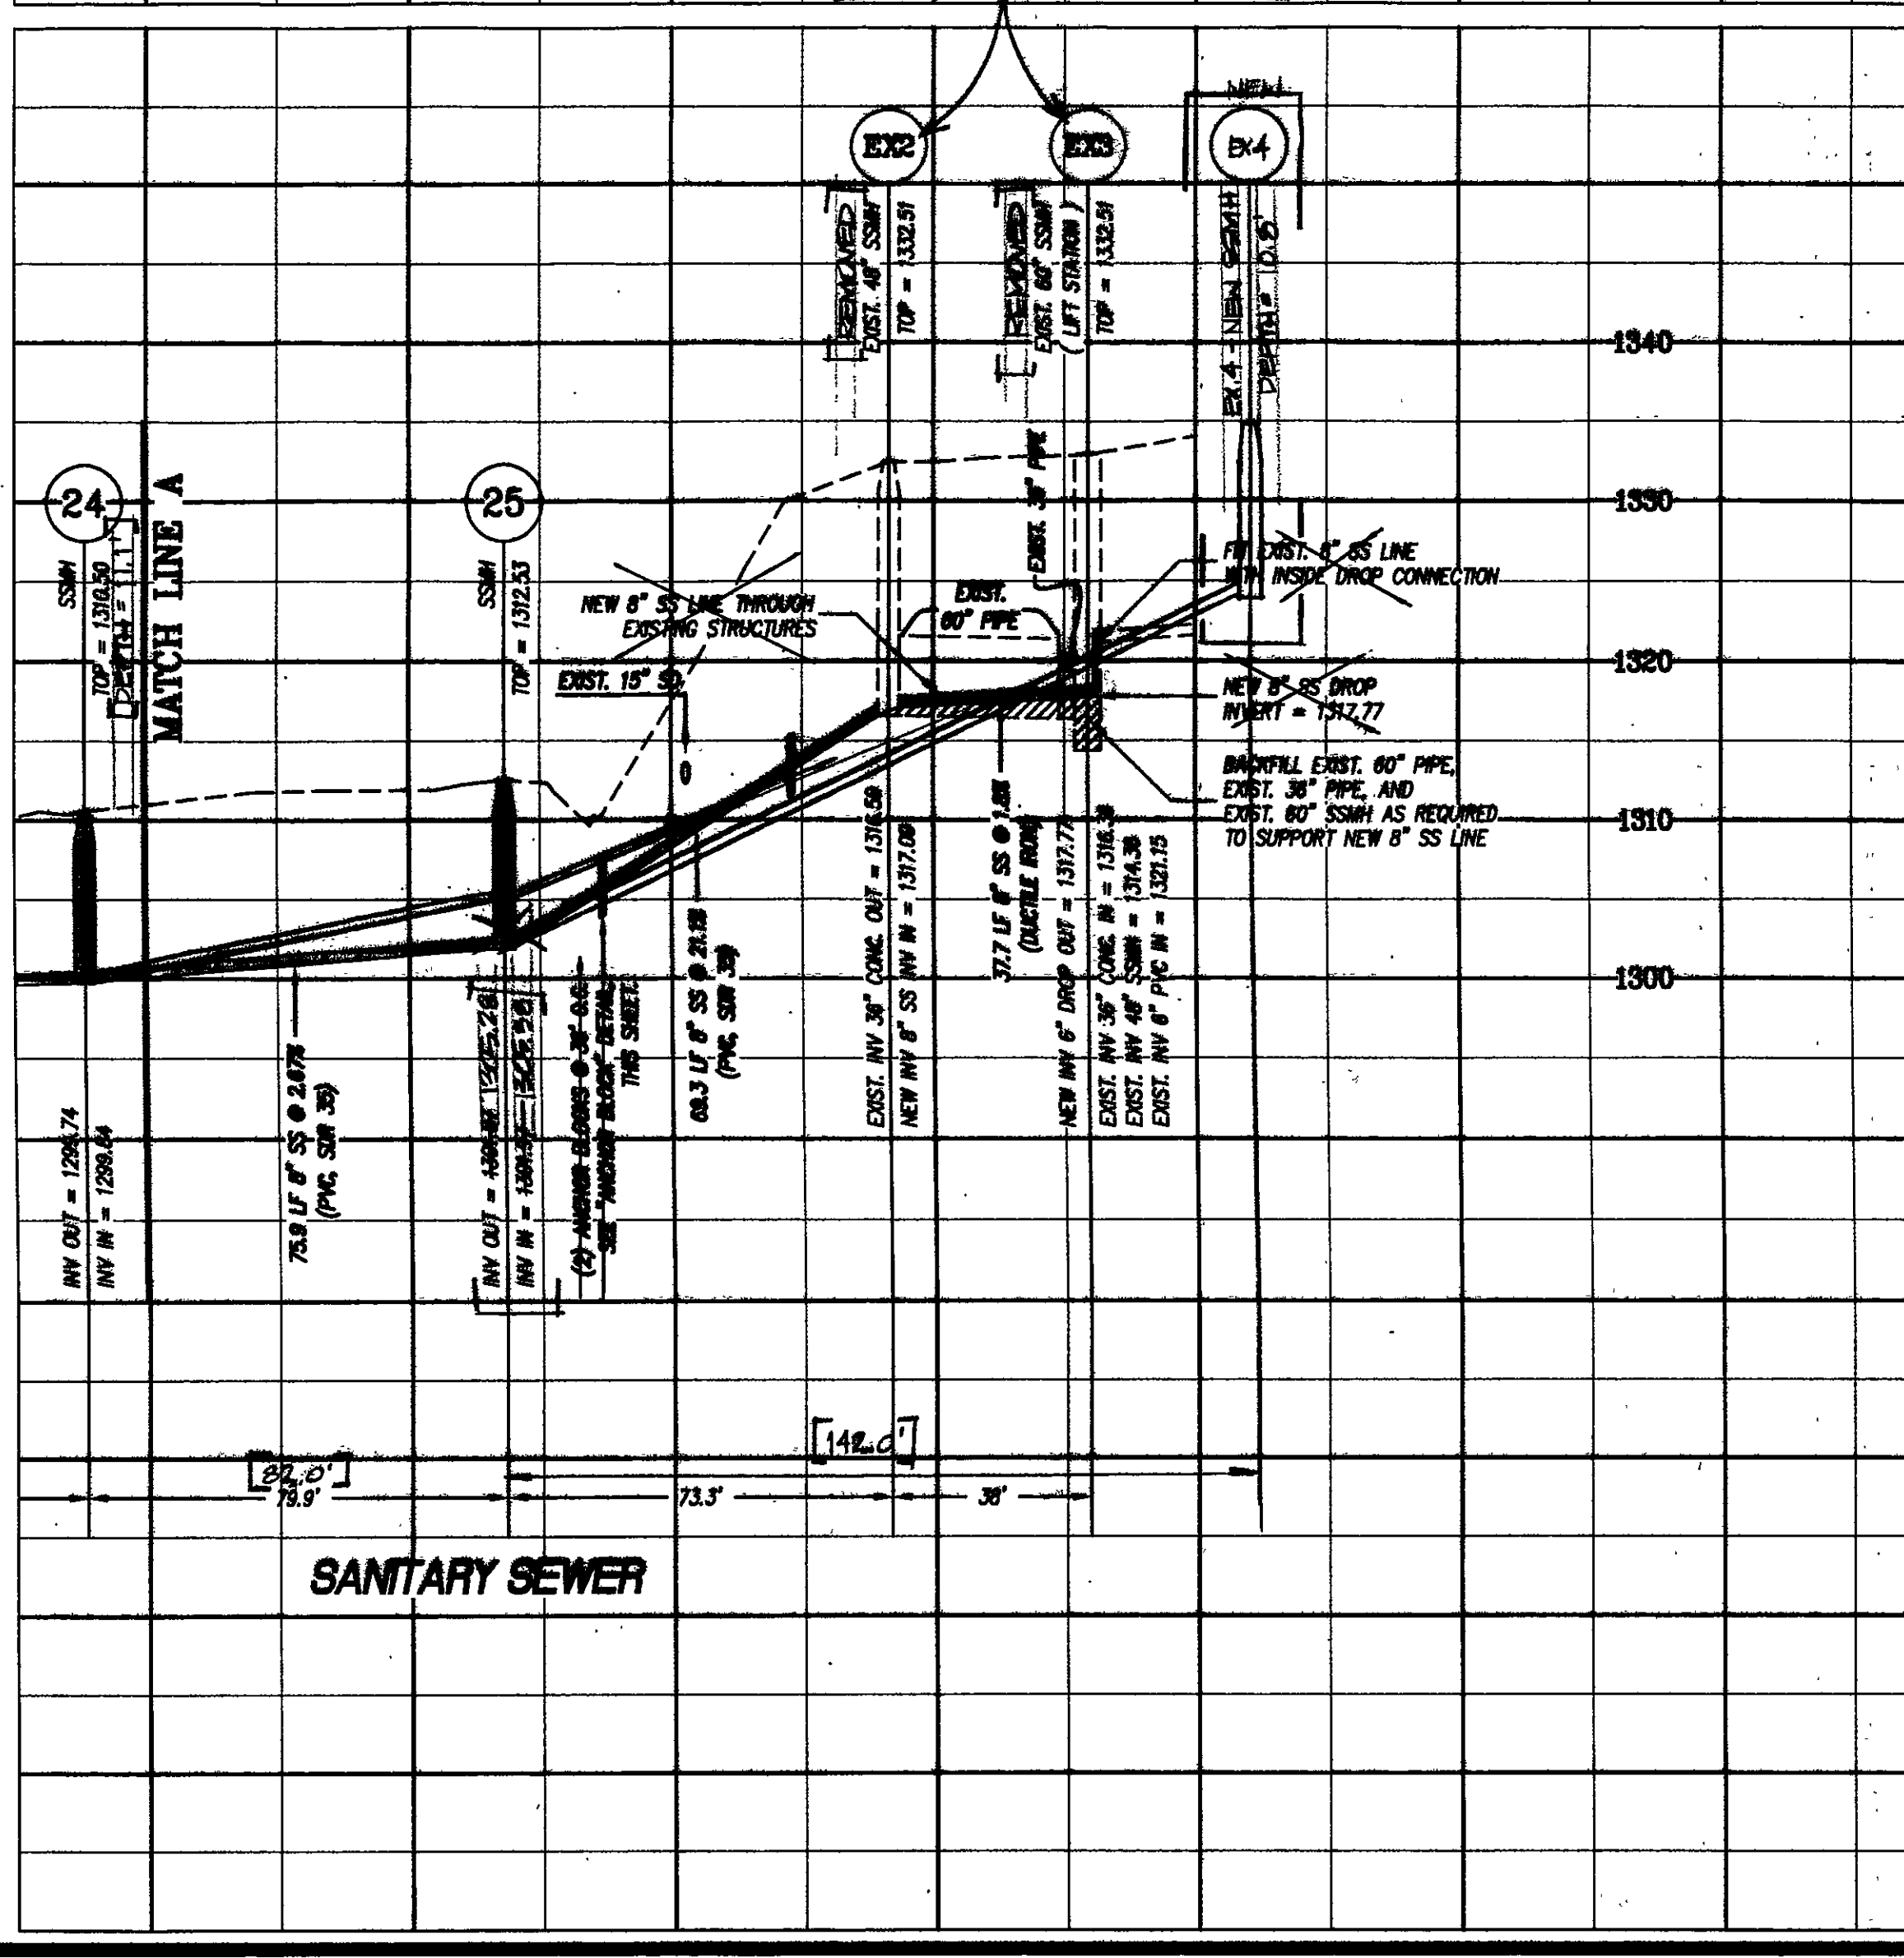
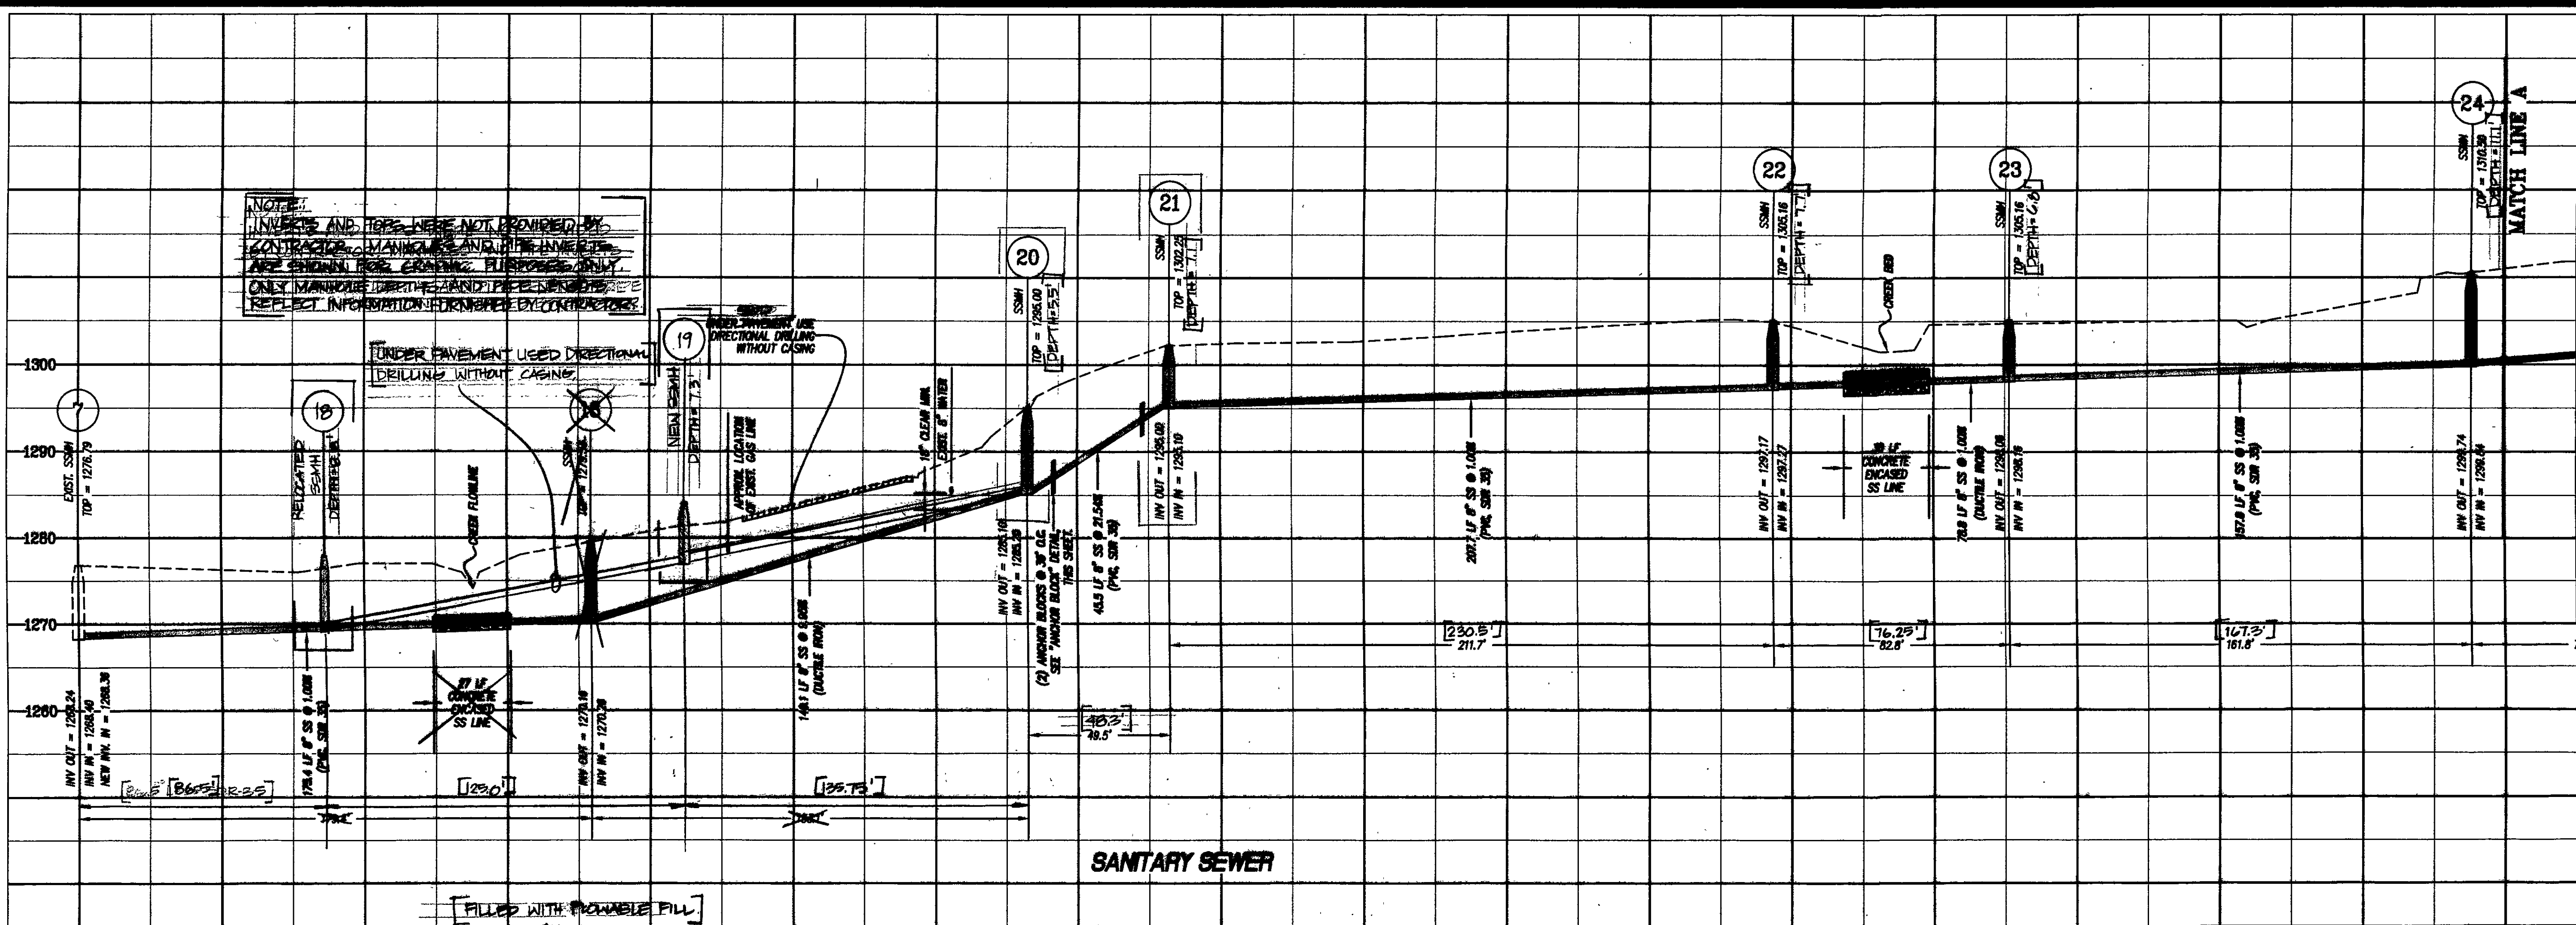
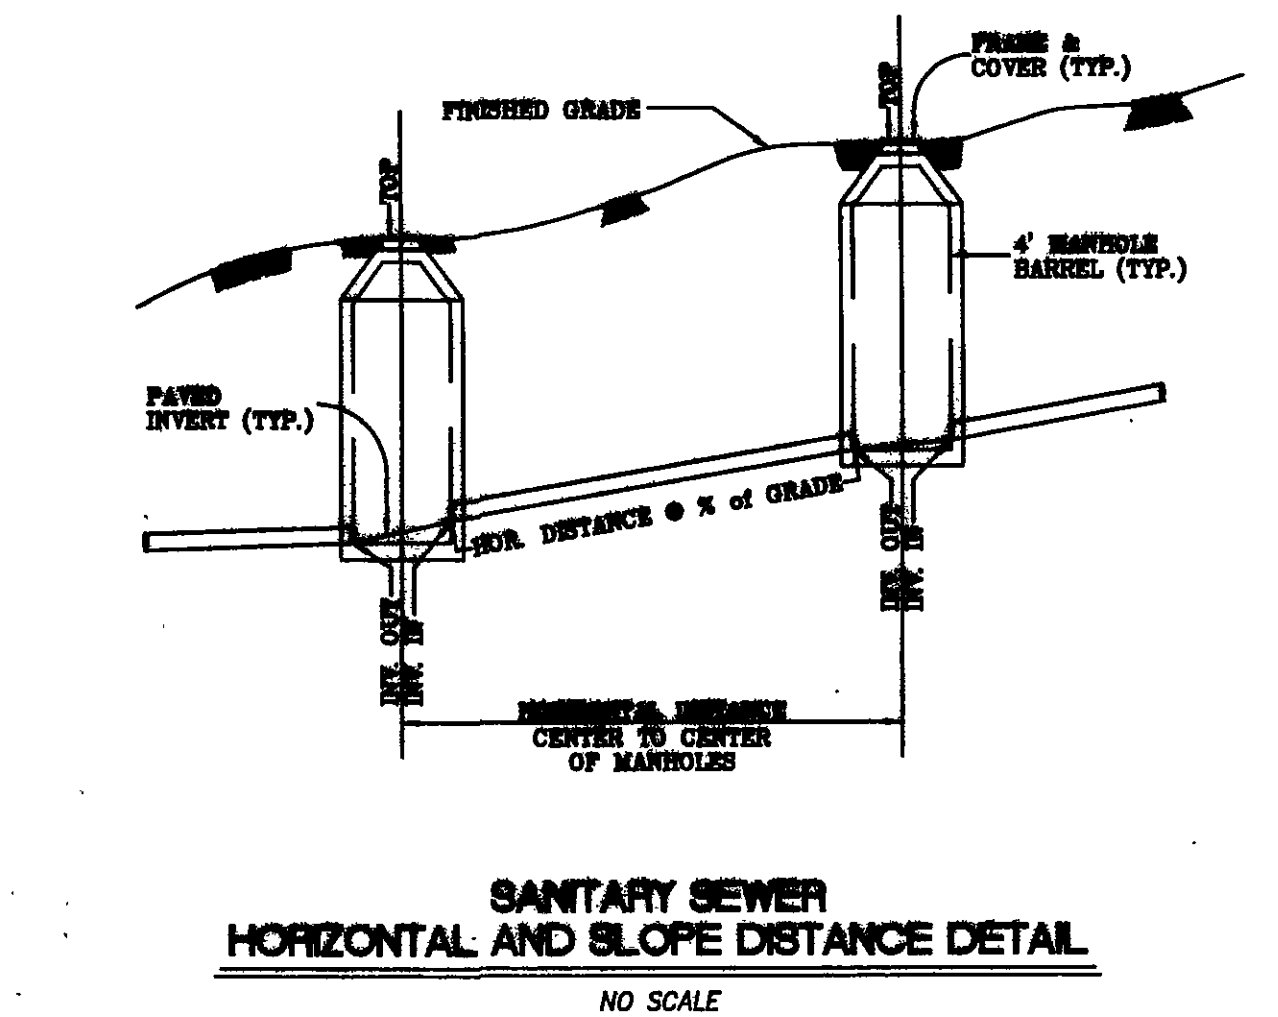


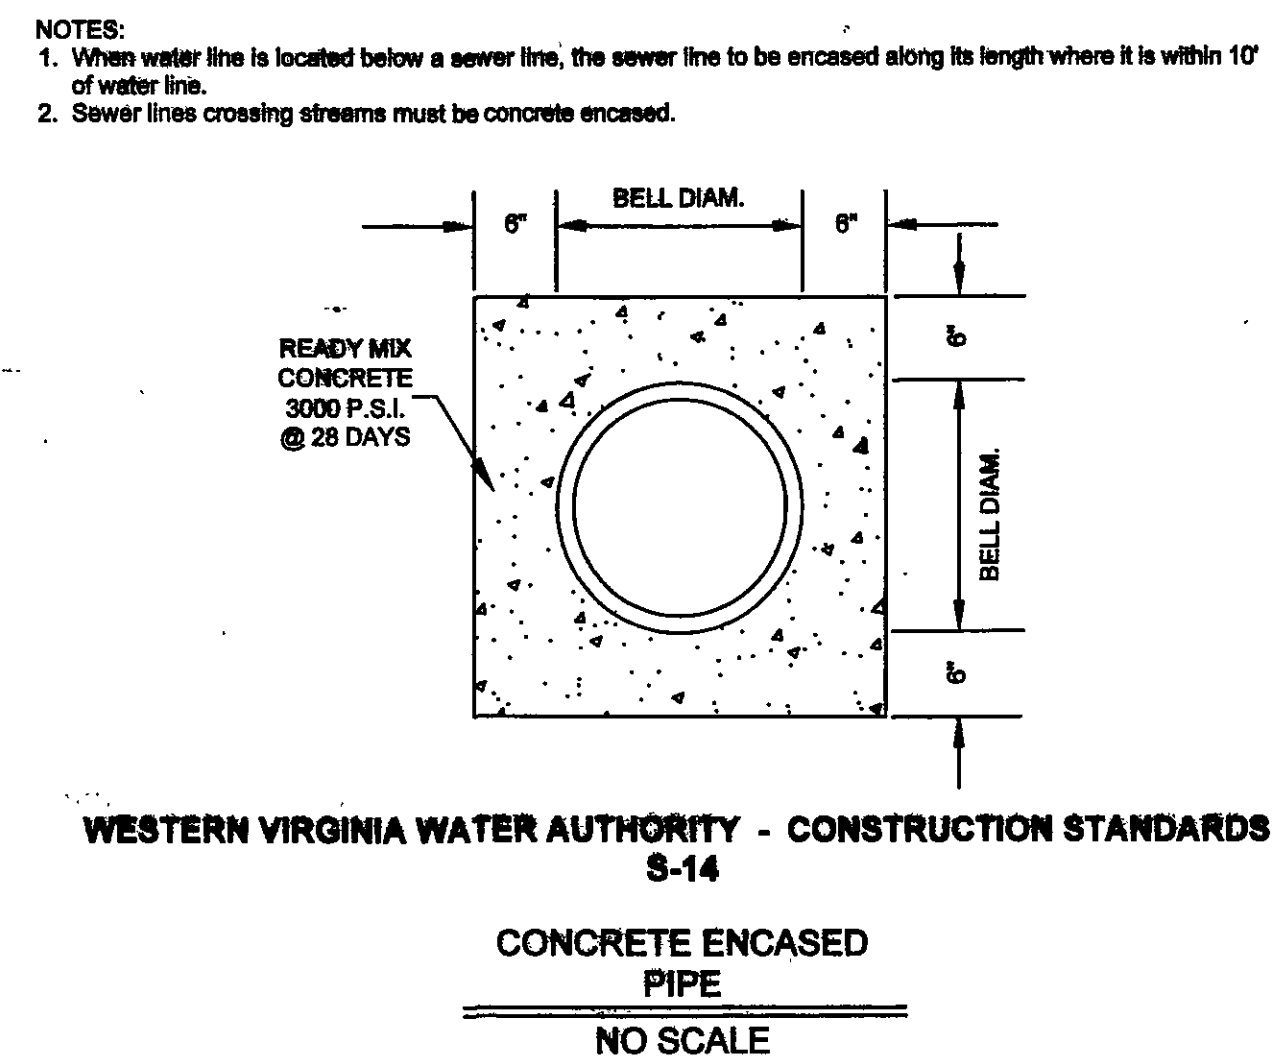

- NOTES:**
1. ALL SANITARY SEWER LINES TO HAVE A MINIMUM OF 3.0 FEET OF COVER.
 2. MAINTAIN A MINIMUM OF 18" CLEARANCE FROM OUTSIDE OF PIPE TO OUTSIDE OF PIPE AT ALL WATER, SANITARY SEWER, AND STORM DRAIN CROSSINGS.
 3. A WESTERN VIRGINIA WATER AUTHORITY INSPECTOR MUST BE ON SITE DURING INSTALLATION OF NEW MANHOLES AT, OR CONNECTIONS TO, THE IN AT EXISTING SANITARY SEWER LINES.
 4. SANITARY SEWER LINE SHALL BE PVC, SDR-35 UNLESS OTHERWISE NOTED.
 5. SANITARY SEWER CONNECTION TO EXISTING MANHOLES(S) SHALL BE EXCAVATED BY THE CONTRACTOR AND CONTINGENCED FOR TAPPING. TAP TO BE PERFORMED BY THE WESTERN VIRGINIA WATER AUTHORITY AT THE CONTRACTOR'S EXPENSE.
 6. WHERE SANITARY SEWER DEPTH EXCEEDS 12 FT. EXTRA STRENGTH SDR 21 OR SDR 26 PIPE SHALL BE USED.
 7. CONTRACTOR SHALL PROVIDE BYPASS PUMPING TO ENSURE EXISTING SANITARY SEWER SERVICE IS MAINTAINED DURING CONSTRUCTION.

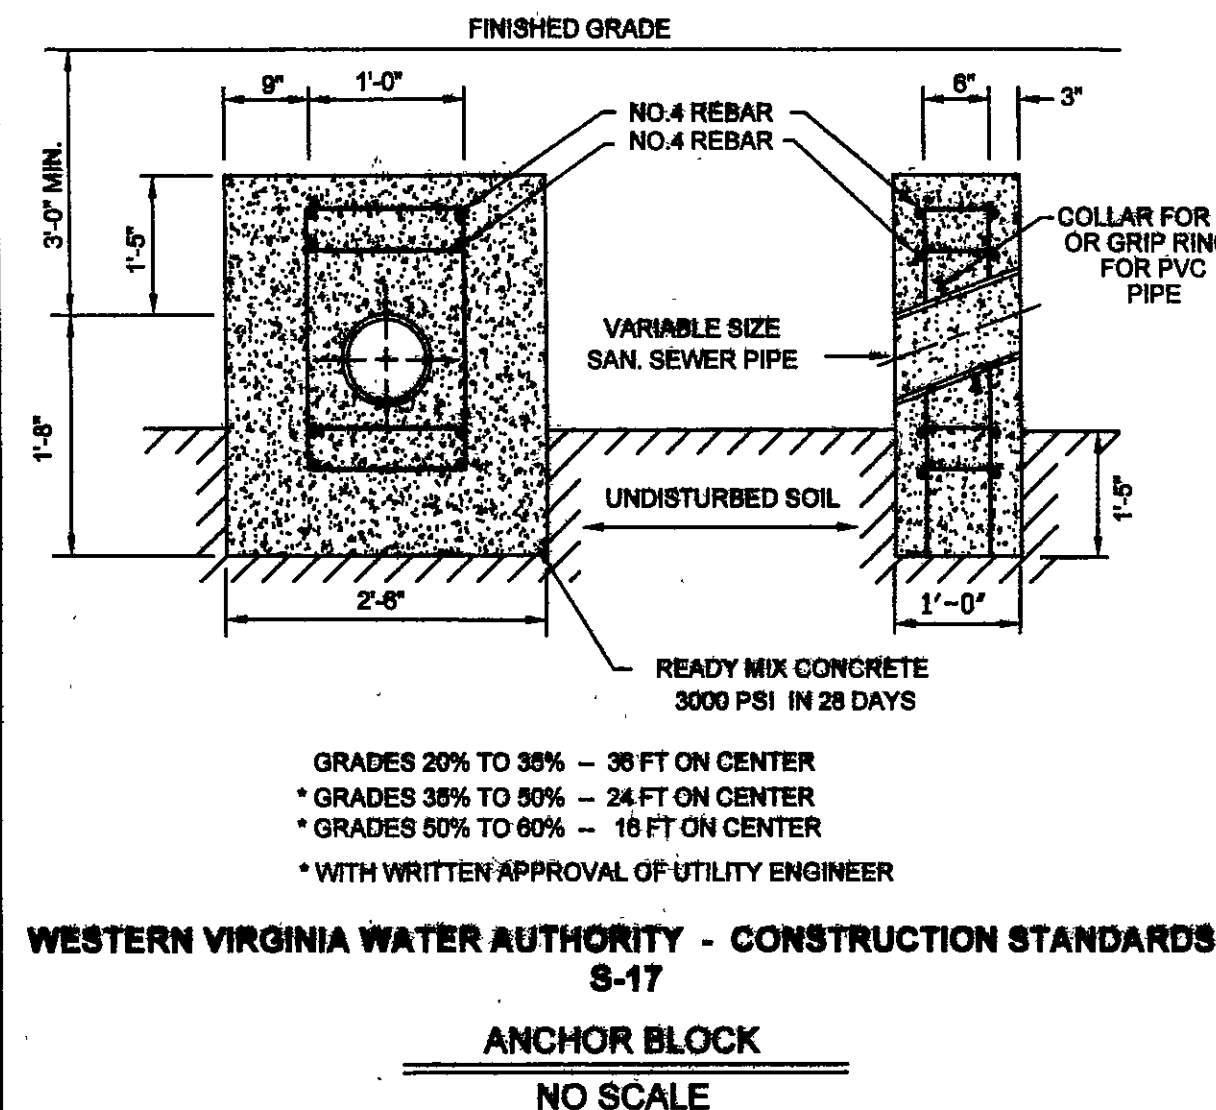

LUMSDEN ASSOCIATES, P.C.
ENGINEERS-SURVEYORS-PLANNERS
ROANOKE, VIRGINIA

4664 BRAMBLETON AVENUE
P.O. BOX 20669
ROANOKE, VIRGINIA 24018

PHONE: (540) 774-4411
FAX: (540) 772-9445
E-MAIL: MAIL@LUMSDENPC.COM

COMMONWEALTH OF VIRGINIA
THOMAS C. DALE
No. 033002
10/1/06

PROFILE AND DETAILS

**CANTERBURY PARK SEWER LIFT
STATION REMOVAL PROJECT**
PREPARED FOR
WESTERN VIRGINIA WATER AUTHORITY
CAVE SPRING MAGISTERIAL DISTRICT
ROANOKE COUNTY, VIRGINIA

NO.	DATE	DESCRIPTION
1	10/27/06	REVISED SSM AND P&R GRADES
2		PER WESTERN VIRGINIA WATER AUTH.
3	11/21/06	SEWER "A" SUBJECTS
4		
5		

DATE: September 29, 2006
SCALE: SCALE 1" = 30'
COMMISSION NO.: 2005-203
SHEET 5 OF 6