



PLAN	SURVEYED	BY	DATE
	NOTE BOOK	NO.	

PROFILE	SURVEYED	BY	DATE
	NOTE BOOK	NO.	

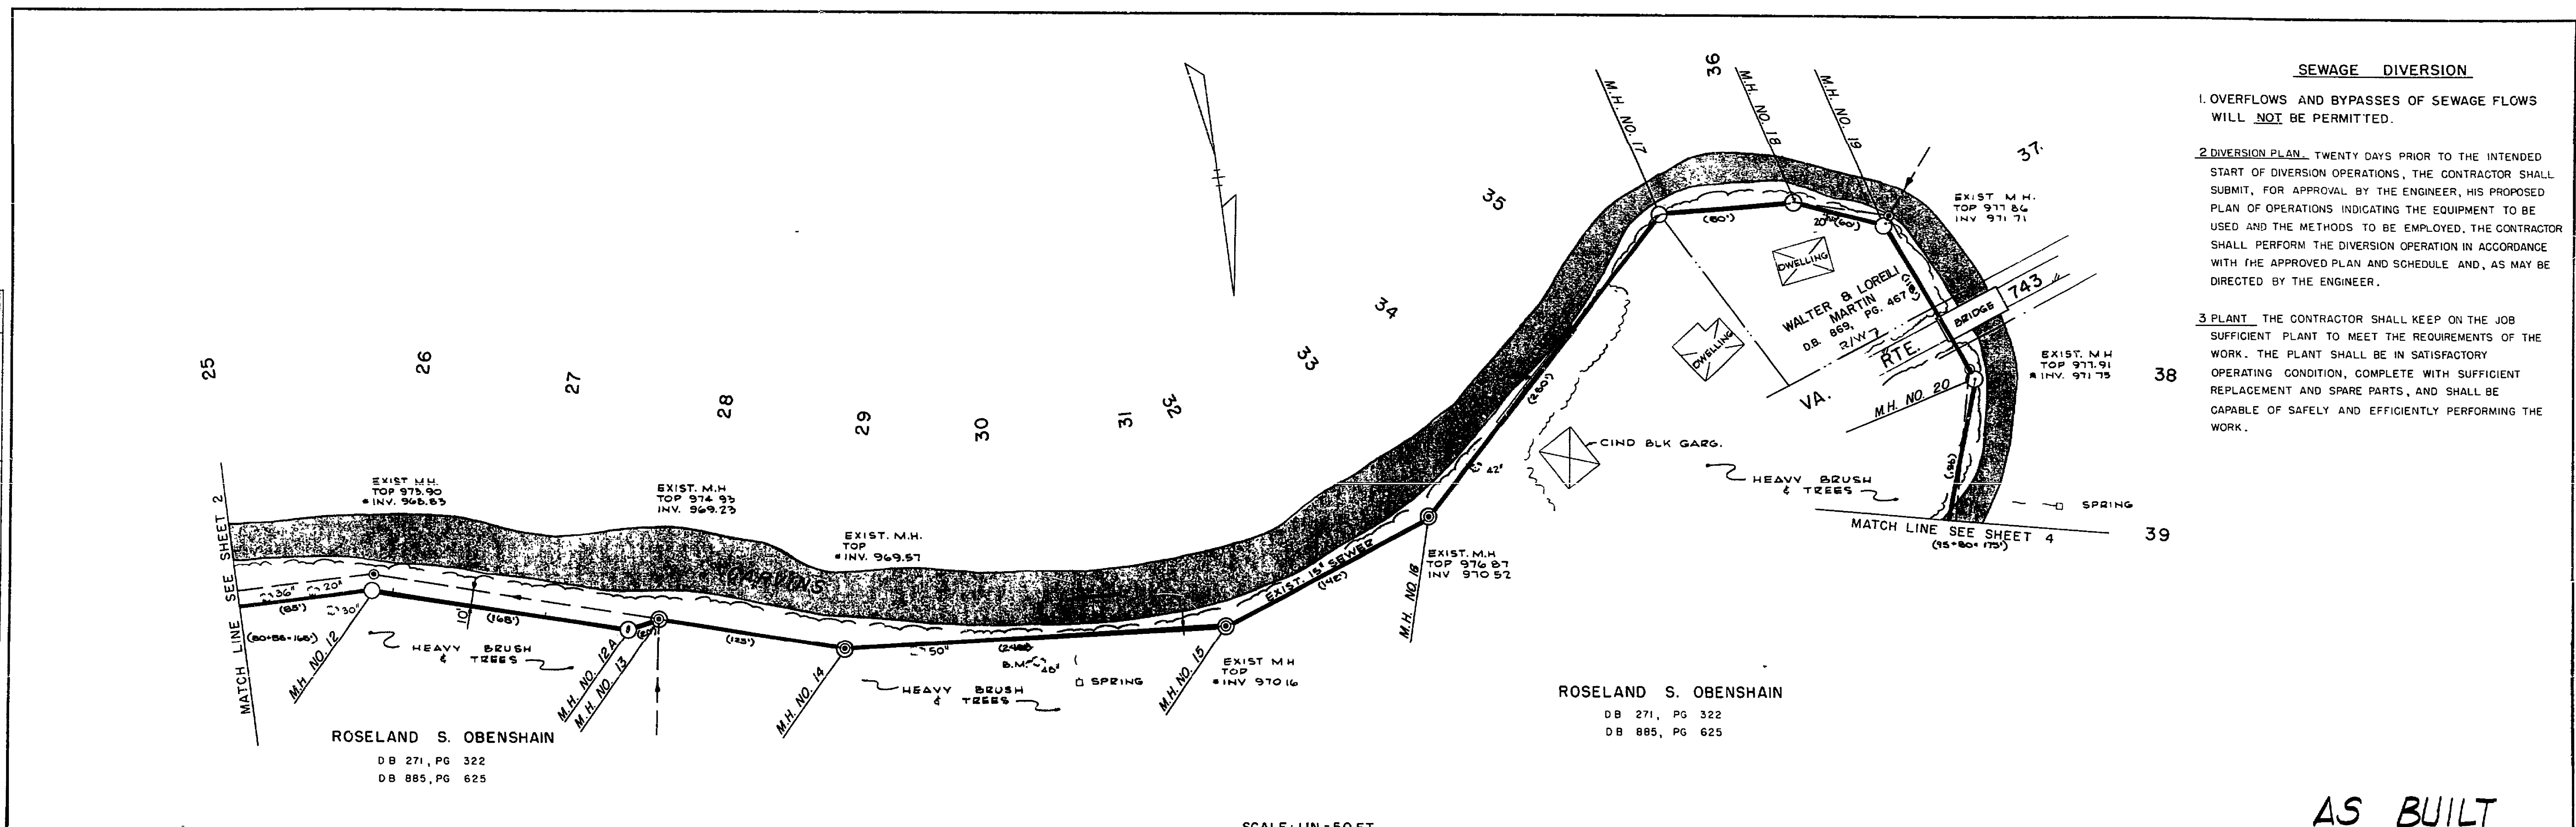

- SEWAGE DIVERSION**
- OVERFLOWS AND BYPASSES OF SEWAGE FLOWS WILL NOT BE PERMITTED.
 - DIVERSION PLAN.** TWENTY DAYS PRIOR TO THE INTENDED START OF DIVERSION OPERATIONS, THE CONTRACTOR SHALL SUBMIT, FOR APPROVAL BY THE ENGINEER, HIS PROPOSED PLAN OF OPERATIONS INDICATING THE EQUIPMENT TO BE USED AND THE METHODS TO BE EMPLOYED. THE CONTRACTOR SHALL PERFORM THE DIVERSION OPERATION IN ACCORDANCE WITH THE APPROVED PLAN AND SCHEDULE AND, AS MAY BE DIRECTED BY THE ENGINEER.
 - PLANT.** THE CONTRACTOR SHALL KEEP ON THE JOB SUFFICIENT PLANT TO MEET THE REQUIREMENTS OF THE WORK. THE PLANT SHALL BE IN SATISFACTORY OPERATING CONDITION, COMPLETE WITH SUFFICIENT REPLACEMENT AND SPARE PARTS, AND SHALL BE CAPABLE OF SAFELY AND EFFICIENTLY PERFORMING THE WORK.

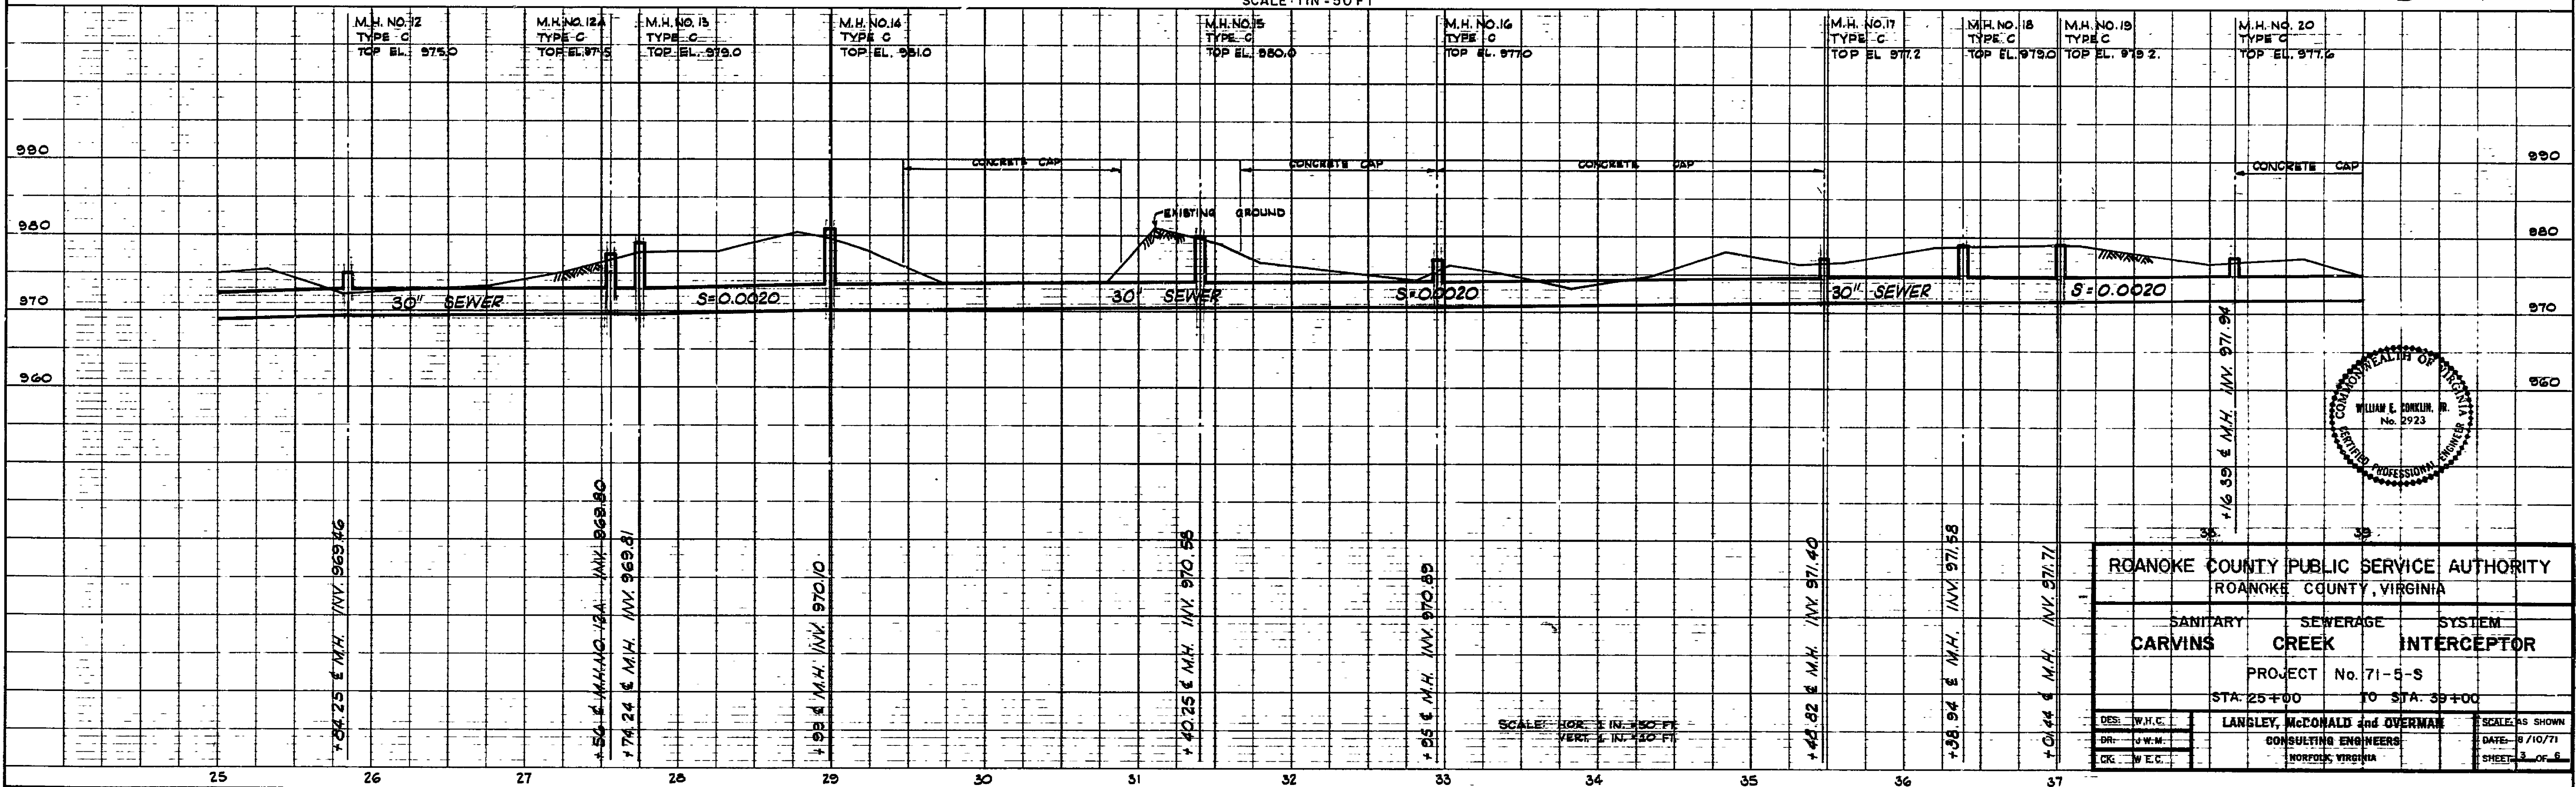

48 7008 MADE IN U.S.A.

SI-0315