




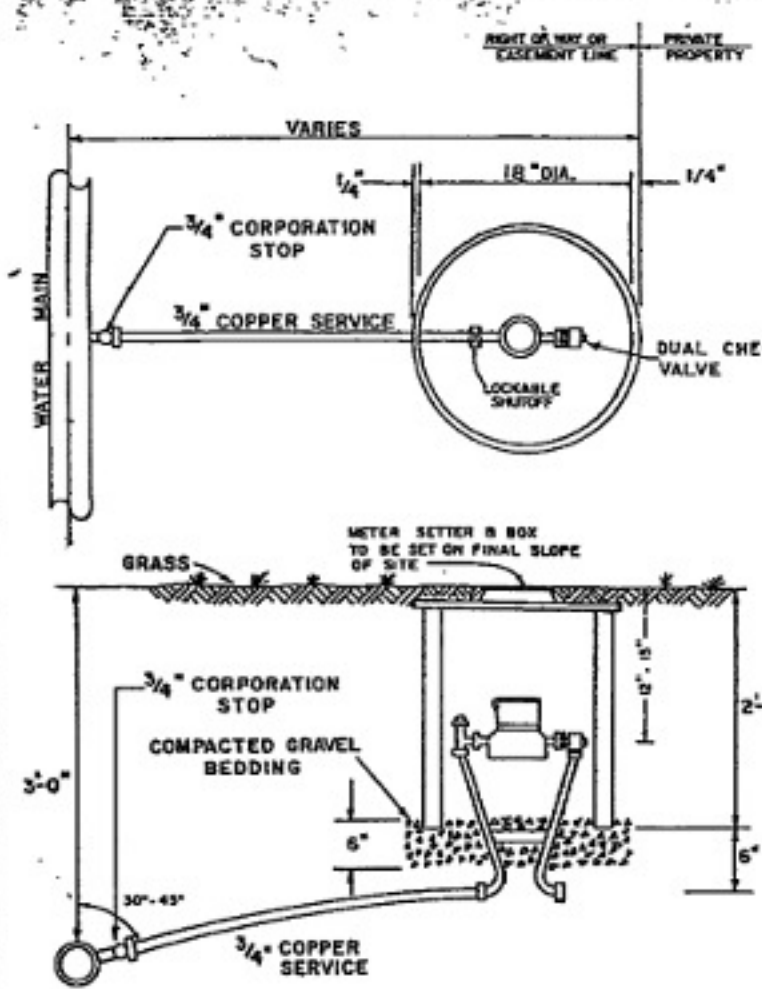


SINGLE RESIDENTIAL WATER SERVICE

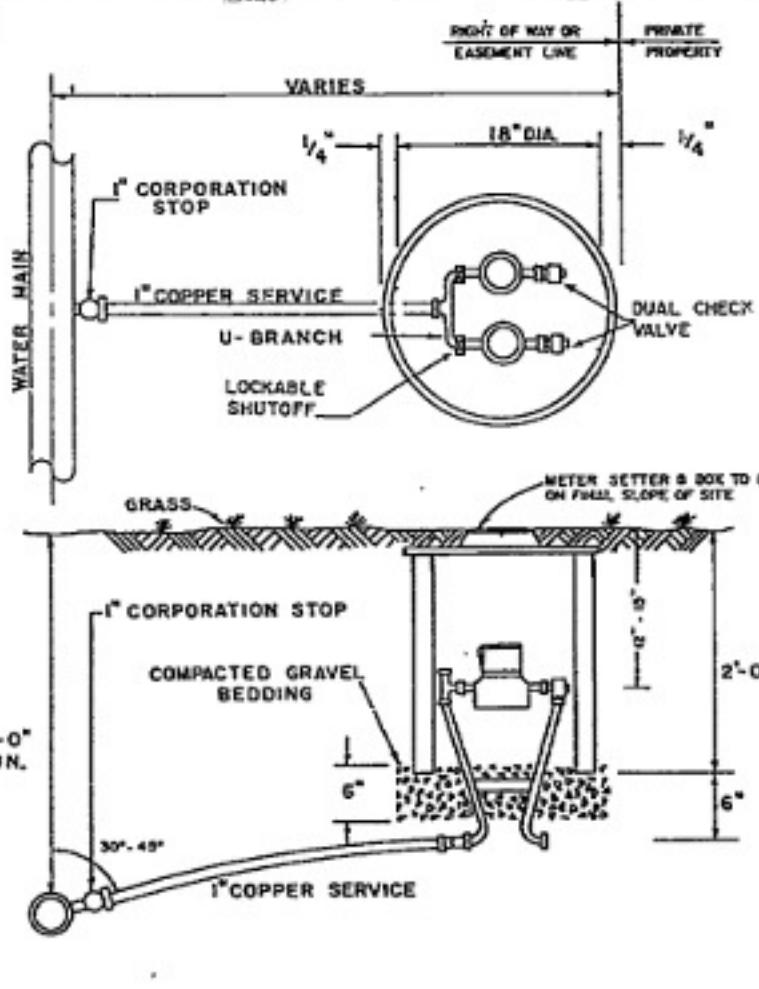


DOUBLE RESIDENTIAL WATER SERVICE

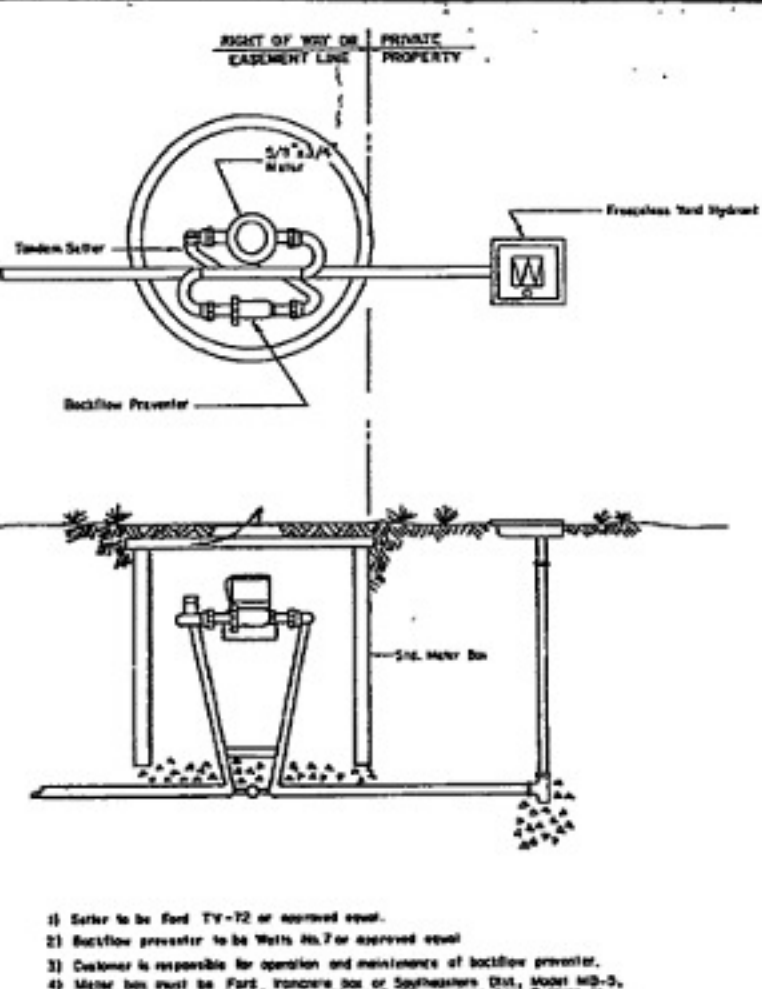


TYPICAL SPRINKLER SERVICE

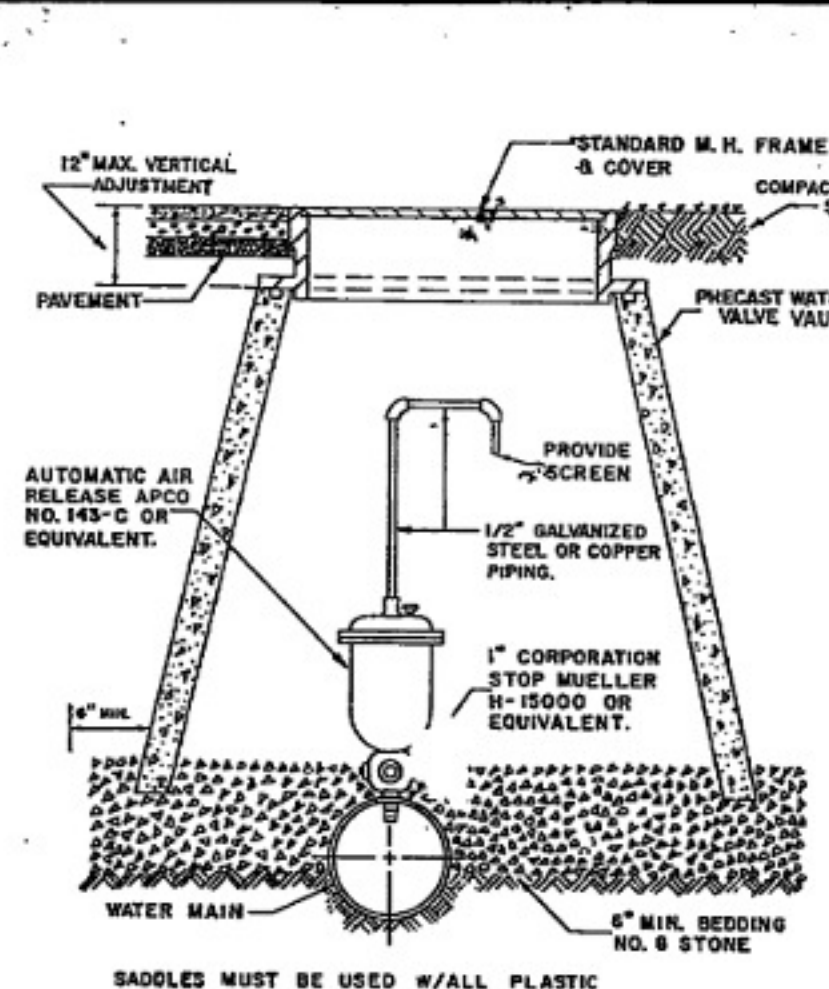


AUTOMATIC AIR RELEASE ASSEMBLY

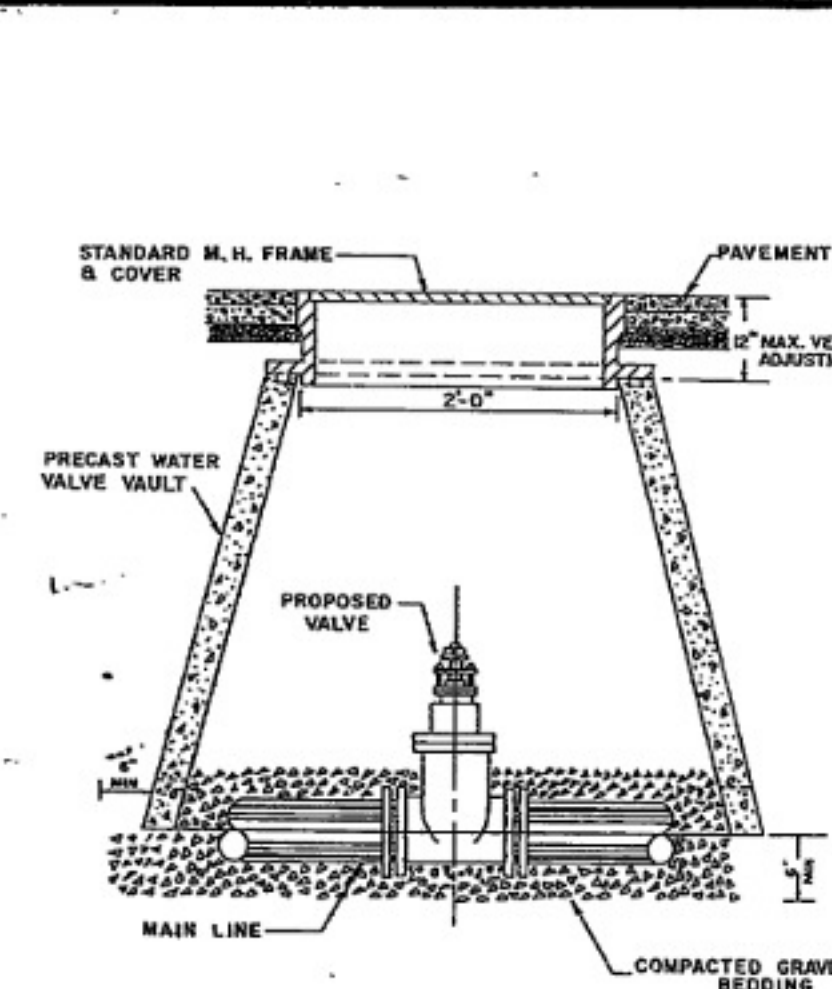


WATER LINE VALVE INSTALLATION

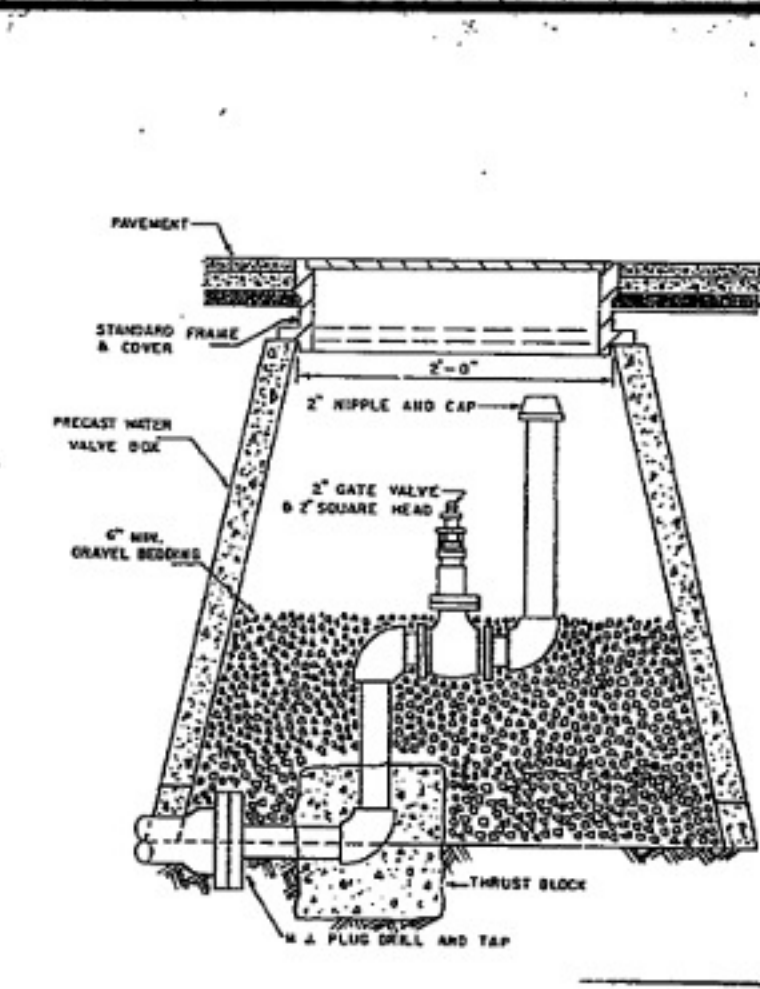


PERMANENT END OF LINE




THRUST BLOCK FOR HORIZONTAL & LOWER VERTICAL BENDS




ALTERNATE VALVE VAULT (MANHOLE)




FIRE HYDRANT SETTING




MANHOLE FRAME AND COVER




BLOW OFF ASSEMBLY FOR MAIN LINE TEMPORARY TERMINATION

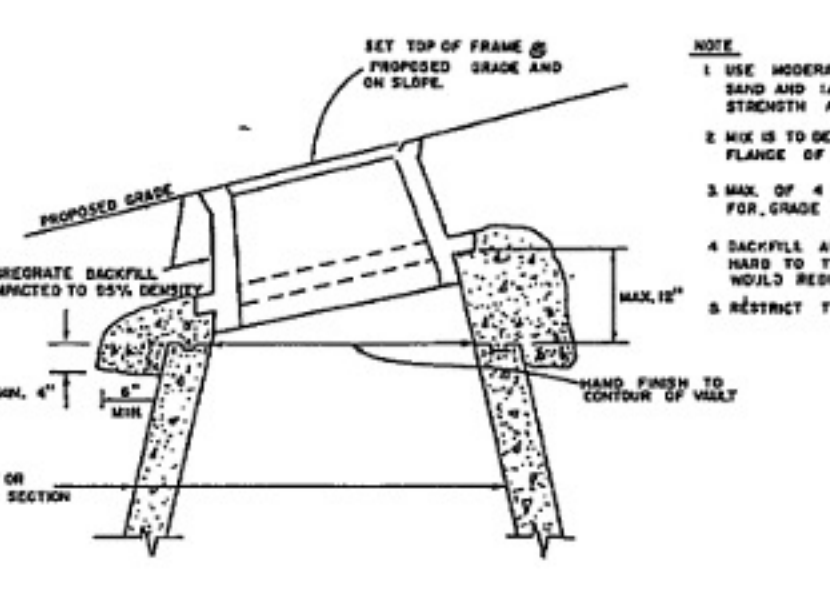

MANHOLE FRAME & COVER ADJUSTMENT



TYPICAL WATER PRESSURE TEST RIG

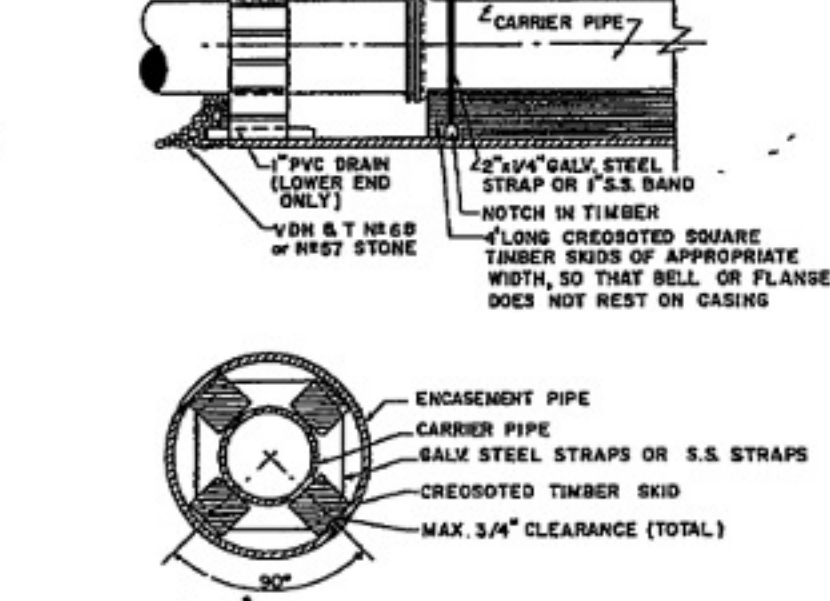

PIPE SUPPORT IN CASING PIPE

VAULT & WATER STANDARDS FOR CONSTRUCTION

1. Vault, manhole bases, risers, tapers and grade rings shall be precast reinforced concrete manufactured in accordance to Virginia Department of Transportation, Road and Bridge Specifications, Section 303.
2. Manhole base and riser sections construction shall be vertical with maximum 1" in 4' tilt.
3. A maximum of 2 construction grade rings or maximum of 1' of grade rings and frame and cover adjustment are allowable.
4. Final adjustment of frame and cover shall be in accordance to frame and cover adjustment detail using non shrink concrete with maximum of 4 bricks or concrete blocks for grade control. Frame and cover are to be set at finish grade or 1/4" above finish grade in pavement and yard areas and minimum 4" above finish grade in other areas. Manhole frame and covers are not to be set in drainage swale, valley gutter, etc.
5. Joints and openings in manhole walls shall be made watertight by using butyl sealants, "O" ring gaskets or mastic. The concrete surface shall be cleaned prior to use of sealant.
6. Frame and Covers
 - a) Doney Brothers Inc. MH - RCR - 56.
 - b) Approved equal.
7. All lift holes, openings around pipe, etc. shall be filled from inside and outside to thickness of structure.
8. All units used in manhole and vault construction shall be securely connected by interlocking between units, concrete collars or other approved methods.
9. Area around meter box at a radius of 4' to be on finish grade and unobstructed except for road construction.

APPROVED MATERIALS

1. Meter Boxes
 - a) Ford Ironcrete meter box with No. 2 Ironcrete top or approved equal.
 - b) Southeastern Distributor Model MB-5 Plastic box with Word or Charlotte Model C-12 cast iron base and cover (Not approved for roadway area).
 - c) Approved equal.
2. Water Sectors (including inlet riser valve and double check valve on outlet)
 - a) Ford VSM 72-15-WD
 - b) Approved equal.
3. Water Sector Extender or Riser
 - a) Not allowed unless approved by the Utility Director.
4. Corporation Stop
 - a) Mueller Model H-1500.
 - b) Ford Model P-601.
 - c) Approved equal.
5. C-Branch
 - a) Ford Model U28-13.
 - b) Mueller Model B 2262.
 - c) Approved equal.
6. Service Saddles (for PVC Pipe)
 - a) Ford Model VS 203 and PC 122 with stainless steel band and bolts.
 - b) Approved equal.

ENGINEERING DEPARTMENT
AND
UTILITY DEPARTMENT

1		3/16/88
NO.	REVISIONS	DATE

WATER DETAILS

DATE: 03-16-88
SCALE: NOT TO SCALE
DRAWING BY: A.F.
DESIGNED BY: PTH
APPROVED BY: *Reardon*

SHEET
OF

RC-1313