# GENERAL NOTES

### PRE-CONSTRUCTION MEETING AND CONSTRUCTION COMMENCEMENT:

- 1. All construction methods and materials shall conform to the Construction Standards and Specifications of Roanoke County, the Western Virginia Water Authority, and the Virginia Department of Transportation.
- 2. Stormwater Management Agreements with an attached 8 1/2" x 11" or 8 1/2" x 14" plat must be approved and recorded prior to the pre-construction meeting.
- 3. Once all required items are submitted to Roanoke County, the developer must contact the Development Review Coordinator to indicate that a pre-construction meeting needs to be scheduled. The pre-construction meeting will be scheduled with the owner/developer two (2)
- 4. All land disturbing projects that require approval of an erosion and sediment control plan, grading or clearing permit shall require that the applicant provide the name of an individual who will be responsible for land disturbing activities and that this individual hold a Responsible Land Disturber (RLD) Certificate from the Department of Environmental Quality. The Responsible Land Disturber can be anyone from the Project team that is certified by the Commonwealth of Virginia to be in charge of carrying out the land disturbing activity for the project.
- 5. It is the responsibility of the owner/developer to notify the certified Responsible Land Disturber and the Utility Contractor to attend the pre-construction meeting.
- 6. The Development Review Coordinator will schedule the pre-construction meeting with the County Review Engineer, the County Inspector, and the Western Virginia Water Authority and the Town of Vinton Public Works Department if applicable.
- 7. An approved set of plans, Storm Water Pollution Prevention Plan (SWPPP), VSMP coverage letter, and all permits must be available at the construction site at all times.
- 8. The developer and/or contractor shall supply all utility companies with copies of approved plans, advising them that all grading and installation shall conform to approved plans.
- 9. The project engineer will inform the owner/developer verbally and in writing of the County's obligation to perform inspections on site. Everyone in the meeting will be required to sign a pre-construction checklist indicating their knowledge of Roanoke County's obligation to perform
- 10. The Erosion Control Permit or Combined Erosion Control & VSMP Permit is given to the developer at this pre-construction meeting.
- 11. Notify Roanoke County prior to beginning installation of ESC measures. The County will inspect initial installations to ensure compliance with approved plan prior to start of grading. The developer SHALL contact the project inspector 24 hours before beginning any grading or construction on the property.
- 12. County inspectors must inspect storm drain / stormwater management / BMP installations during the process of installation. Please contact the site inspector 24 hours in advance.
- 13. All work shall be subject to inspection by Roanoke County, the Western Virginia Water Authority and the Virginia Department of Transportation Inspectors.
- 14. Contractors shall notify utilities of proposed construction at least two (2), but not more than ten (10) working days in advance. Area public utilities may be notified thru "Miss Utility": 1-800-552-7001 or VA 811.
- 15. The 100 year Floodway shall be staked prior to any construction.
- 16. Grade stakes shall be set for all curb and gutter, culvert, sanitary sewer and storm sewer at all
- 17. Roanoke County shall be notified when a spring is encountered during construction.
- 18. Construction debris shall be containerized in accordance with the Virginia Litter Control Act. No less than one litter receptacle shall be provided on site.
- 19. The contractor shall provide adequate means of cleaning mud from trucks and/or other equipment prior to entering public streets or rights of ways. It is the contractors responsibility to insure that the streets are in a clean, mud and dust free condition at all times.
- 20. Plan approval in no way relieves the developer or contractors of the responsibilities contained
- within the erosion and sediment control or stormwater management policies. 21. Field construction shall honor proposed drainage divides as shown on plans.
- 22. Field corrections shall be approved by the Roanoke County and/or the Western Virginia Water Authority and the Professional of Record, prior to such construction.
- 23. The developer or contractor shall supply the County and the Western Virginia Water Authority with correct As-Built plans before final acceptance.

## VIRGINIA DEPARTMENT OF TRANSPORTATION:

- 1. Plan approval by Roanoke County does not guarantee issuance of any permits by the Virginia Department of Transportation.
- 2. A permit must be obtained from the Virginia Department of Transportation, Salem Residency Office prior to construction in the highway right-of-way.
- 3. The preliminary pavement designs should be based on a predicted sub-grade CBR value of 7.0 and with a Resiliency Factor (RF) of 2.0 as shown in the current edition of the Virginia Department of Transportation Pavement Design Guide for Subdivision and Secondary Roads. The sub-grade soil is to be tested by an independent laboratory and the results submitted to the Virginia Department of Transportation prior to base construction. Should the sub-grade CBR value and/or the RF value be less than the predicted values, additional base material will be required in accordance with Departmental specifications. Refer to the same manual as the number and locations of the required soil samples to be tested. All pavement designs shall be submitted to the Department for review and approval. The sub-grade shall be approved by the Virginia Department of Transportation prior to placement of the base. Base shall be approved by the Virginia Department of Transportation for depth, template, and compaction before the surface is applied.
- Standard guardrail with safety end sections may be required on fills or in areas where hazards exist as deemed necessary. After completion of rough grading operations, the County Engineer and Virginia Department of Transportation shall be contacted to schedule a field review. Where guard rail is warranted, the standard shoulder width shall be provided and the guard rail shall be installed in accordance with the current edition of the VDOT Road and Bridge Standards as part of this development,
- 5. Standard street and traffic control signs shall be erected at each intersection by the developer prior to final street acceptance.
- 6. All traffic devices shall be in accordance with current edition of the "Manual on Uniform Traffic Control Devices" (MUTCD).
- 7. All unsuitable material shall be removed from the construction limits of the roadway before placing embankment.

See Sheet N/A for Stormwater Site Statistics Table. See Sheet N/A for New BMP Information Table.

The Project Engineer shall provide electronic copies of the approved plans to the Development Review Coordinator within 5 working days of the pre-construction meeting,

The notes on this sheet shall not be modified.



# COUNTY OF ROANOKE, VA

XCAVATION - IMPORT

STORM DRAIN MANHOLE

CURB & GUTTER CG-6

"WATER LINE

" WATER LINE

" WATER LINE

3-IN, PVC STORM PIPE, SDR-35

-IN. BIT. CONC.: TYPE SM9.5A

3-IN. BASE MATERIAL, TYPE 21B

FIRE HYDRANT ASSEMBLIES

10" SANITARY SEWER

10% CONTINGENCY

8 -IN, GATE VALVES, W/ VAULT, FRAME & COVER

COMBINATION FIRE / DOMESTIC VAULT ASS'Y.

STANDARD MANHOLE W/FRAME & COVER

AS-BUILT PLANS (STORM SEWER SYSTEMS)

ESTIMATED TOTAL - LANDLORD SITE IMPROVEMENTS

CONCRETE STAND-UP CURB CG-2

TANGLEWOOD HOLDINGS,


LLC, MANAGER OF

TANGLEWOOD VENTURE, LLC NEW CHILI'S RESTAURANT NAME OF DEVELOPMENT AM AWARE OF THE SITE DESIGN REQUIREMENTS IMPOSED BY THIS SITE AT TANGLEWOOD MALL DEVELOPMENT PLAN, ALL REVISIONS THEREOF, AND OTHER APPLICABLE ROANOKE COUNTY CODES AND ORDINANCES. MAGISTERIAL DISTRICT(S) CAVE SPRING I HEREBY CERTIFY THAT I AGREE TO COMPLY WITH THESE REQUIREMENTS SHOWN ON THIS COVER SHEET UNLESS MODIFIED IN ACCORDANCE WITH LOCAL LAW. TANGLEWOOD VENTURE LLC 700 MONTGOMERY HIGHWAY - SUITE 186 OWNER (name, address, telephone) BIRMINGHAM, AL 35216 CONTACT: MR. PHILLIP McAFEE, TEL: (205) 972-9637 PhillipM@BlackwaterResources.com DEVELOPER (name, address, telephone) (SAME AS OWNER) CALDWELL WHITE ASSOCIATES ATTN: CORBIN L. WHITE, PE ENGINEER, ARCHITECT OR SURVEYOR (name, address, telephone) PO BOX 6260 TEL.: (540) 366-3400 ROANOKE, VA 24017 EMAIL: CWAroanoke@aol.com TAX MAP NO(S) 077.16-01-02.00-0000

## WATER AND SEWER NOTES

- 1. All construction methods and materials shall conform to the latest edition of the Design and Construction Standards and Specifications of the Western Virginia Water Authority (WVWA) available at www.westernvawater.org or by contacting the authority at 540-853-5700. The project shall also comply with the governing jurisdiction's standards and other agency standards (e.g. VDOT, DEQ, DCR, VDH, etc.) where applicable.
- 2. A minimum cover of three (3) feet is required on all WVWA water and sewer lines.
- 3. All existing utilities may not be shown in their exact locations. The contractor shall notify Miss Utility and shall verify location and elevation of all underground utilities in the areas of construction prior to
- 4. Please show all WVWA water and sewer utilities on any development plan.
- 5. The location of existing utilities across or along the line of proposed work are not necessarily shown on the plans and where shown are only approximately correct. The contractor shall on his own initiative and at no extra cost, locate all underground lines and structures and pothole as necessary. The contractor shall be responsible for any damage to underground structures. All damage incurred to existing utilities during construction shall be repaired at the contractor's expense.
- 6. Plan approval by the WVWA does not remove the contractor's responsibility to remove or relocate any existing conflicts found during construction.
- 7. The contractor shall maintain a minimum of 18" clearance vertically and two (2) feet minimum rizontally from the outside of pipe to outside of pipe with all other un cannot be achieved, additional measures in accordance with the WVWA standards shall be enforced.
- 8. All utility grade adjustments shall be in accordance with WVWA standards and are the responsibility of
- 9. Field changes shall be submitted by the engineer of record to the locality and approved by the WVWA.

Western Virginia Water Authority Availability letter number: \_\_\_\_\_

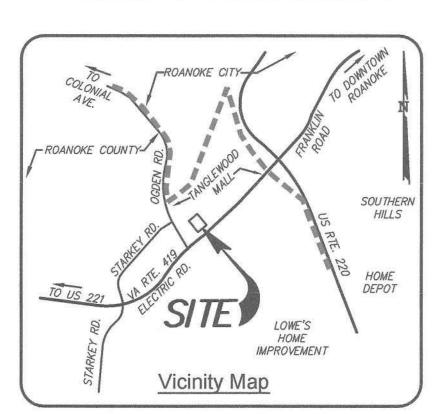

	LEG	SEND			
Property Line			P		
Right-of-way			R/W		
Centerline			CL		
Minimum Building Line	-	-		******	
Existing Storm Sewer	:	sd		sd	
Existing Sanitary Sewer		—ss —	0	ss	
Existing Water Main		w		w	
Existing Contour		-	-1045		
Proposed Contour	-		1045 —		
Proposed Drainage Divide		$\leftarrow$	H	$\leftarrow$	
Proposed Limits of Clearing			ang manakanan ara		manacan
Proposed Storm Sewer	-	-	24" S.D.	-	-
Proposed Sanitary Sewer	CONTRACTOR DE LA CONTRA		8" M.H.		
Proposed Water Main	HYDRANT	VAI	LVE	BLOWOFF	•

## PRIVATE UTILITIES

Underground utilities installed on private property or in private utility easements and building related storm drains shall be designed and installed per the current edition of the Virginia Uniform Statewide Building Code (including amendments). Design and installation requirements issued by the Western Virginia Water Authority that meet or exceed the USBC requirements are acceptable for private utilities. All private utilities are to be permitted through and inspected by the Roanoke County Inspections Office. Vaults, valves and other devices installed by or under the control of the Western Virginia Water Authority

PR #:	NOTES:
	REVISED DECEMBER 13, 2021 PER FIRST MUNICIPAL REVIEW — C.L. White

C-01	ROANOKE COUNTY COVER SHEET
C-02	NOTES AND LEGEND
C-03	EXISTING CONDITIONS AND SITE DEMOLITION PLAN
C-04	LANDLORD WORK - DIMENSIONAL LAYOUT PLAN
C-05	LANDLORD WORK - SOIL EROSION CONTROL PLAN
C-06	LANDLORD WORK - GRADING AND STORM DRAIN PLAN
C-07	LANDLORD WORK - SITE UTILITY PLAN
C-08	LANDLORD WORK - PROFILE-PUBLIC SANITARY SEWER
C-09	TENANT WORK — DIMENSIONAL LAYOUT AND LANDSCAPING PLAN
C-10	TENANT WORK - SOIL EROSION CONTROL PLAN
C-11	TENANT WORK - GRADING AND STORM DRAIN PLAN
C-12	TENANT WORK - SITE UTILITY PLAN
C-13	DETAILS - SITE CONSTRUCTION
C-14	EROSION CONTROL NARRATIVE, MEASURES & CONSTRUCTION SEQUENCING
C-15	DETAILS - SOIL EROSION & SEDIMENTATION CONTROL
C-16	DETAILS - WATER AND SANITARY SEWER

# Sheet Index

SURVEY INFORMATION

	cal control surveys were		2018 / 2021
	7000 2000 2000	22/3 22/2 2004 200-0 22	tic Vertical Datum of 1929 or 1988
	ions must be referenced		an Datum of 1927 or 1983.
Horizontal Datum:	VDOT RTE. 419 PROJ. #9999-080-876	Vertical Datum:	NAVD 88
Source of topograph	nic mapping is dated	FEBR	PUARY 2021
Boundary was perfo	ormed by CWA (ALTA	//NSPS) dated:	09/14/2016

Benchmark Information: VDOT MONUMENT LOCATED WEST OF MAIN ELECTRIC ROAD ENTRANCE

be accurate and correct.

ENTRANCE DOUBLE-YELLOW LINE (CWA TRAV. PNT. #2).

may not substituted for the code required devices.

REVISED DECEMBER 13, 2021 PER FIRST MUNICIPAL REVIEW — C.L. White
1

:01	ROANOKE COUNTY COVER SHEET
-02	NOTES AND LEGEND
-03	EXISTING CONDITIONS AND SITE DEMOLITION PLAN
-04	LANDLORD WORK - DIMENSIONAL LAYOUT PLAN
-05	LANDLORD WORK - SOIL EROSION CONTROL PLAN
-06	LANDLORD WORK GRADING AND STORM DRAIN PLAN
-07	LANDLORD WORK - SITE UTILITY PLAN
-08	LANDLORD WORK - PROFILE-PUBLIC SANITARY SEWER
-09	TENANT WORK — DIMENSIONAL LAYOUT AND LANDSCAPING PLAN
-10	TENANT WORK - SOIL EROSION CONTROL PLAN
-11	TENANT WORK - GRADING AND STORM DRAIN PLAN
-12	TENANT WORK - SITE UTILITY PLAN
:-13	DETAILS - SITE CONSTRUCTION
<del>-14</del>	EROSION CONTROL NARRATIVE, MEASURES & CONSTRUCTION SEQUENCING
-15	DETAILS - SOIL EROSION & SEDIMENTATION CONTROL
-16	DETAILS - WATER AND SANITARY SEWER

			tic Vertical Datum of 1929 or 1988.
	must be referenced <b>IT RTE. 419 PROJ</b> .	d to the North Americ	an Datum of 1927 or 1983.
	19999-080-876	_ Vertical Datum: _	NAVD 88
ce of topographic m	apping is dated	FEBR	PUARY 2021

DRIVE. VDOT MONUMENT '080-159' FOUND ± 167' WEST OF MAIN MALL

The professional seal and signature certifies the boundary survey and topographic mapping to

PR #:	NOTES:
	REVISED DECEMBER 13, 2021 PER FIRST MUNICIPAL REVIEW — C.L. White
	Davida Table
	Revision Table

ITEM	QUANTITY	UNIT	UNIT PRICE	COST- TENANT WORK	BONDABLE TENANT WORK
6" WATER LINE	64	LF	48.00	3,072	3,07
2" WATER LINE	65	LF	22.50	1,463	1,46
SPECIALTY VALVE (FDC, PIV, ETC.)	2	EA	1,500.00	3,000	3,00
SAMPLING MANHOLE/PORT	1 1	EA	1,800.00	1,800	1,80
GREASE INTERCEPTOR	1	EA	3,500.00	3,500	3,50
LANDSCAPING	1	LS	7,500.00	7,500	7,50
SUBTOTAL				\$ 20,335	\$ 20,33
10% CONTINGENCY				\$ 2,034	\$ 2,03
ESTIMATED TOTAL - TENANT SITE IMPROVMENTS	\$ 22,369	\$ 22,36			
ESTIMATED TOTAL - EROSION & SEDIMENT CONTROL (SEE SHEET C-15 FOR ITEMIZATION)				\$ 436	\$ 43
ESTIMATED TOTAL SURETY REQUIRED			\$ 22,805	\$ 22,80	

QUANTITY & COST ESTIMATE - LANDLORD WORK

555 C.Y.

2 EA

50 LF

460 LF

1,321 SY

295 C.Y.

21 LF

218 LF

192 LF

1 EA

1 EA

1 EA

2 EA

1 LS

3Y SEALING THE PLANS, THE DESIGN PROFESSIONAL HEREBY CERTIFIES THAT THE FOREGOING ESTIMATE REFLECTS THE CURRENT IMPROVEMENT COSTS OF THIS PROJECT.

QUANTITY & COST ESTIMATE - TENANT WORK

REVISED TO ENTIRELY SEPARATE LANDLORD

AND TENANT SURETY ESTIMATES 

LF

LANDLORD

\$11.100

1,000

13,110

13,870

8,260

1,134

4,320

2.250

1,300

10,000

22,140

4,000

2,500

\$ 110,008

\$11,001

\$121,009

10.464

WORK

PRICE

20.00

1,800.00

20.00

28.50

32.00

10.50

28.00

54.00

48.00

22.50

2,250.00

1,300.00

60.00

2,000.00

2,500.00

10,000.00

LANDLORD

WORK

\$11,100

3.600

1,000

13,110

13,870

8,260

1,134

10,464

4,320

2.250

1.300

10.000

22,140

4,000

2,500

\$110,008

\$ 11,001

\$121,009

Y SEALING THE PLANS, THE DESIGN PROFESSIONAL HEREBY CERTIFIES THAT THE FOREGOING ESTIMATE REFLECTS THE CURRENT IMPROVEMENT COSTS OF HIS PROJECT.

sbuilts - 11.11.22 nspector: Brian Whitenack Contractor: Bowman Excavating ub-Contractor: Jack St. Clair

Installed per plan no changes-BW\_wvwa inspector

# Materials

Water-Main to Vault- 6 inch DIP US PIPE CL350 Private Hydrant-AFC 2022 Hyd#P21039 Valve-6 inch AFC 18 turns left to open Sewer - 6" SDR26 National Pipe C.O

10"SDR35 National Pipe for relocated Sewer Main Manholes-CT Jamison with Capital Foundy water tight frame and lid with WVWA LOGO License No. 23843 12-13-2021











OWNER)

CHILI'S AT TANGLE OD INT 112 Ele NEW IGLEV RINKI Zm

C.L. White Date: October 27, 2021 Field Book: CH-23 W.O. No.: 21-0043/0084/0123

SHEET C-01