



## SEDIMENT BASIN SCHEMATIC ELEVATIONS

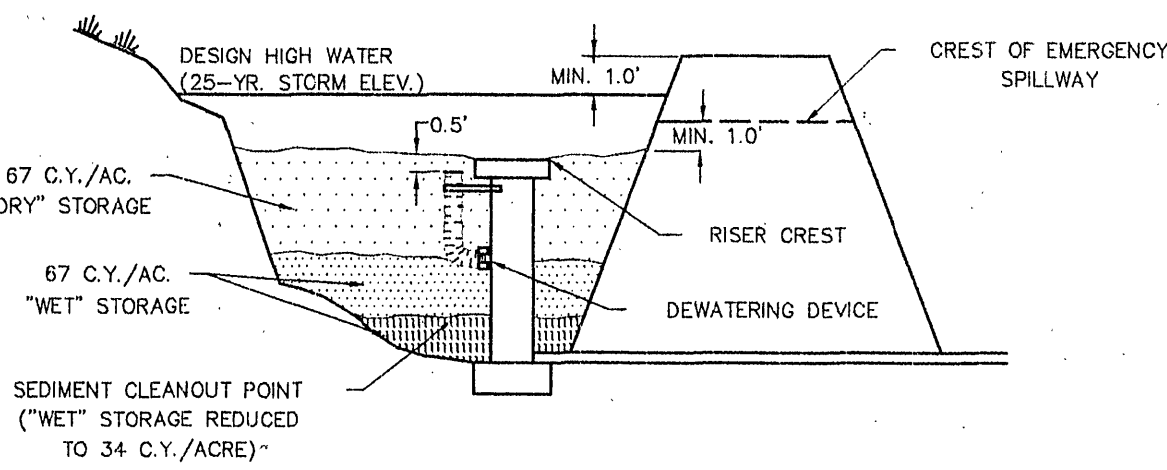


## DESIGN ELEVATIONS WITH EMERGENCY SPILLWAY

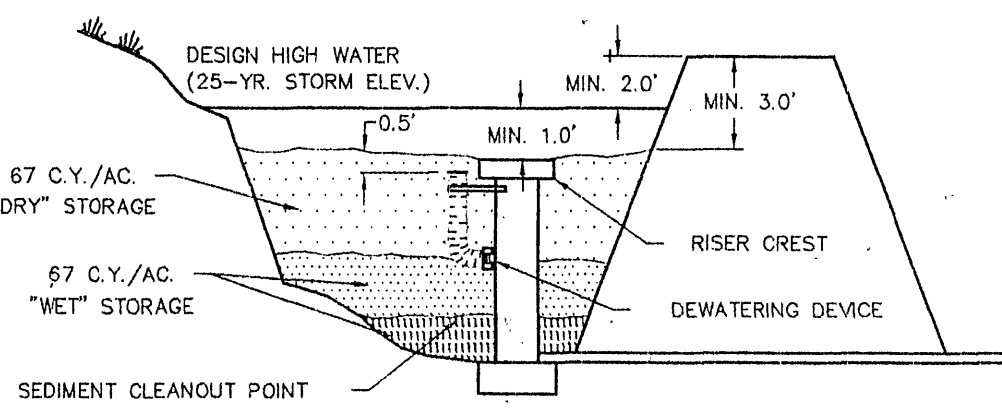


## DESIGN ELEVATIONS WITHOUT EMERGENCY SPILLWAY (RISER PASSES 25-YR. EVENT)

## PRINCIPAL SPILLWAY DESIGN

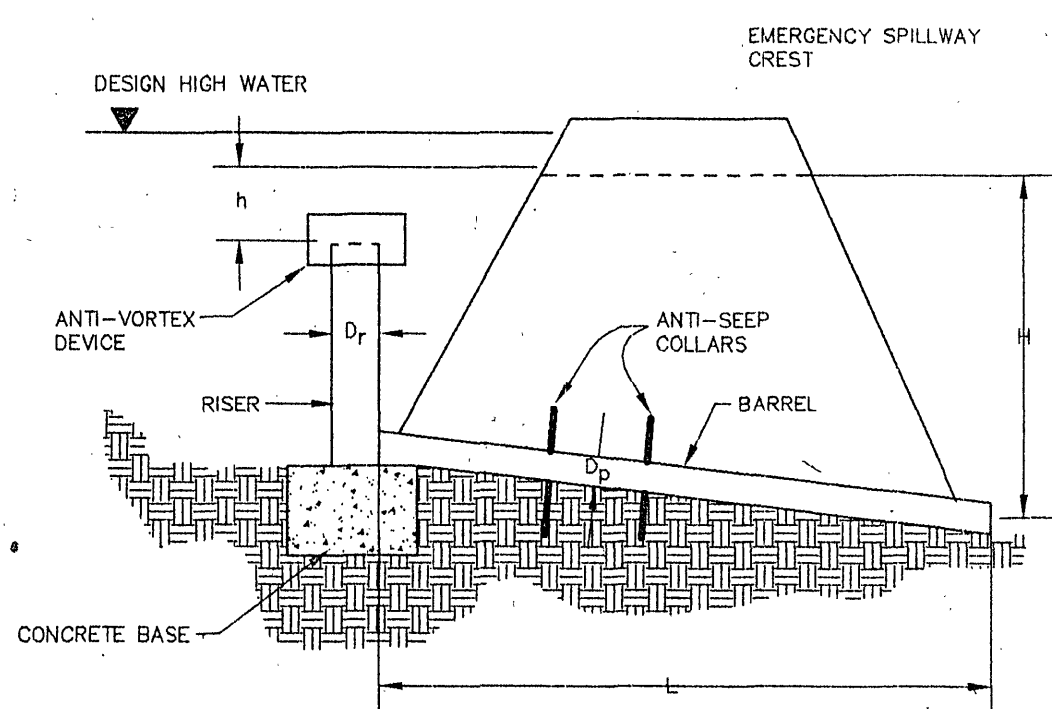


H = HEAD ON PIPE THROUGH EMBANKMENT  
h = HEAD OVER RISER CREST  
L = LENGTH OF PIPE THROUGH EMBANKMENT  
Dp = DIAMETER OF PIPE THROUGH EMBANKMENT  
Dr = DIAMETER OF RISER



## RISER PIPE BASE CONDITIONS

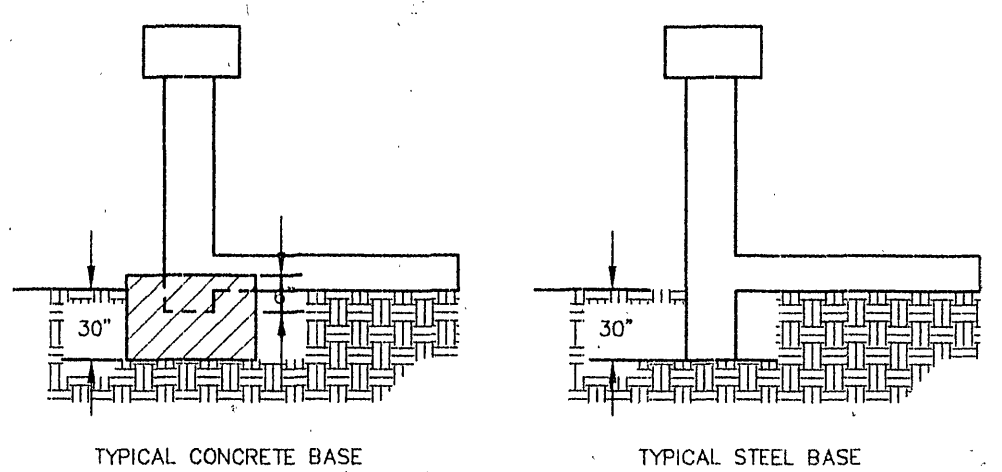


## ANTI-SEEP COLLAR

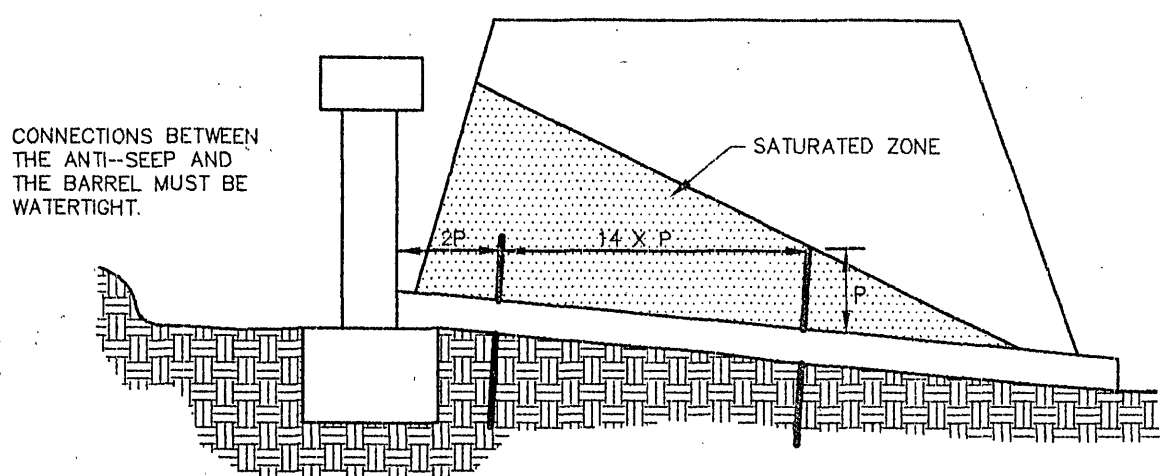

## RISER PIPE BASE CONDITIONS FOR EMBANKMENTS LESS THAN 10' HIGH

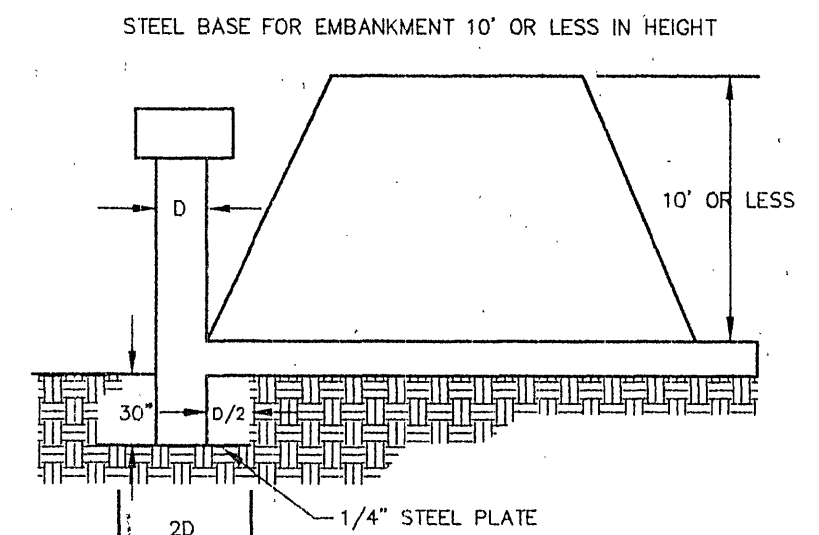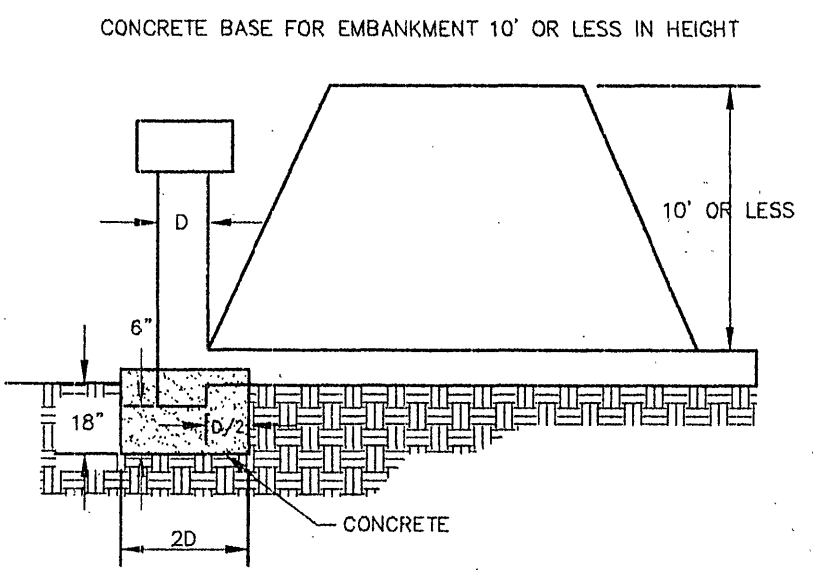


## RECOMMENDED DEWATERING SYSTEM FOR SEDIMENT BASINS

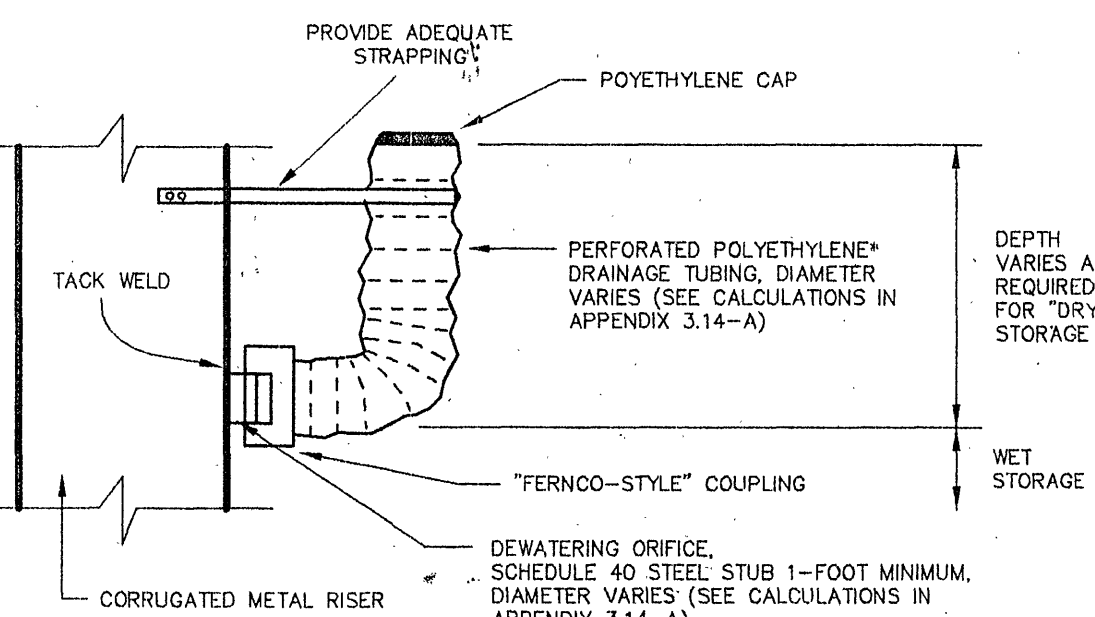


NOTE: WITH CONCRETE RISER, USE PVC SCHEDULE 40 STUB FOR DEWATERING ORIFICE

\*DRAINAGE TUBING SHALL COMPLY WITH ASTM F667 AND AASHTO M294

## EXAMPLE PLAN VIEWS OF BAFFLE LOCATIONS IN SEDIMENT BASINS

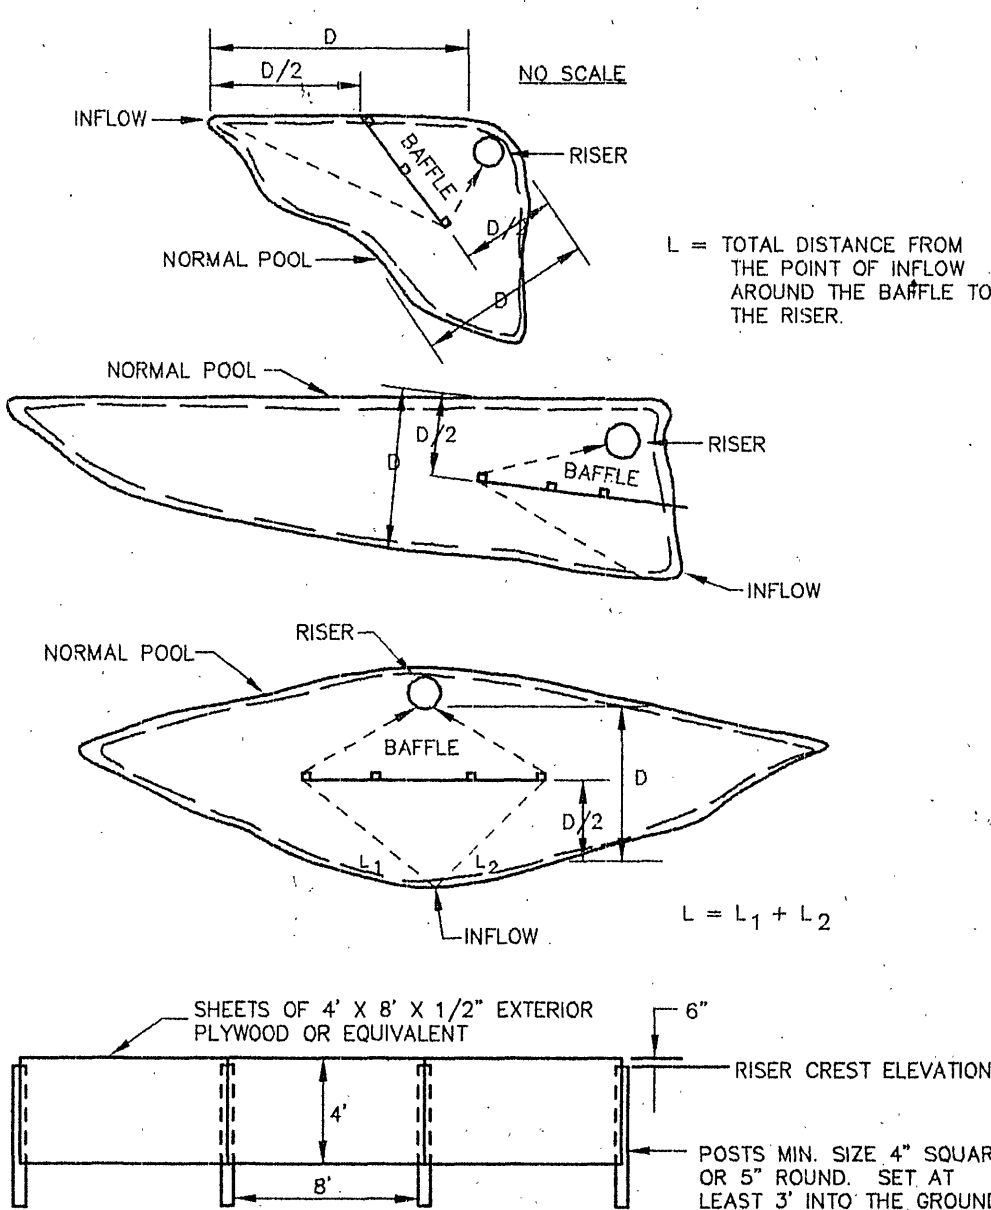

## ANTI-VORTEX DEVICE DESIGN

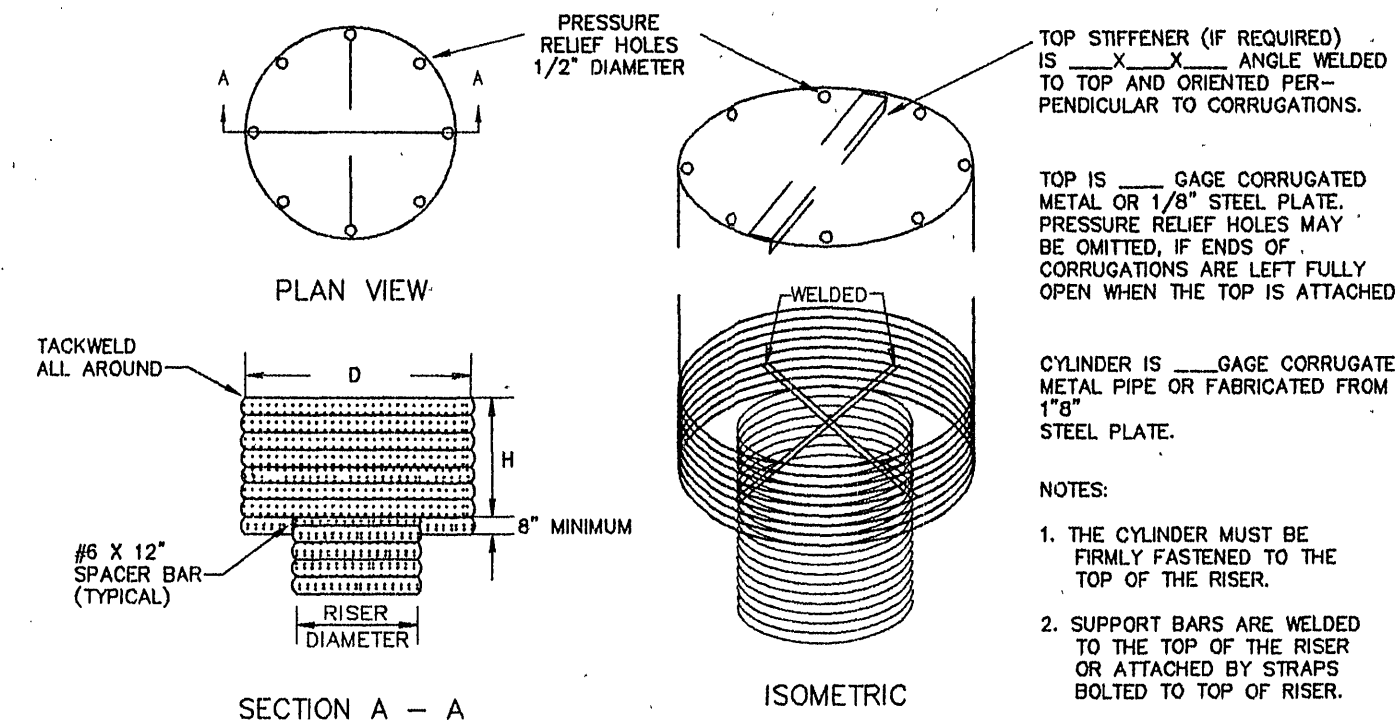


Riser Diam., in.	Cylinder			Minimum Size Support Bar	Minimum Top	
	Diameter, inches	Thickness, gage	Height, inches		Thickness	Stiffener
12	18	18	6	#6 Rebar or 1 1/2 x 1 1/2 x 3/16 angle	16 ga. (F&C)	-
15	21	16	7	-	-	-
18	27	16	8	-	-	-
21	30	16	11	-	16 ga (C), 14 ga (F)	-
24	36	16	13	-	-	-
27	42	16	15	-	-	-
36	54	14	17	#8 Rebar	14 ga (C), 12 ga (F)	-
42	60	16	19	-	-	-
48	72	16	21	1 1/4" pipe or 1 1/4 x 1 1/2 x 1/4 angle	14 ga (C), 10 ga (F)	-
54	78	16	25	-	-	-
60	90	14	29	1 1/2" pipe or 1 1/2 x 1 1/2 x 1/4 angle	12 ga (C), 8 ga (F)	-
66	96	14	33	2" pipe or 2 x 2 x 3/16 angle	12 ga (C), 8 ga (F) w/ stiffener	2 x 2 x 1/4 angle
72	102	14	36	-	-	2 1/2 x 2 1/2 x 1/4 angle
78	114	14	39	2 1/2" pipe or 2 x 2 x 1/4 angle	-	-
84	120	12	42	2 1/2" pipe or 2 1/2 x 2 1/2 x 1/4 angle	-	2 1/2 x 2 1/2 x 1/4 angle

Note: The criterion for sizing the cylinder is that the area between the inside of the cylinder and the outside of the riser is equal to or greater than the area inside the riser. Therefore, the above table is invalid for use with concrete pipe risers.

Note: Correction for 12"-36" pipe measures 2 2/3" x 1/2", for 42"-84" the corrugation measures 5" x 1" or 8" x 1".

Note: C = corrugated; F = flat


## DETAILS OF CORRUGATED METAL ANTI-SEEP COLLAR

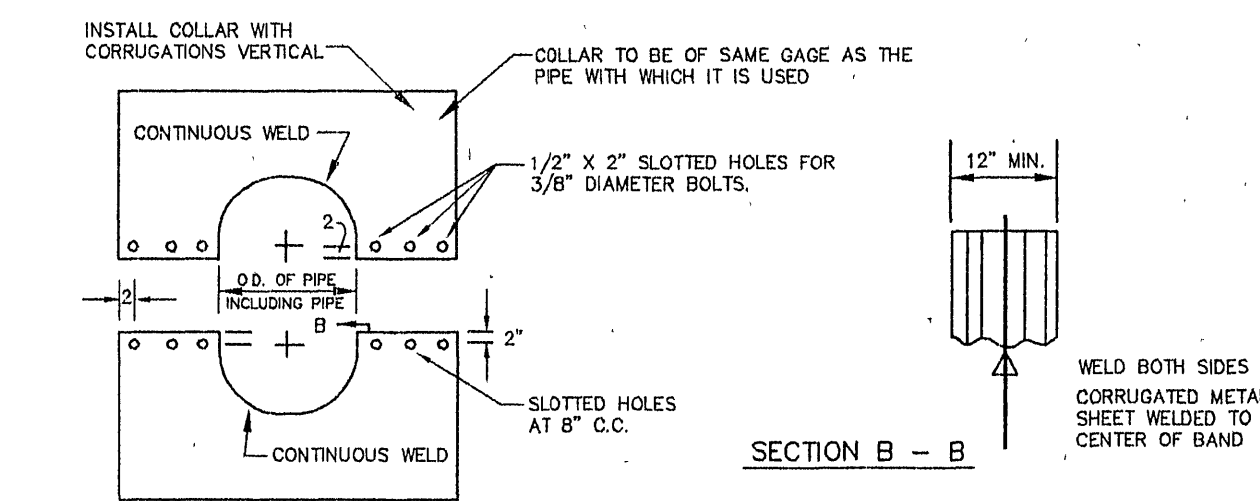

## ELEVATION OF UNASSEMBLED COLLAR

- NOTES:
1. ALL MATERIALS TO BE IN ACCORDANCE WITH CONSTRUCTION AND CONSTRUCTION MATERIAL SPECIFICATIONS.
  2. WHEN SPECIFIED ON THE PLANS, COATING OF COLLARS SHALL BE IN ACCORDANCE WITH CONSTRUCTION AND CONSTRUCTION MATERIAL SPECIFICATIONS.
  3. UNASSEMBLED COLLARS SHALL BE MARKED BY PAINTING OR TACKING TO IDENTIFY MATCHING PAIRS.
  4. THE LAP BETWEEN THE TWO HALF SECTIONS AND BETWEEN THE PIPE AND CONNECTING BAND SHALL BE CALKED WITH ASPHALT MASTIC AT TIME OF INSTALLATION.
  5. EACH COLLAR SHALL BE FURNISHED WITH TWO 1/2" DIAMETER RODS WITH STANDARD TANK LUGS FOR CONNECTING COLLARS TO PIPE.

## DETAIL OF HELICAL PIPE ANTI-SEEP COLLAR

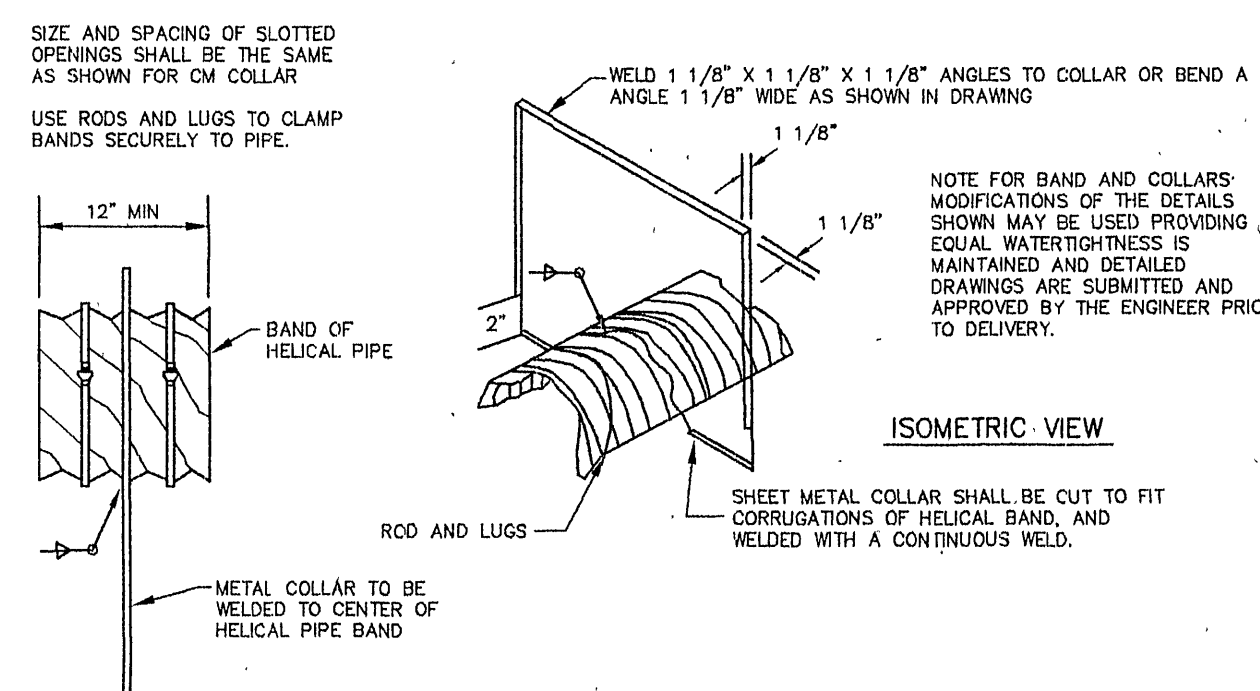

PARTIAL ELEVATION  
REF. ENGR. FIELD MANUAL

NOTE: TWO OTHER TYPES OF ANTI-SEEP COLLARS ARE:

1. CORRUGATED METAL, SIMILAR TO UPPER, EXCEPT SHOP WELDED TO A SHORT (4 FT.) SECTION OF THE PIPE AND CONNECTED WITH CONNECTING BANDS TO THE PIPE.
2. CONCRETE, SIX INCHES THICK FORMED AROUND THE PIPE WITH 42 REBAR SPACED 15" HORIZONTALLY AND VERTICALLY.

## CONSTRUCTION SPECIFICATIONS

### SITE PREPARATION

AREAS UNDER THE EMBANKMENT OR ANY STRUCTURAL WORKS RELATED TO THE BASIN SHALL BE CLEARED, GRUBBED, AND STRIPPED OF TOPSOIL TO REMOVE TREES, VEGETATION, ROOTS OR OTHER OBJECTIONABLE MATERIAL IN ORDER TO FACILITATE CLEANOUT AND RESTORATION, THE AREA OF MOST FREQUENT INUNDATION (MEASURED FROM THE TOP OF THE PRINCIPAL SPILLWAY) WILL BE CLEARED OF ALL BRUSH AND TREES.

### CUTOFF TRENCH

FOR EARTH-FILL EMBANKMENTS, A CUTOFF TRENCH SHALL BE EXCAVATED ALONG THE CENTERLINE OF THE DAM. THE TRENCH MUST EXTEND AT LEAST 1 FOOT INTO A STABLE, IMPERVIOUS LAYER OF SOIL AND HAVE A MINIMUM DEPTH OF 2 FEET. THE CUTOFF TRENCH SHALL EXTEND UP BOTH ADJUTMENTS TO THE RISER CREST ELEVATION. THE MINIMUM BOTTOM WIDTH SHALL BE 4 FEET, BUT ALSO MUST BE WIDE ENOUGH TO PERMIT OPERATION OF COMPACTION EQUIPMENT. THE SIDE SLOPES SHALL BE NO STEEPER THAN 1:1.

COMPACTION REQUIREMENTS SHALL BE THE SAME AS THOSE FOR THE EMBANKMENT. THE TRENCH SHALL BE DRAINED DURING THE BACKFILLING/COMPACTION OPERATIONS.

### EMBANKMENT

THE FILL MATERIAL SHALL BE TAKEN FROM APPROVED BORROW AREAS. IT SHALL BE CLEAN MINERAL SOIL, FREE OF ROOTS, WOODY VEGETATION, STUMPS, SOD, OVERSIZED STONES, ROCKS, OR OTHER PERISHABLE OR OBJECTIONABLE MATERIAL. THE MATERIAL SELECTED MUST HAVE ENOUGH STRENGTH FOR THE DAM TO REMAIN STABLE AND BE TIGHT ENOUGH WHEN PROPERLY COMPACTED, TO PREVENT EXCESSIVE PERCOLATION OF WATER THROUGH THE DAM. FILL CONTAINING PARTICLES RANGING FROM SMALL GRAVEL OR COARSE SAND TO FINE SAND AND CLAY IN DESIRED PROPORTION IS APPROPRIATE. ANY EMBANKMENT MATERIAL SHOULD CONTAIN APPROXIMATELY 20% CLAY PARTICLES BY WEIGHT. USING THE UNIFIED SOIL CLASSIFICATION SYSTEM, SC (CLAYEY SAND), GC (CLAYEY GRAVEL) AND CL ("LOW LIQUID LIMIT" CLAY) ARE AMONG THE PREFERRED TYPES OF EMBANKMENT SOILS. AREA ON WHICH FILL IS TO BE PLACED SHALL BE SCARIFIED PRIOR TO PLACEMENT OF FILL. THE MATERIAL SHOULD CONTAIN THE PROPER AMOUNT OF MOISTURE TO ENSURE THAT 95% COMPACTION WILL BE ACHIEVED. FILL MATERIAL WILL BE PLACED IN 6-INCH CONTINUOUS LAYERS OVER THE ENTIRE LENGTH OF THE FILL. COMPACTION SHALL BE OBTAINED BY ROUTING THE HAULING EQUIPMENT OVER THE FILL SO THAT THE ENTIRE SURFACE OF THE FILL IS TRANSVERSED BY AT LEAST ONE WHEEL OR TREAD TRACK OF THE EQUIPMENT, OR BY USING A COMPACTOR. SPECIAL CARE SHALL BE TAKEN IN COMPACTION AROUND THE ANTI-SEEP COLLARS (COMPACT BY HAND, IF NECESSARY) TO AVOID DAMAGING OR COMPACTING THE EMBANKMENT. THE EMBANKMENT SHALL BE CONSTRUCTED TO AN ELEVATION 10% HIGHER THAN THE DESIGN HEIGHT TO ALLOW FOR SETTLEMENT IF COMPACTION IS OBTAINED WITH HAULING EQUIPMENT. IF COMPACTORS ARE USED FOR COMPACTION, THE OVERBUILD MAY BE REDUCED TO NOT LESS THAN 5%.

### PRINCIPAL SPILLWAY

THE RISER OF THE PRINCIPAL SPILLWAY SHALL BE SECURELY ATTACHED TO THE BARREL BY A WATERTIGHT CONNECTION. THE BARREL AND RISER SHALL BE PLACED ON A FIRMLY COMPACTED SOIL FOUNDATION. THE BASE OF THE RISER SHALL BE FIRMLY ANCHORED ACCORDING TO DESIGN CRITERIA TO PREVENT ITS FLOATING. PERVIOUS MATERIALS SUCH AS SAND, GRAVEL, OR CRUSHED STONE SHALL NOT BE USED AS BACKFILL AROUND THE BARREL OR ANTI-SEEP COLLARS. SPECIAL CARE SHALL BE TAKEN IN COMPACTION AROUND THE ANTI-SEEP COLLARS (COMPACT BY HAND, IF NECESSARY). FILL MATERIAL SHALL BE PLACED AROUND THE PIPE IN 4-INCH LAYERS AND COMPACTION UNTIL 95% COMPACTION IS ACHIEVED. A MINIMUM OF TWO FEET OF FILL SHALL BE HAND-COMPACTED OVER THE BARREL BEFORE CROSSING IT WITH CONSTRUCTION EQUIPMENT.

### EMERGENCY SPILLWAY

VEGETATION EMERGENCY SPILLWAYS SHALL NOT BE CONSTRUCTED OVER FILL MATERIAL. DESIGN ELEVATIONS, WIDTH, ENTRANCE AND EXIT CHANNEL SLOPES ARE CRITICAL TO THE SUCCESSFUL OPERATION OF THE SPILLWAY AND SHOULD BE ADHERED TO CLOSELY DURING CONSTRUCTION.

### VEGETATION STABILIZATION

THE EMBANKMENT AND EMERGENCY SPILLWAY OF THE SEDIMENT BASIN SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT VEGETATION IMMEDIATELY AFTER INSTALLATION OF THE BASIN SEE TEMPORARY SEEDING, STD. & SPEC. 3.31 OR PERMANENT SEEDING, STD. & SPEC. 3.32).

### EROSION AND SEDIMENT CONTROL

THE CONSTRUCTION OF THE SEDIMENT BASIN SHALL BE CARRIED OUT IN A MANNER SUCH THAT IT DOES NOT RESULT IN SEDIMENT PROBLEMS DOWNSTREAM.

### SAFETY

ALL STATE AND LOCAL REQUIREMENTS SHALL BE MET CONCERNING FENCING AND SIGNS WARNING THE PUBLIC OF THE HAZARDS OF SOFT, SATURATED SEDIMENT AND FLOOD WATERS (REFER TO STD. & SPEC. 3.01, SAFETY FENCE).


### MAINTENANCE

THE BASIN EMBANKMENT SHOULD BE CHECKED REGULARLY TO ENSURE THAT IT IS STRUCTURALLY SOUND AND HAS NOT BEEN DAMAGED BY EROSION OR CONSTRUCTION EQUIPMENT.


THE EMERGENCY SPILLWAY SHOULD BE CHECKED REGULARLY TO ENSURE THAT ITS LINING IS WELL ESTABLISHED AND EROSION-RESISTANT.

THE BASIN SHOULD BE CHECKED AFTER EACH RUNOFF-PRODUCING RAINFALL FOR SEDIMENT CLEANOUT. WHEN THE SEDIMENT REACHES THE CLEAN-OUT LEVEL, IT SHALL BE REMOVED AND PROPERLY DISPOSED OF.


## TEMPORARY SLOPE DRAIN

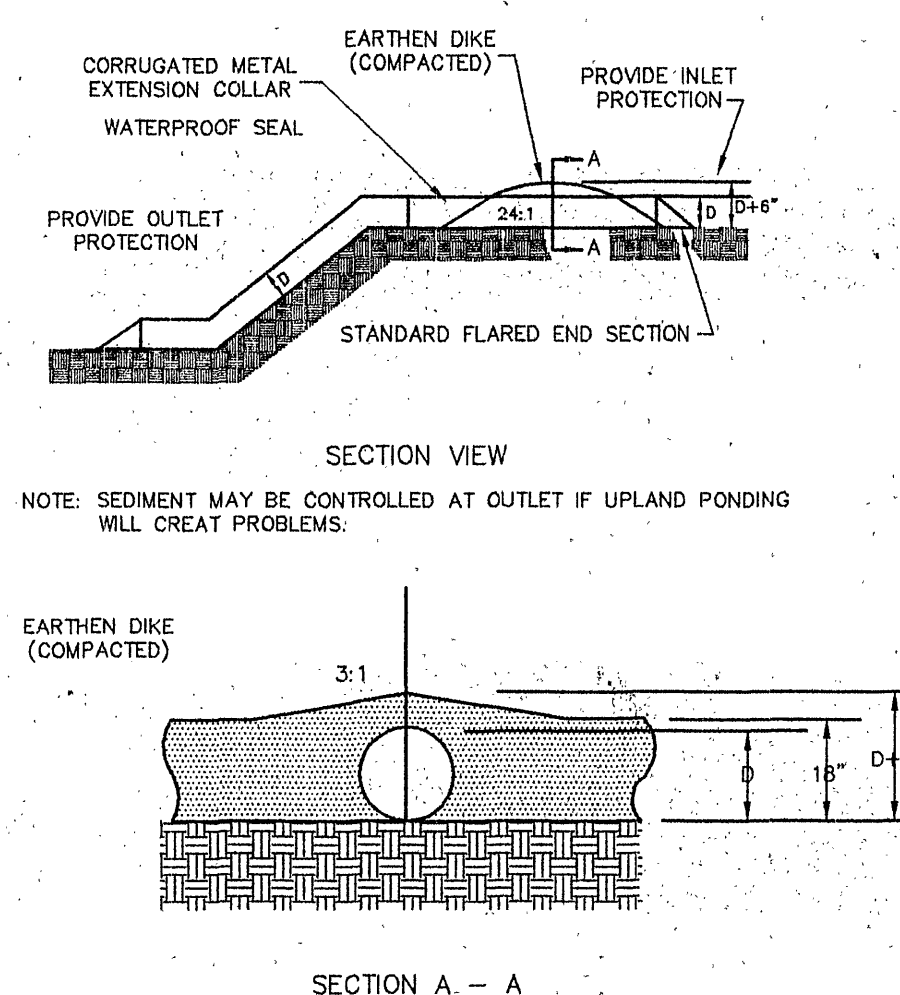

## EXCAVATED EARTH SPILLWAY

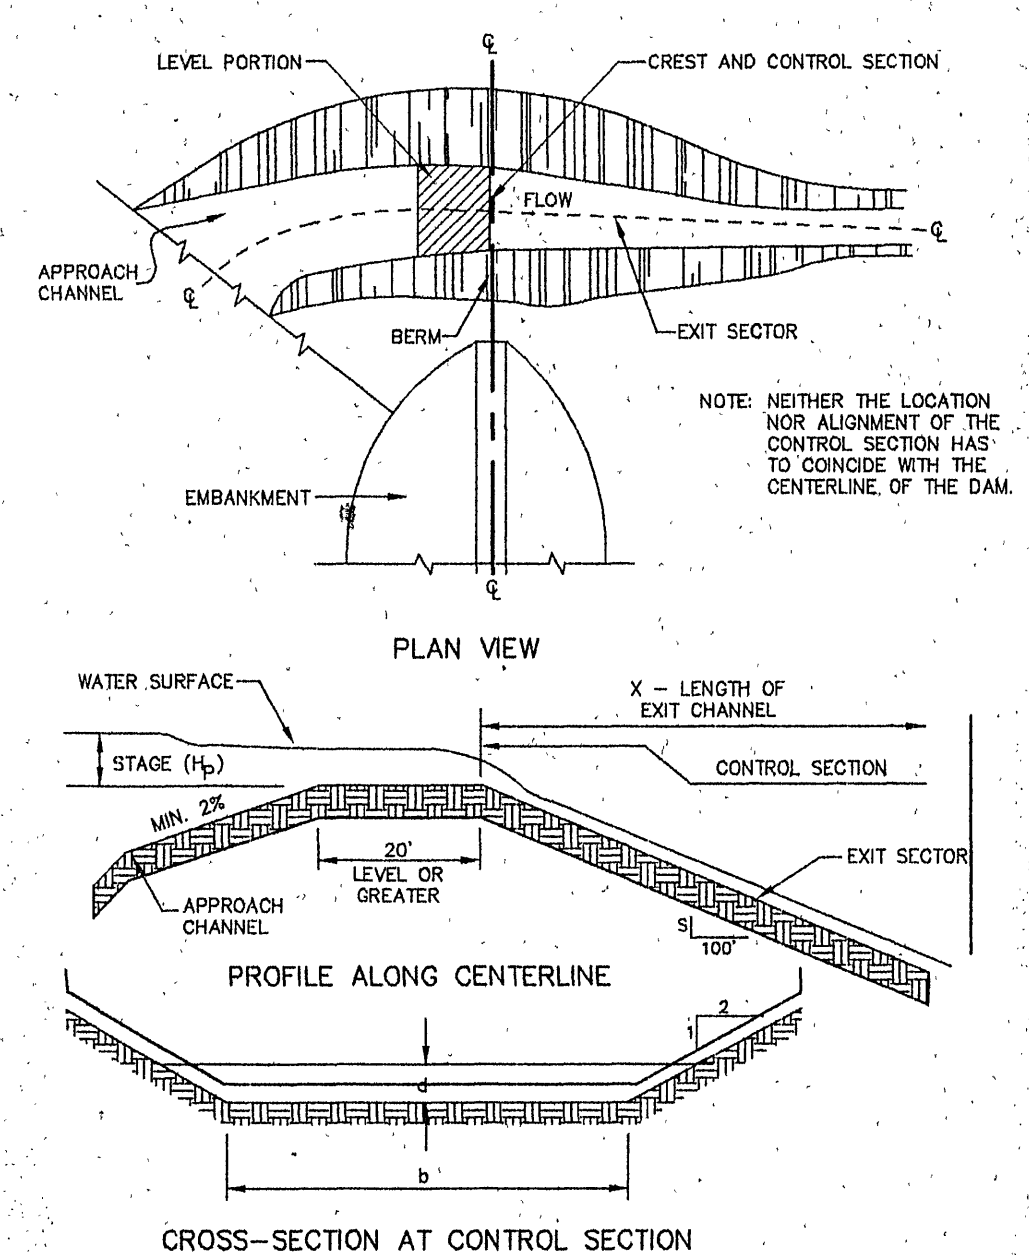

LUMSDEN ASSOCIATES, P.C.  
ENGINEERS-SURVEYORS-PLANNERS  
ROANOKE, VIRGINIA



COMMUNITY OF VIRGINIA  
MICHAEL S. WEBB  
No. 012656  
6-7-02  
PROFESSIONAL ENGINEER

## SEDIMENT BASIN DETAILS

THE ORCHARDS  
SECTION No. 2  
CORTLAND MEADOWS  
PREPARED FOR  
F. & W. COMMUNITY DEVELOPMENT CORP.  
HOLLINS MAGISTERIAL DISTRICT - ROANOKE COUNTY, VIRGINIA  
VALLEY MAGISTERIAL DISTRICT - BOTETOURT COUNTY, VIRGINIA

NO.	DATE	REVISIONS	DESCRIPTION
1			
2			
3			
4			
5			

DATE: 6 JUNE 2002

SCALE: NO SCALE

COMMISSION NO: 01-307

CADD FILE: C:\GEO\ENGR\JOEY\PLANS\307COMP

SHEET 12 OF 12

WWW.ID#6PVJHL