


[illegible]


1. PLEASE NOTE:

THE LISTED ASBESTOS DESIGNATIONS ARE FOR DISCUSSION ONLY. THE STONE MUST BE AND BE CLEAN, DRY, AND UNPAVED. FOR EXAMPLE, A BISHOPCHURCH ASBESTOS LISTING FOR #4 STONE WOULD STATE: "VULCAN GRAPHS, ANDIA RD. #4 (ASBESTOS) STONE". CONCREDES WITH A REINFORCING STEEL BAR OR REINFORCING STEEL BAR WITH A REINFORCING STEEL BAR, WHEREIN REINFORCING STEEL BARS MAY BE COMPROMISED BY CRACKING, FOR STANDARD DESIGN LOAD CONDITIONS, A FULL SURFACE MAY BE ACHIEVED BY REPAIRING OR DRAGGING WITHOUT. COMPACTATION REQUIRED. ONCE LAYER 2 IS PLACED, ANY SUBSOLAR CAN BE PLACED IN LAYER 2 UP TO THE FINISHED GRADE. MOST PAYMENT SURFACES SOLE CAN BE USED TO REPLACE THE MATERIALS REQUIREMENTS OF LAYER 2 OR 3 AT THE SITE. SPECIAL CONSTRUCTION DISTRICT.

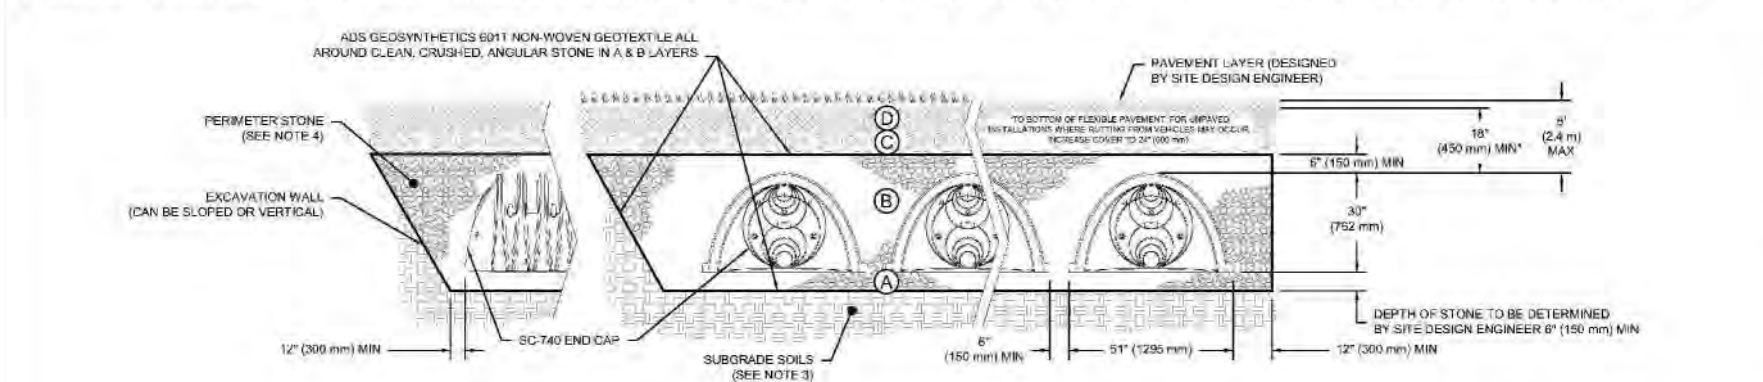

**NOTES:**

- [illegible]

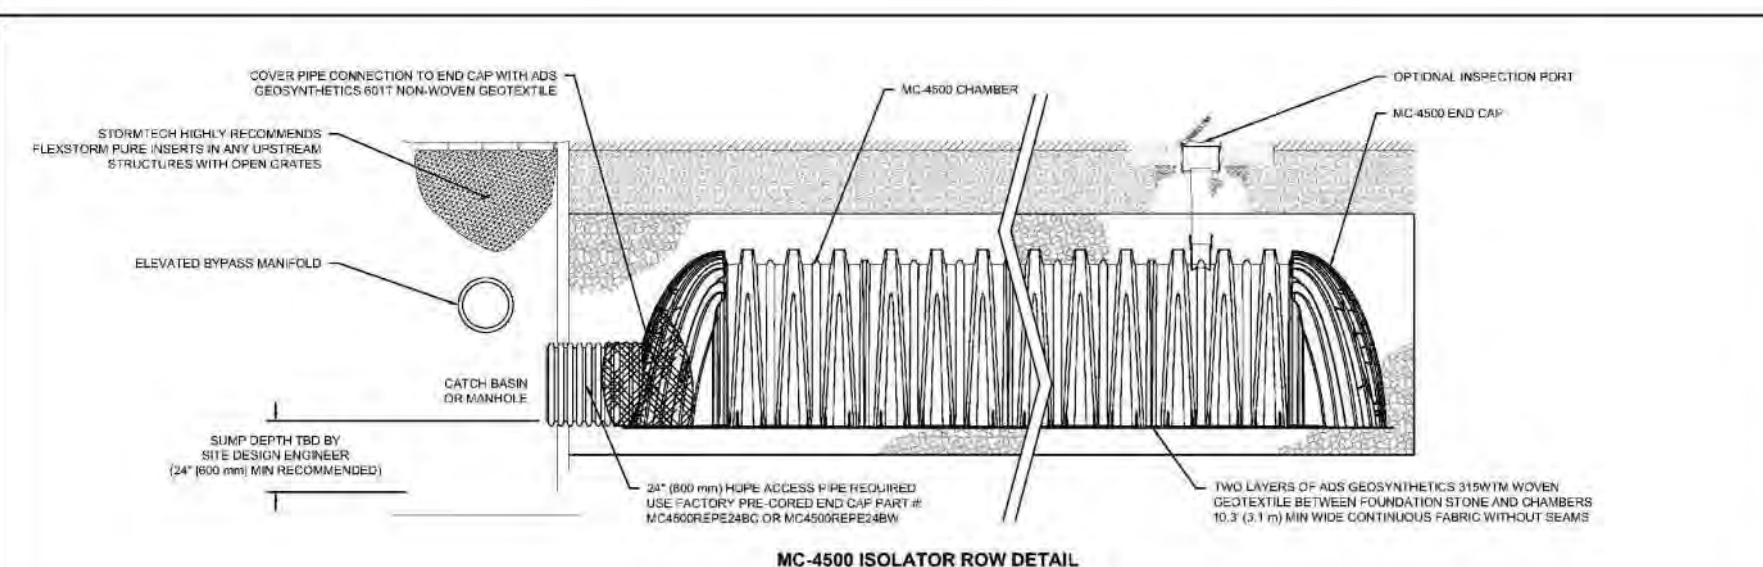

## INSPECTION & MAINTENANCE

- [illegible]


NOTES

1. INSPECT EVERY 6 MONTHS DURING THE FIRST YEAR OF OPERATION. ADJUST THE INSPECTION INTERVAL BASED ON PREVIOUS OBSERVATIONS OF SEDIMENT ACCUMULATION AND HIGH WATER ELEVATIONS.
  2. CONDUCT TESTING AND VACUUMING ANNUALLY OR WHEN INSPECTION SHOWS THAT MAINTENANCE IS NECESSARY.

NOTES:


  1. INSPECTION PORT MAY BE CONNECTED THROUGH ANY CHAMBER CORRUGATION VALLEY.
  2. ALL SCHEDULE 40 FITTINGS TO BE SOLVENT CEMENTED (4" PVC NOT PROVIDED BY AGS).

**4" PVC INSPECTION PORT DETAIL**

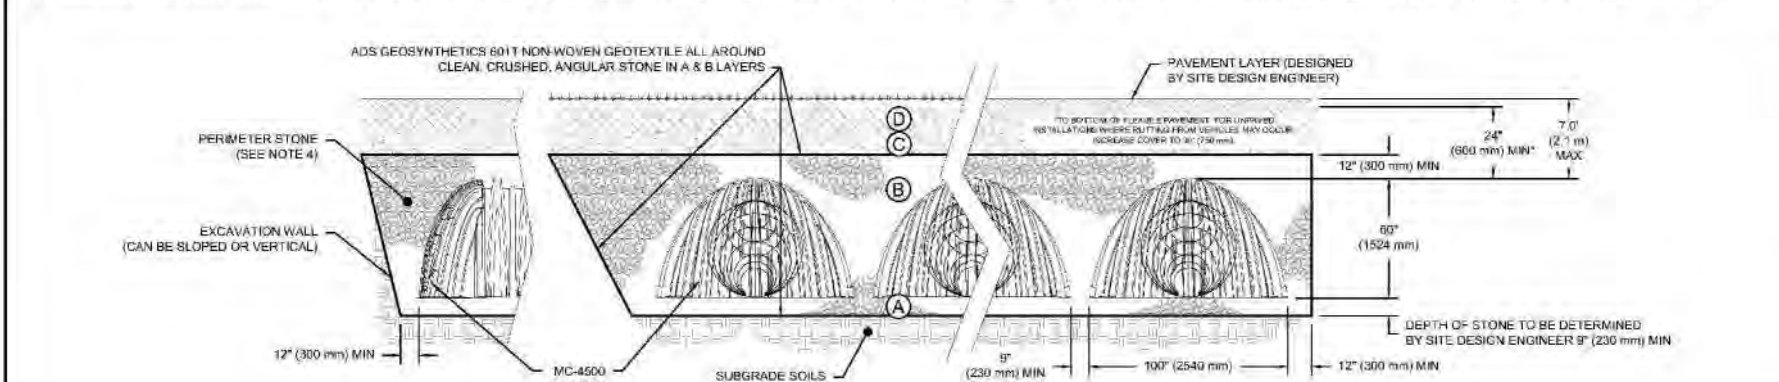
[illegible][illegible]

## NOTES

- NOTES:**
1. THE FOLLOWING ARE THE REQUIREMENTS OF ASTM D1587, STANDARD SPECIFICATION FOR STRUCTURAL POLYPROPYLENE (PP), COMPARTMENT 1A, STAPORFLOOR COMBINATION CHAMBER CLASSIFICATION 150-01.
2. MASS CHAMBERS SHALL BE ASSEMBLED IN ACCORDANCE WITH ASTM F1576, STANDARD PRACTICE FOR FLOORING, LEVELS OF PERFORMANCE, COMPARTMENT 1A, STAPORFLOOR COLLECTION, CHAMBERS.
3. THE STAPORFLOOR SHALL BE MANUFACTURED TO THE FOLLOWING REQUIREMENTS: THE BEARING RESISTANCE ALLOWING AVERAGE BEARING CAPACITY OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION TIE WITH COMBINATION FOR THE RANGE OF SUBGRADE RESISTANCE CONDITIONS.
4. PERMITTED SOILS MUST BE EXTENDED HORIZONTALLY TO THE EXCAVATION WALLS FROM BOTH VERTICAL AND SLOPED EXCAVATION WALLS.
5. REQUIREMENTS FOR MANUFACTURING AND INSTALLATION:
6. STAPORFLOOR ON THE FLOORS OF EXCAVATION SHAPING AND FINISHED CHAMBERS SHALL HAVE INTEGRAL, ANCHORED, ANCHORED ANCHORING LUGS.
7. THE STAPORFLOOR, AFTER CORRECT INSTALLATION AND ANCHORING, THE HEIGHT OF THE STAPORFLOOR ON FINISH SHALL BE LESS THAN 1".
8. REGARDING THE PROTECT OF THE EXCAVATION SHAPING AND FINISHED CHAMBERS, THE STAPORFLOOR COMBINATION, AS DEFINED BY PARTS OF 6 OF ASTM F1576, SHALL BE GREATER THAN OR EQUAL TO 100 LBS/INCH.
9. THE STAPORFLOOR SHALL BE MANUFACTURED TO THE FOLLOWING REQUIREMENTS: THE BEARING RESISTANCE ALLOWING AVERAGE BEARING CAPACITY OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION TIE WITH COMBINATION FOR THE RANGE OF SUBGRADE RESISTANCE CONDITIONS.

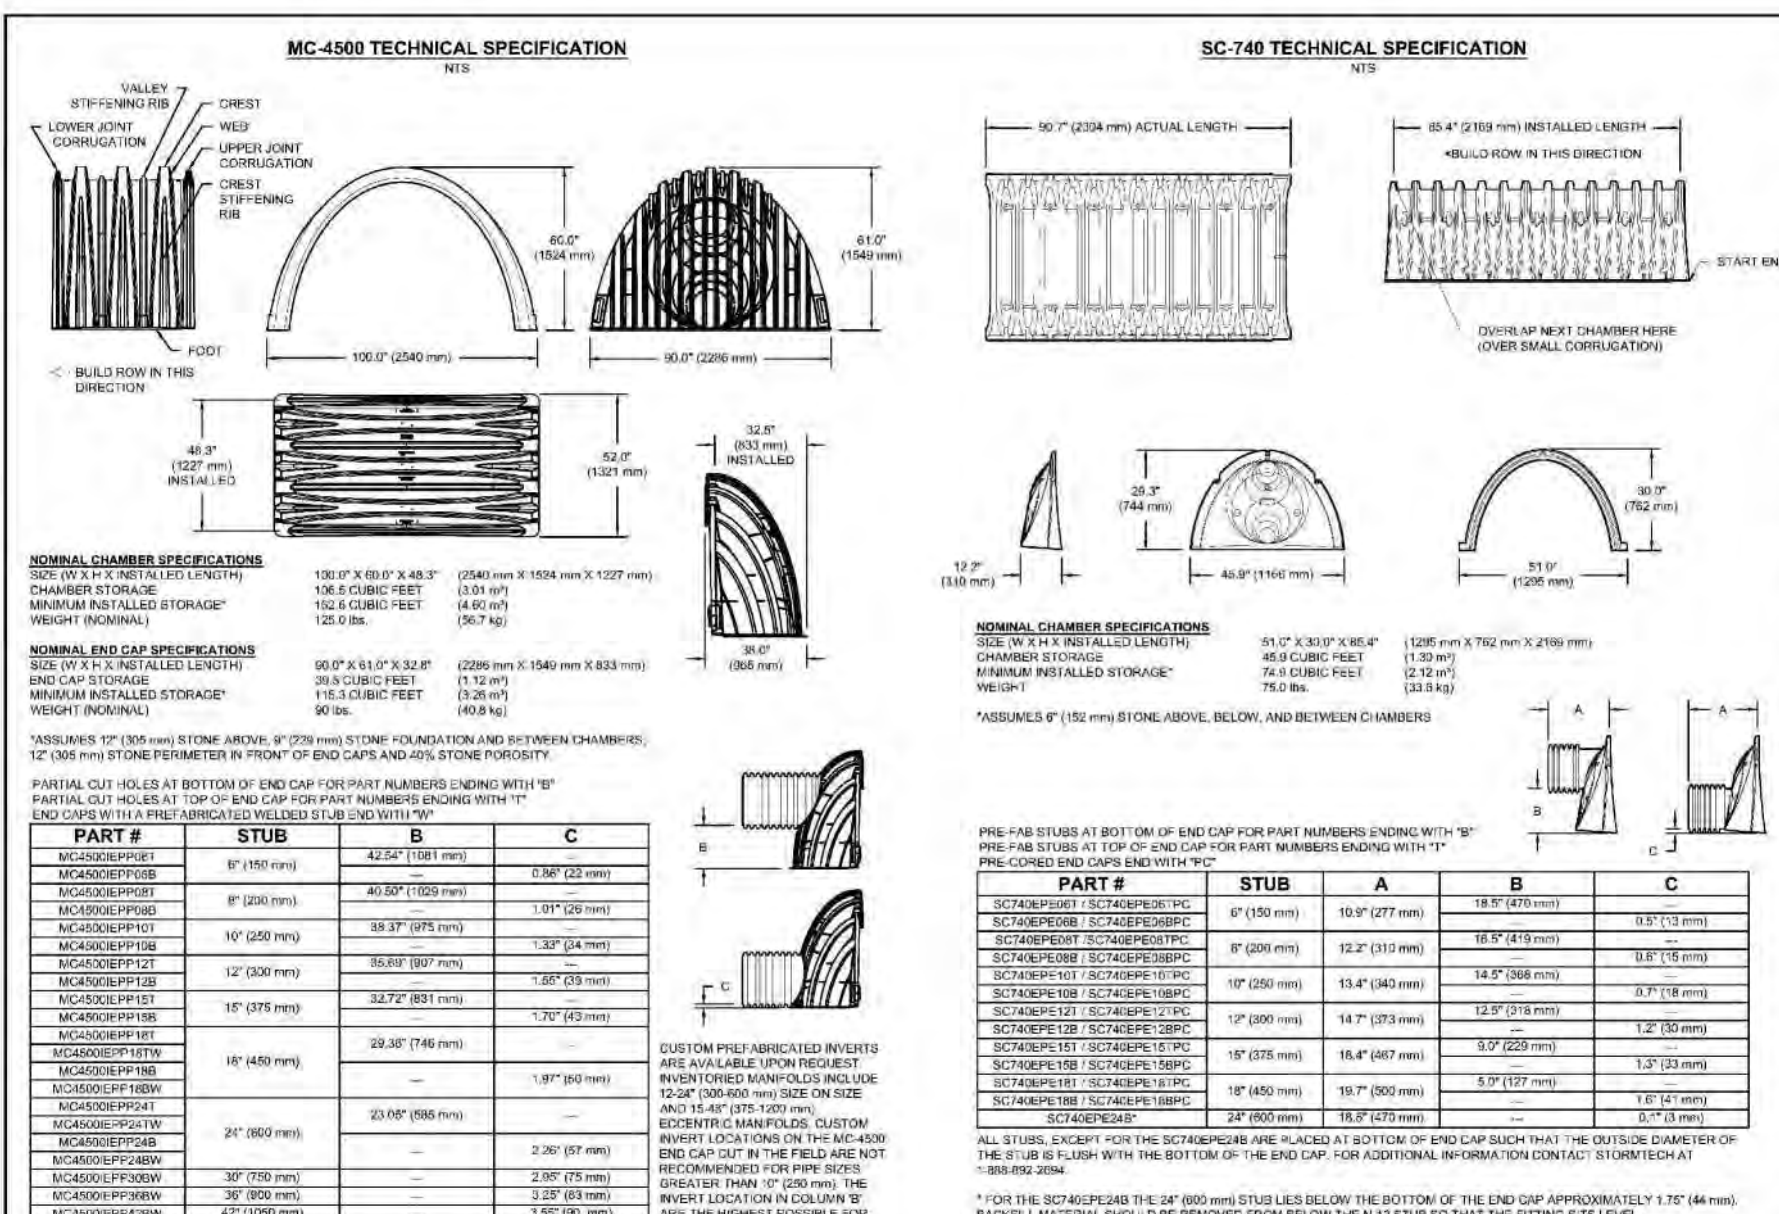

NOTE: ALL DIMENSIONS ARE NOMINAL

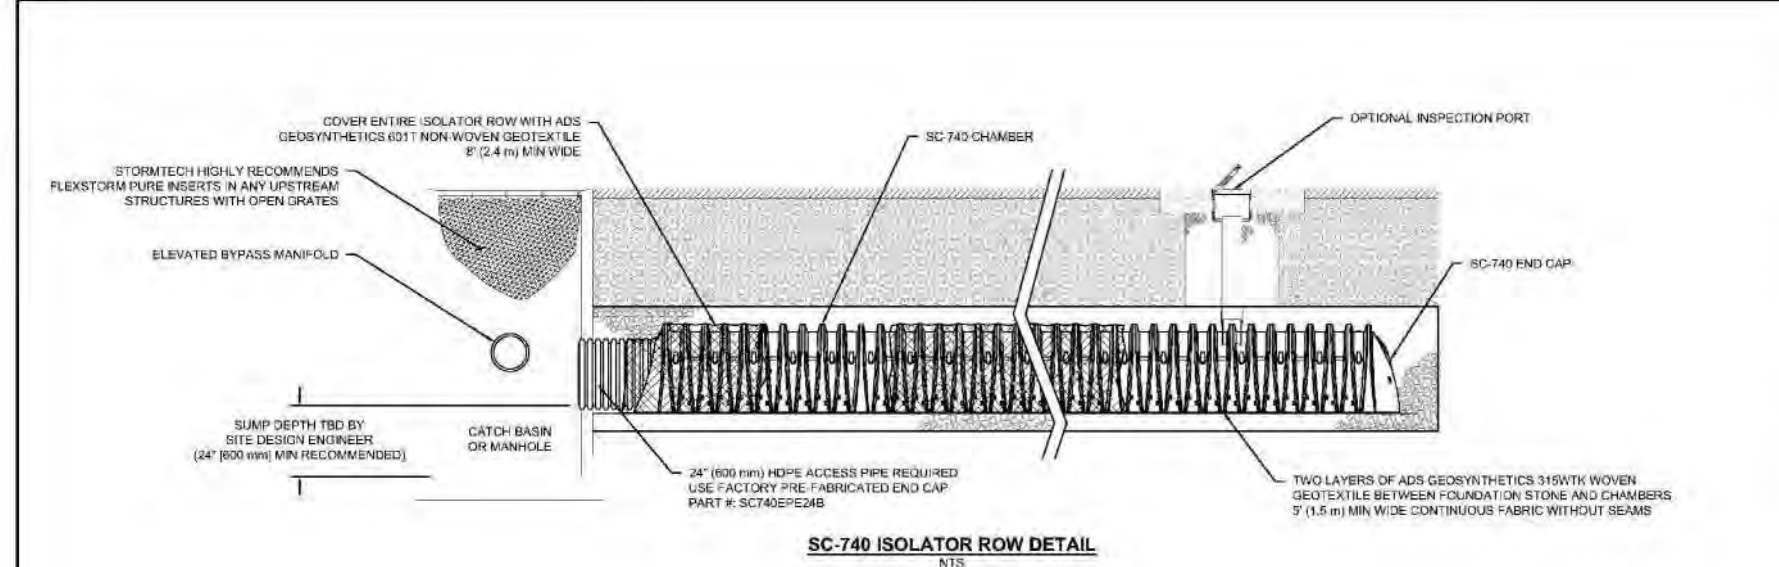


## INSPECTION &amp; MAINTENANCE



- [illegible]

**NOT**

- |   |   |   |
|---|---|---|
| 1. INSPECT EVERY 6 MONTHS DURING THE FIRST YEAR OF OPERATION, ADJUST THE INSPECT ON INTERVAL BASED ON PREVIOUS OBSERVATIONS OF SEDIMENT ACCUMULATION AND HIGH WATER ELEVATIONS. | 2. CONDUCT JETTING AND VACUUMING ANNUALLY OR WHEN INSPECTION SHOWS THAT MAINTENANCE IS NECESSARY. | LOCATION<br>_____   |
| NOTES:<br>1. INSPECTION PORTS MAY BE CONNECTED THROUGH ANY CHANNELS OR DRAINAGE VALLEY.<br>2. ALL SCHEDULE 40 FITTINGS TO BE SOLVENT CEMENTED (4" PVC NOT INSTALLED BY REEL)    |   | <b>CONNECTION DETAIL</b><br> |

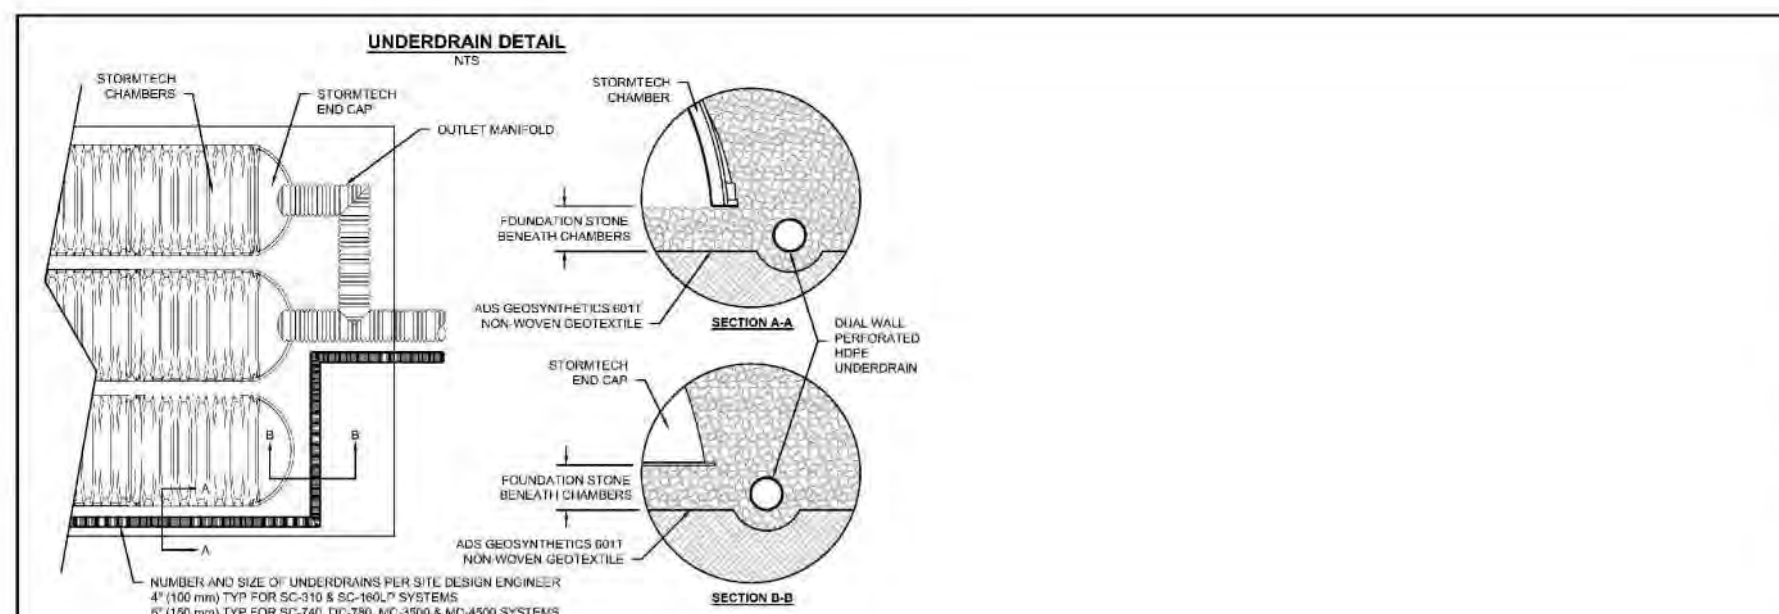

## MC-SERIES END CAP INSERTION DETAIL

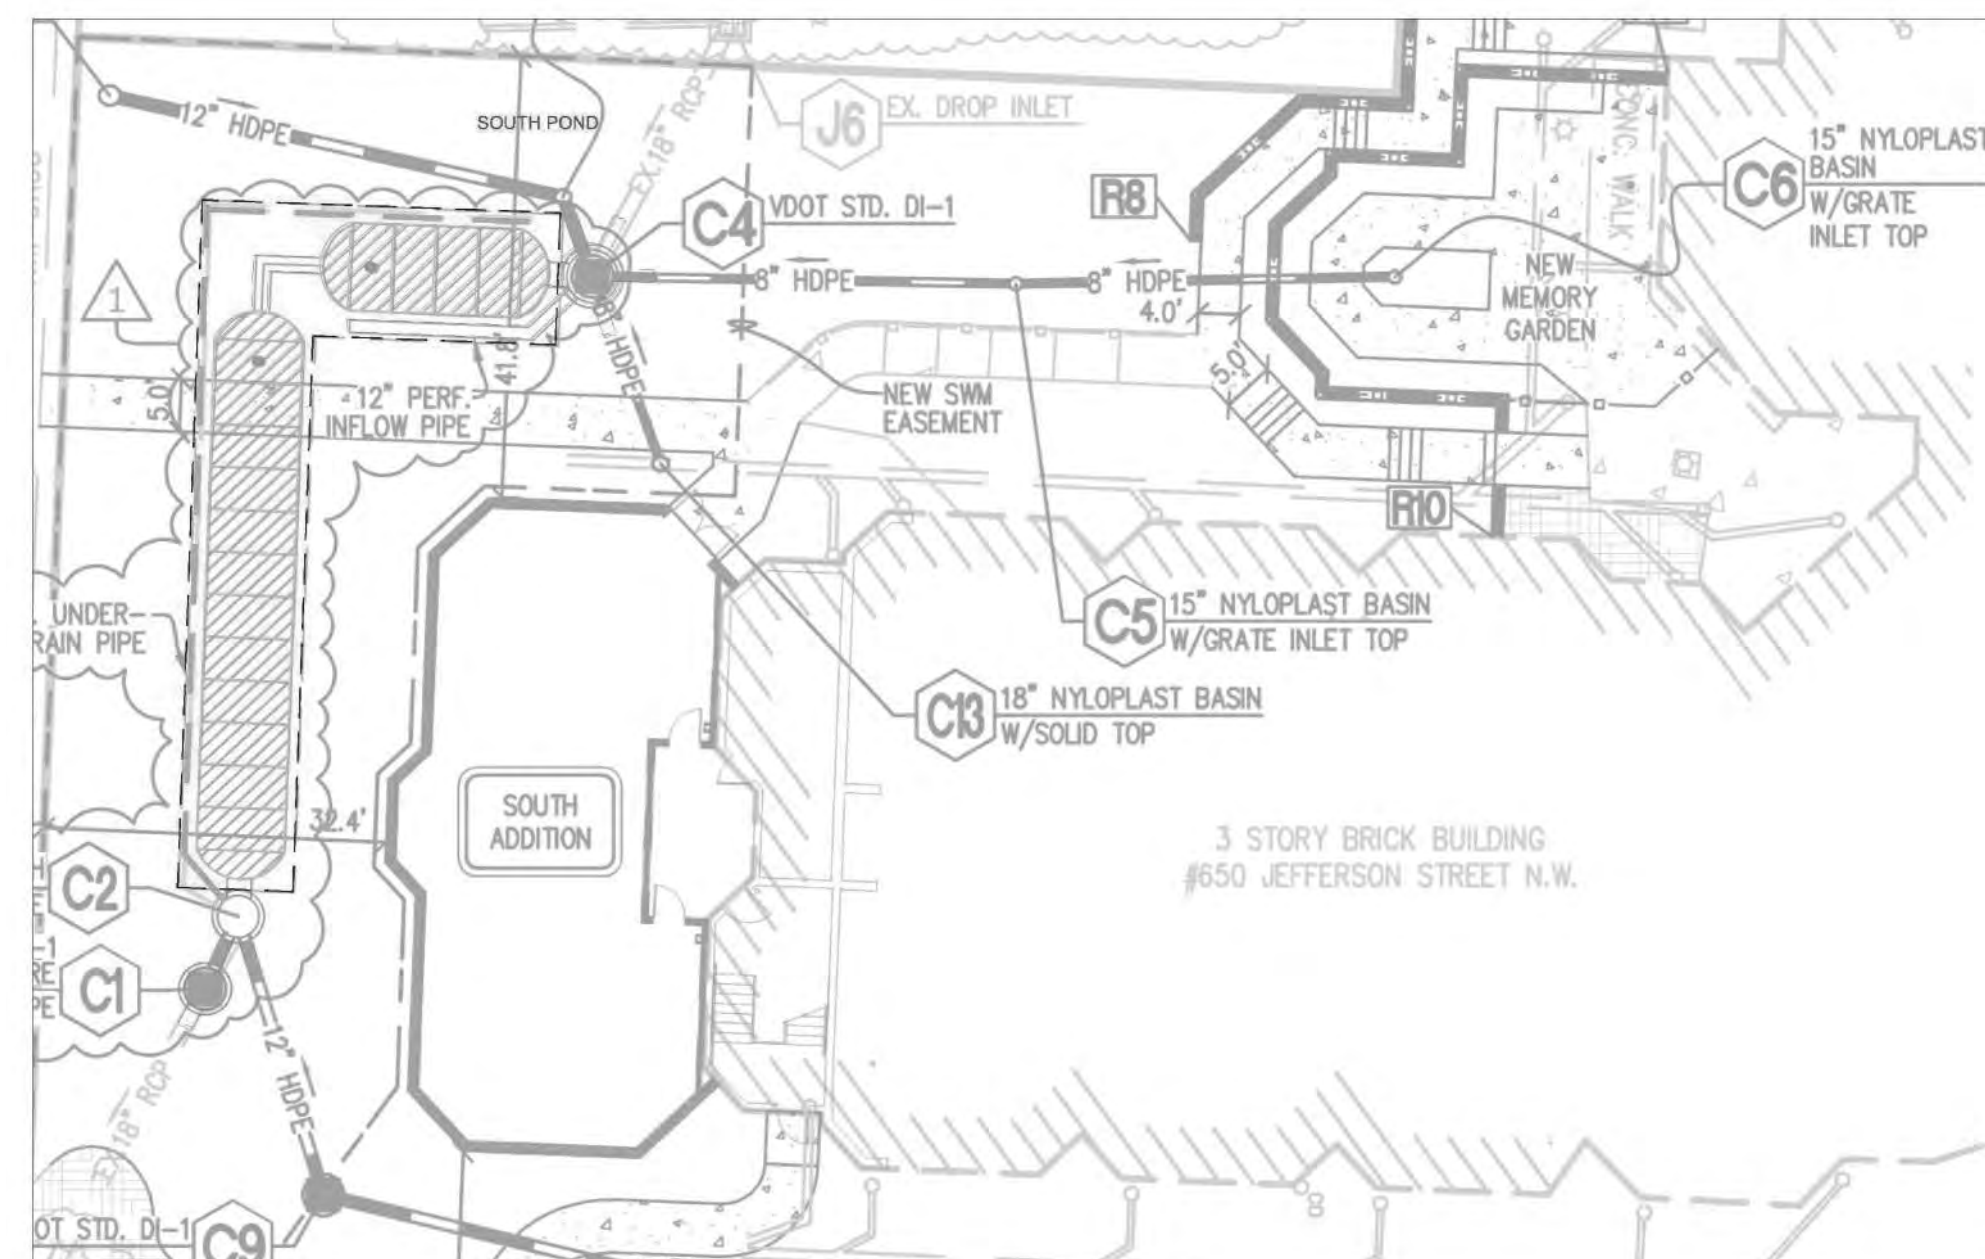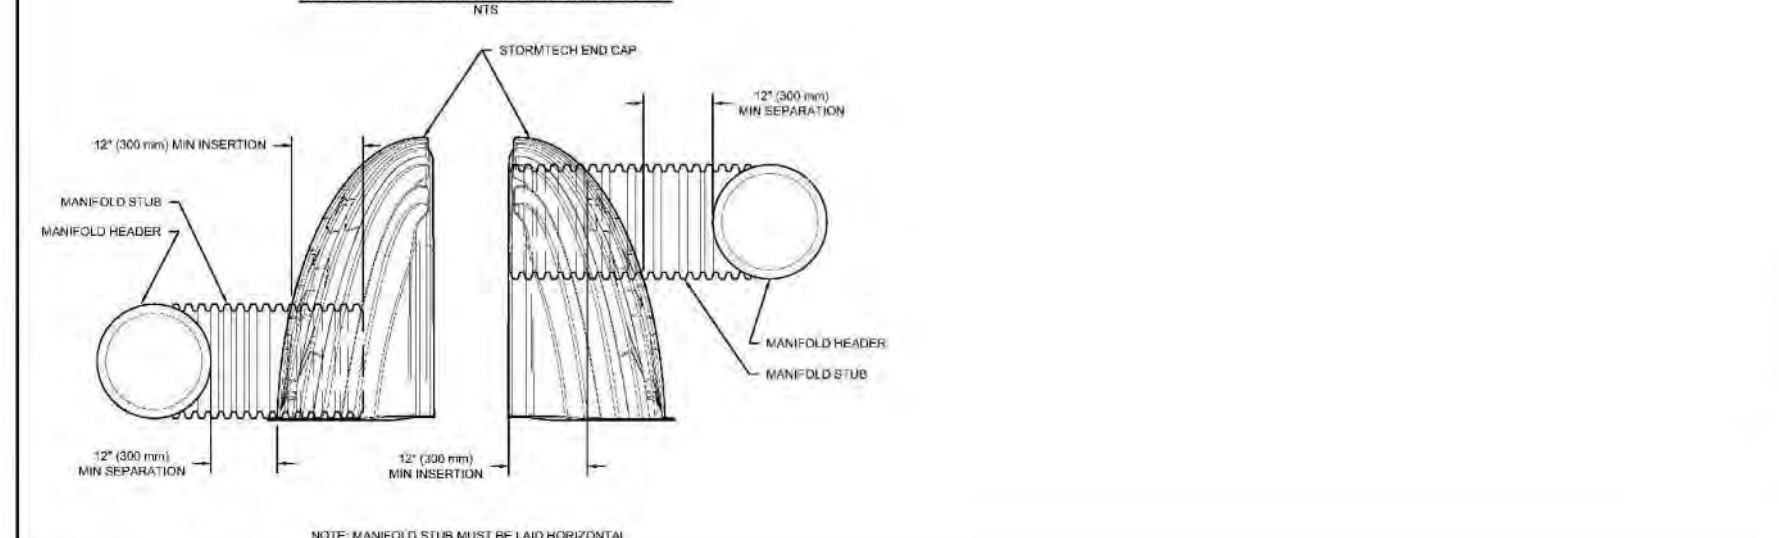

City of Roanoke  
Planning, Building, & Development  
COMPREHENSIVE DEVELOPMENT PLAN

---

**FIELD REVISION**  
**APPROVED**

by Aaron Cypher      04/23/2020

REVISIONS		DESCRIPTION
NO.	DATE	
1	4/20/20	STORMWATER MANAGEMENT - STORMTECH SYSTEM
2		
3		
4		
5		

DATE: February 7, 2020

SCALE: AS SHOWN

COMMISSION NO: 19-191

**SHEET 12A OF 13**