


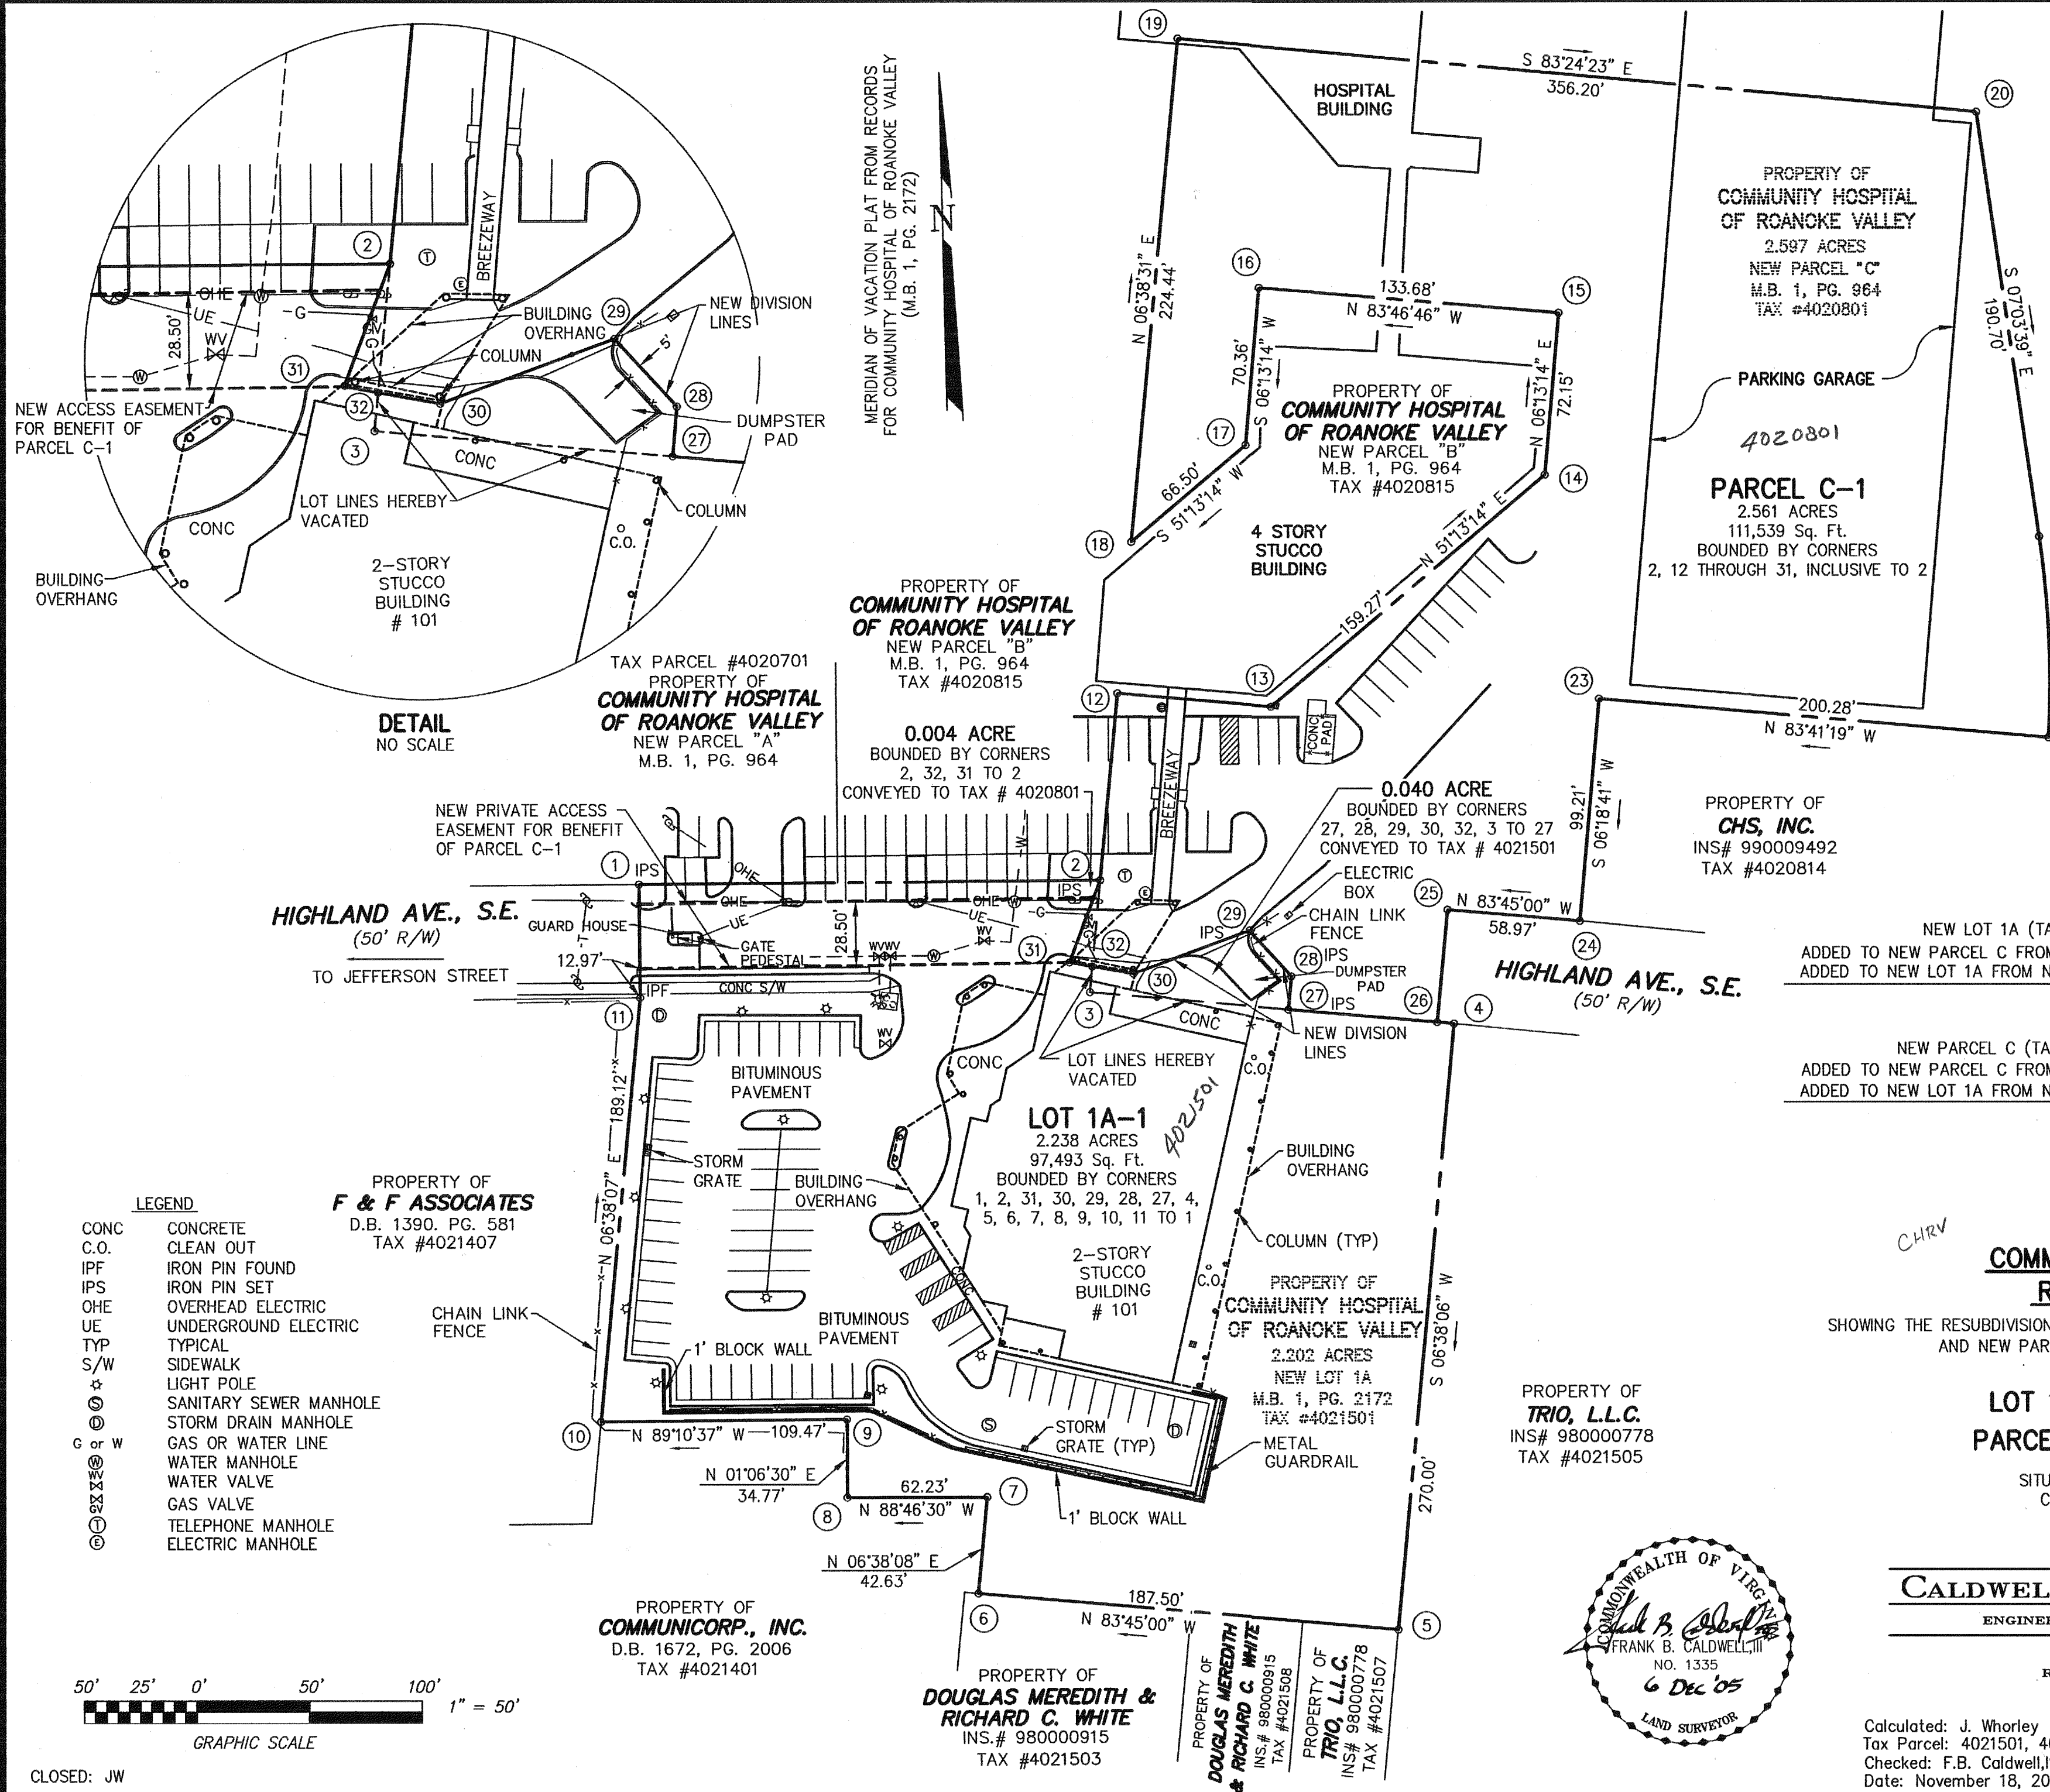

LINE TABLE		
LINE	BEARING	DISTANCE
1-2	S 89°07'20" E	205.38'
2-3	S 06°38'31" W	49.81'
3-4	S 83°45'00" E	162.50'
3-27	S 83°45'00" E	88.66'
27-4	S 83°45'00" E	73.84'
2-12	N 06°38'31" E	83.53'
12-13	S 83°46'46" E	68.58'
25-26	S 06°38'31" W	50.00'
26-27	N 83°45'00" W	66.34'
27-28	N 06°15'00" E	14.84'
28-29	N 41°23'13" W	27.32'
29-30	S 71°00'36" W	55.06'
30-31	N 78°37'07" W	28.95'
31-2	N 21°55'18" E	38.90'
11-1	N 00°46'04" E	50.24'
26-4	S 83°45'00" E	7.50'

WILLIAMSON ROAD, S.E.
(VARIABLE R/W)

21 to 22
DELTA=11°33'44"
RAD=442.96'
TAN=44.85'
ARC=89.39'
CHORD=S 01°16'47" E
89.24'