


ROANOKE COUNTY PUBLIC SERVICE AUTHORITY

ROANOKE COUNTY, VIRGINIA PROJECT NO. 76-1-S

AUTHORITY MEMBERS

L.S. WALDROP CHAIRMAN
R.H. RICHARDSON
B.W. MAHONEY
E.G. BOWMAN
L.S. ELDER

W.L. ROSSIE JR. EXECUTIVE DIRECTOR

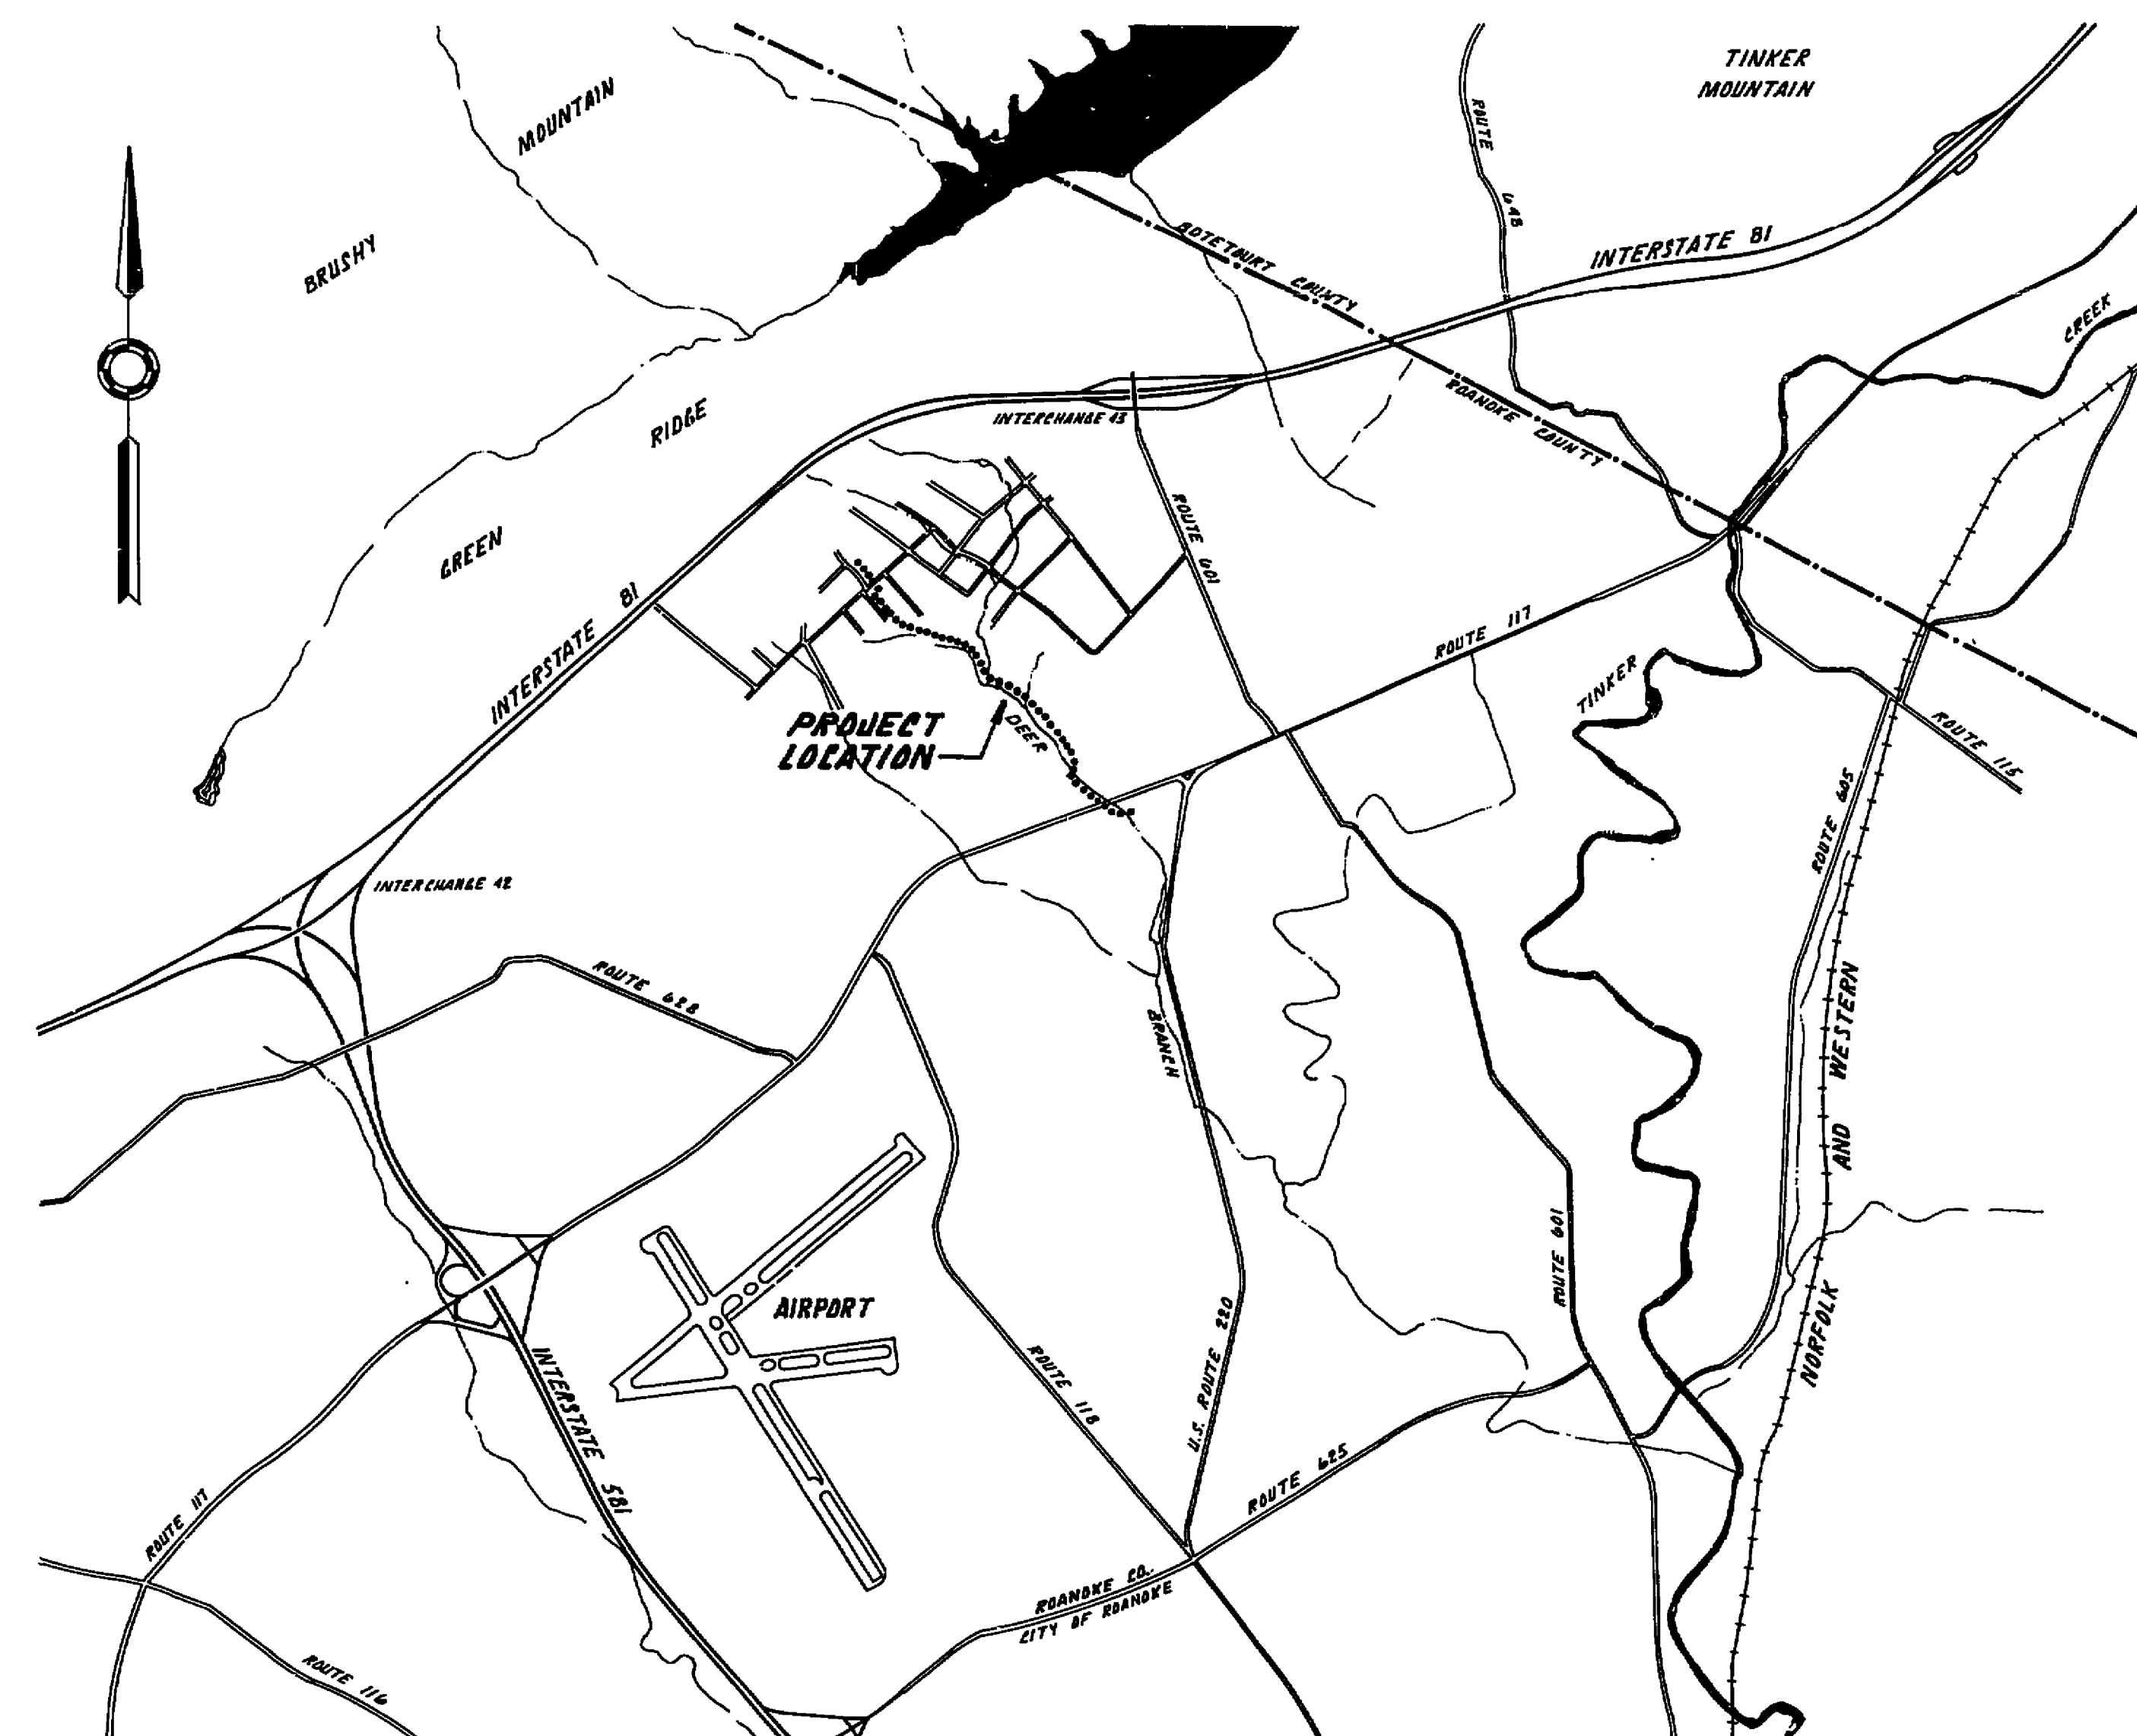


SUMMARY OF QUANTITIES			
ITEM	DESCRIPTION	QUANTITY	UNIT
1	15-INCH SANITARY SEWER PIPE, IN PLACE	2,965	L. F.
2	9-INCH SANITARY SEWER PIPE, IN PLACE	2,568	L. F.
3	ST'D. MANHOLES, TYPE "A", IN PLACE	22	E. A.
4	HIGHWAY CROSSING, COMPLETE	140	L. F.
5	MISCELLANEOUS CONCRETE	20	C. Y.
6	ROCK EXCAVATION	1,200	C. Y.
7	SELECT FILL MATERIAL	500	C. Y.
8	EXTRA BEDDING MATERIAL	250	C. Y.

LEGEND

- SURVEY BASE LINE
- PROPERTY LINE
- RIGHT OF WAY LINE
- EDGE OF PAVEMENT
- EXISTING SANITARY SEWER
- PROPOSED SANITARY SEWER
- EXISTING MANHOLE
- PROPOSED MANHOLE
- WATER MAIN
- GAS LINE
- ELECTRIC CABLE OR CONDUIT
- TELEPHONE CABLE OR CONDUIT
- RAILROAD TRACKS
- DITCH
- STREAM
- FENCE
- FIRE HYDRANT
- POWER POLE
- TELEPHONE POLE AND GUY WIRE
- VALVE VAULT
- WATER METER
- TREE
- SHRUB
- HEDGE
- ROCK OR STONE WALL
- EXISTING GROUND

SCHEDULE OF DRAWINGS		
SHEET	TITLE	STATION
1	INDEX SHEET	
2	DEER BRANCH INTERCEPTOR	10+53 - 24+00
3	DEER BRANCH INTERCEPTOR	24+00 - 39+00
4	DEER BRANCH INTERCEPTOR	39+00 - 54+00
5	DEER BRANCH INTERCEPTOR	54+00 - 65+86
6	DETAIL SHEET	

LANGLEY, McDONALD AND OVERMAN
CONSULTING ENGINEERS
NORFOLK, VIRGINIA
[REVISED BY ROANOKE COUNTY] DEC. 10, 1976

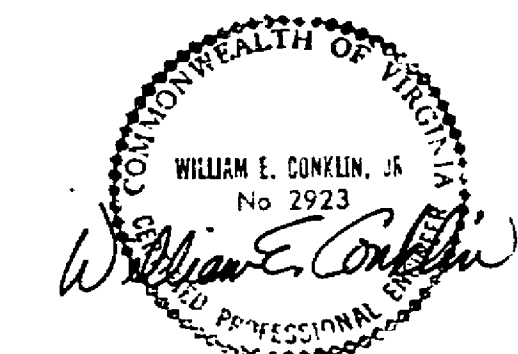

SANITARY SEWERAGE SYSTEM DEER BRANCH INTERCEPTOR

JANUARY 1976

SI-0621

6103

