

# DEVELOPMENT PLANS FOR DEERFIELD ESTATES

SITUATED IN  
CITY OF ROANOKE, VIRGINIA  
DATE: 27 APRIL 2001

NOTICE:  
All Landowners, Developers and Contractors


FAILURE TO COMPLY WITH THE CONSTRUCTION PROCEDURE REQUIREMENTS  
LISTED BELOW MAY RESULT IN THE COSTLY REMOVAL OF STRUCTURES, TIME  
DELAYS, OR THE ISSUANCE OF A STOP WORK ORDER.

#### CONSTRUCTION PROCEDURE REQUIREMENTS

1. City inspections: To ensure the coordination of timely and proper inspections, a preconstruction conference shall be initiated by the contractor with the Planning and Community Development. Call 703-981-2250 to arrange a conference at least three (3) days prior to anticipated construction.
2. Street opening permit: Prior to the commencement of any digging, alteration, or construction within the public right-of-way (streets, alleys, public easements) a street opening permit shall be applied for and obtained by the contractor from the City of Roanoke.
3. Plans and permits: A copy of the plans approved by the city (signed by the proper City officials) and all permits issued by the City shall be available at the construction site at all times of ongoing construction.
4. Location of utilities: The contractor shall verify the location of all existing utilities prior to the commencement of any construction.
5. Construction entrance: The contractor shall install an adequate construction entrance for all construction-related egress from the site. Size and composition of construction entrance shall be determined by the City site plan inspector.
6. Streets to remain clean: It shall be the responsibility of the contractor to insure that the public street adjacent to the construction entrance remains free of mud, dirt, dust, and/or any type of construction materials or litter at all times.
7. Barricades/ditches: The contractor shall maintain the integrity of all excavated ditches and shall furnish and ensure that all barricades proper and necessary for the safety of the public are in place.
8. Sewer and pavement replacement: Construction of sanitary sewers and the replacement of pavement shall be in accordance with approved standards and specifications of the City of Roanoke.
9. Approved plans/construction changes: Any change or variation from construction design as shown on the officially approved plans shall be approved by the City Engineer prior to said changes or variations in construction being made.
10. Final acceptance/city: The developer or contractor shall furnish the city of Roanoke engineering department with a final correct set of as-built plans prior to final acceptance by the City.

PREPARED FOR

MICHAEL D. HENDERSON

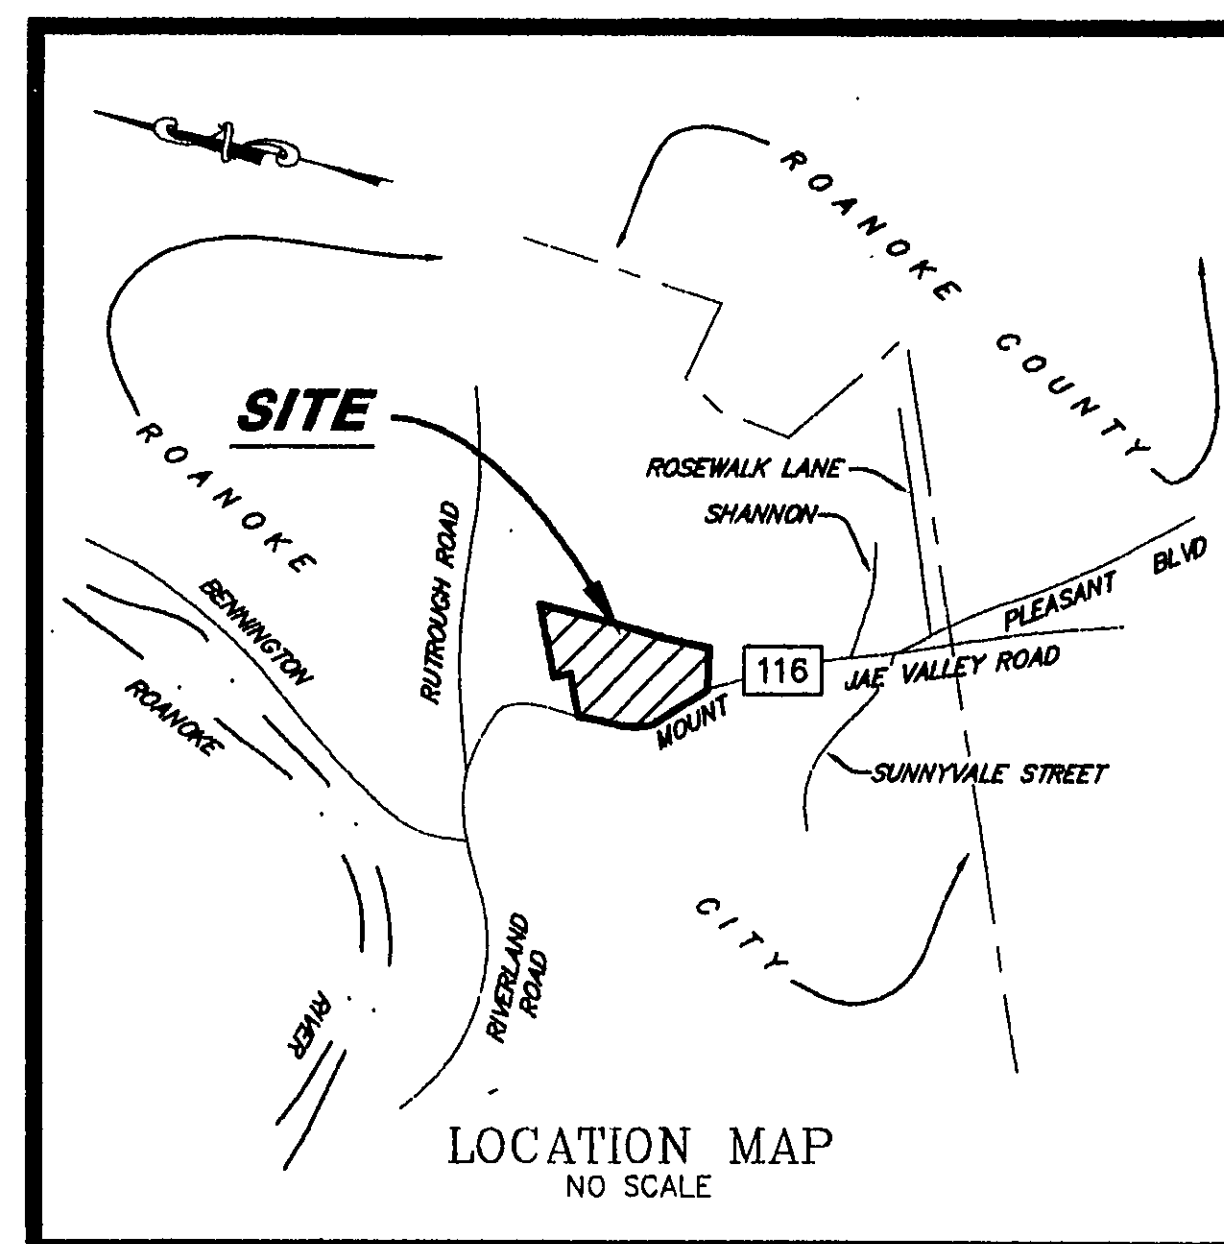


#### INDEX OF DRAWINGS

SHEET No.	DESCRIPTION
-----------	-------------

- |    |   |
|----|---|
| 1. | LUMSDEN ASSOCIATES COVER SHEET              |
| 2. | RECORD MAP                                  |
| 3. | NOTES & DETAILS                             |
| 4. | DIMENSIONAL LAYOUT, UTILITIES & LANDSCAPING |
| 5. | GRADING & DRAINAGE PLAN                     |
| 6. | PROFILES                                    |
| 7. | EROSION AND SEDIMENT CONTROL PLAN           |
| 8. | EROSION AND SEDIMENT CONTROL DETAIL SHEET   |
| 9. | CONSTRUCTION SPECIFICATIONS                 |

LUMSDEN ASSOCIATES, P.C.  
ENGINEERS-SURVEYORS-PLANNERS  
ROANOKE, VIRGINIA

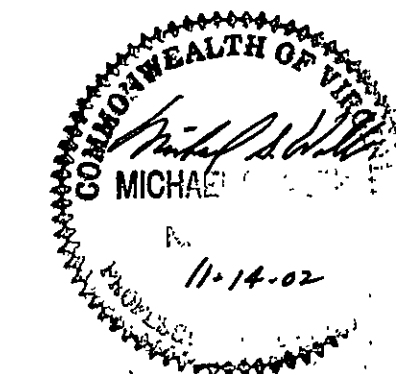

DEVELOPMENT PLAN APPROVED	
Agent, Planning Commission	<i>[Signature]</i> 11/15/02
Development Engineer	<i>[Signature]</i> 11/15/02
Zoning Administrator	<i>[Signature]</i> 11-15-02
Any changes to this approved plan must be coordinated with the Agent to the Planning Commission and revisions approved prior to construction.	

RECEIVED

NOV 14 2002

CITY OF ROANOKE  
PLANNING BUILDING AND DEVELOPMENT

REVISIONS			
DATE	SHEETS	DATE	SHEETS