

QUANTITY & COST ESTIMATE

ITEM	QUANTITY	UNIT	UNIT PRICE	COST	BONDABLE
CLEARING AND GRUBBING		ACRES			
EXCAVATION		C.Y.			
EMBANKMENT		C.Y.			
CURB INLET DI- 3B	1	EACH	800.00	800.00	
INLET DI- 7 TYPE III GRATE	1	EACH	900.00	900.00	
INLET DI-1	4	EACH	800.00	3,200.00	
INLET SHAPING -IS-1	4	EACH	250.00	1,000.00	
MANHOLET MH-2 (R-1,2,3 & B-1,2)	6	EACH	900.00	5,400.00	
MANHOLET MH-2 W/DI-1 INSLAB TOP	2	EACH	1,000.00	2,000.00	
15" CONCRETE PIPE	435	LIN. FT.	1,500.00	6,525.00	
18" CONCRETE PIPE	438	LIN. FT.	1,800.00	7,884.00	
36 -IN CONCRETE PIPE, CLASS III	698	LIN FT	36.00	25,128.00	
30 -IN CONCRETE PIPE, CLASS III	180	LIN FT	30.00	5,400.00	
24 -IN. CONCRETE PIPE, CLASS III	112	LIN. FT.	24.00	2,688.00	
18 -IN CM CULVERT	68	LIN. FT	15.00	1,020.00	
15 IN CM CULVERT	12	LIN FT	12.00	144.00	
BOX CULVERT		LUMP SUM			
GRAVEL DITCH		LIN FT			
GRAP - CLASS (SEE STORM WATER NOT.)		S.F			
GRAVEL SWALE		S.Y			
36 -IN CONCRETE ENDWALL EW-		EA			
36 -IN END SECTION ES-1	1	EA.	575.00	575.00	
18 -IN. END SECTION ES-1	1	EA.	290.00	290.00	
DRIVEWAY, ENTRANCE TYPE		EACH			
SIDEWALK, - FT WIDE		LIN FT			
TRAIL, - FT WIDE		LIN. FT.			
HEADER CURB & GUTTER CG-2	1,780	LIN FT	5.00	8,900.00	
CURB & GUTTER CG-6	310	LIN. FT.	7.00	2,170.00	
VALLEY GUTTER		EA			
GRAVEL BASE		S.Y			
GRAVEL SHOULDER		S.Y			
SURFACE TREATMENT		S.Y.			
6 -IN BIT CONC. TYPE B-3	350	S.Y	23.00	8,050.00	
1 1/2 -IN BIT CONC. TYPE S-5	350	S.Y.	6.00	2,100.00	
6 -IN BASE MATERIAL	60	C.Y	40.00	2,400.00	
-IN SUBBASE MATERIAL		CY			
STREET SIGNS		EA			
TRAFFIC BARRICADE		EA.			
PIPES AS SHOWN ON PLAT		EA			
MONUMENTS AS SHOWN ON PLAT		EA			
8 -IN WATER LINE	665	LIN FT	16.25	10,806.00	
-IN WATER LINE		LIN FT			
-IN WATER LINE		LIN. FT.			
FIRE HYDRANT ASSEMBLIES	2	EA.	1,500.00	3,000.00	
BLOW OFFS W/VAULT, FRAME & COVER		EA.			
6 -IN GATE VALVES W/VAULT, FRAME & COVER	1	EA.	750.00	750.00	
8 -IN GATE VALVES W/VAULT, FRAME & COVER	1	EA	900.00	900.00	
-IN GATE VALVES W/VAULT, FRAME & COVER		EA.			
SERVICE CONNECTIONS		EA.			
8 -IN SAN. SEWER	880	LIN. FT	14.00	12,320.00	
-IN SAN. SEWER		LIN FT.			
-IN SAN. SEWER		LIN FT			
STD. MANHOLE W/FRAME & COVER	6	EA.	800.00	4,800.00	
SERVICE CONNECTIONS W/ CLEANOUTS		EA.			
LANDSCAPING		LUMP SUM	-	3,050.20	
AS-BUILT PLANS		LUMP SUM			
STORM WATER MANAGEMENT		LUMP SUM	-	9,995.00	
ESTIMATED TOTAL				32,195.00	

I hereby certify that the foregoing estimate reflects the current improvement costs of this project

Signed:

Date:

GENERAL NOTES

All construction methods and materials shall conform to the Construction Standards and Specifications of Roanoke County and/or The Virginia Department of Highways and Transportation.

The contractor or developer is required to notify the Roanoke County Engineering Division in writing at least three (3) days prior to any construction, including but not limited to the following:

- Installation of approved erosion control devices.
- Clearing and grubbing.
- Subgrade excavation.
- Installing storm sewers or culverts.
- Setting curb and gutter forms.
- Placing curb and gutter.
- Placing other concrete.
- Placing gravel base.
- Placing any roadway surface.
- Installing water lines.
- Installing sanitary sewer lines.

A preconstruction conference should be scheduled with the Roanoke County Engineering Division, to be held at least one day prior to any construction.

Measures to control erosion and siltation must be provided prior to plan approval. Plan approval in no way relieves the developer or contractor of the responsibilities contained in erosion and siltation control policies.

A permit must be obtained from the V.D.H.&T. Residency Office, Roanoke County, prior to construction in the highway Right-of-Way.

Plan approval does not guarantee issuance of any permits by V.D.H.&T.

An approved set of plans and all permits must be available at the construction site.

Field construction shall honor proposed drainage divides as shown on plans.

All unsuitable material shall be removed from the construction limits of the roadway before placing embankment.

Pavement sections on approved plans are based on a min. CBR of 10. CBR tests are to be performed by the engineer and submitted to the V.D.H.&T. and to the Roanoke County Engineering Division prior to placement. CBR values < 10 will require revised pavement sections.

All roadside ditches or grades of more than 5% shall be paved with cement concrete to the limits indicated on the plans and as required at the field inspection.

Location of guard rails shall be determined at a joint field inspection by the county and the V.D.H.&T.

All springs shall be capped and piped to the nearest storm sewer or natural water course. The pipe shall be 6" min dia. and conform to V.D.H.&T. standard SB-1.

Standard street and traffic control signs shall be erected at each intersection by the developer prior to final street acceptance.

Construction debris shall be containerized in accordance with the Virginia Litter Control Act. No less than one litter receptacle shall be provided on site.

The contractor shall provide adequate means of cleaning mud from trucks and/or other equipment prior to entering public streets. It is the contractors responsibility to insure that the streets are in a clean, mud and dust free condition at all times.

The developer and/or contractor shall supply all utility companies with copies of approved plans, advising them that all grading and installation shall conform to approved plans.

Contractors shall notify utilities of proposed construction at least two, but not more than ten working in advance. Area public utilities may be notified thru Miss Utility (800) 552-7001.

The developer or contractor shall supply the county with correct As-Built plans before final acceptance.

All work shall be subject to inspection by Roanoke County and/or V.D.H.&T. inspectors.

Field corrections shall be approved by the Roanoke County Engineering Division prior to such construction.

100 year floodway and flood plain shall be shown where applicable.

Grade stakes shall be set for all curb & gutter, culvert, sanitary sewer and storm sewer.

SURVEY INFORMATION


Horizontal and vertical control surveys were performed in year 1987 by BUFORD T. LUMSDEN & ASSOCIATES, P.C.

All elevations must be referenced to the National Geodetic Vertical Datum of 1929

Source of topographic mapping is BUFORD T. LUMSDEN & ASSOCIATES, P.C. dated 1987


Boundary survey was performed by BUFORD T. LUMSDEN & ASSOCIATES, P.C. dated 1987

The professional seal and the signature below certifies the boundary survey and topographic mapping to be accurate and correct.

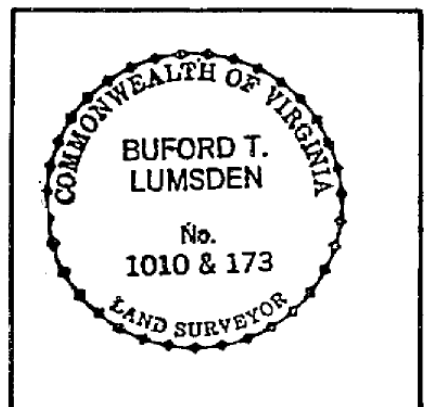

PROFESSIONAL SEAL AND SIGNATURE

LEGEND

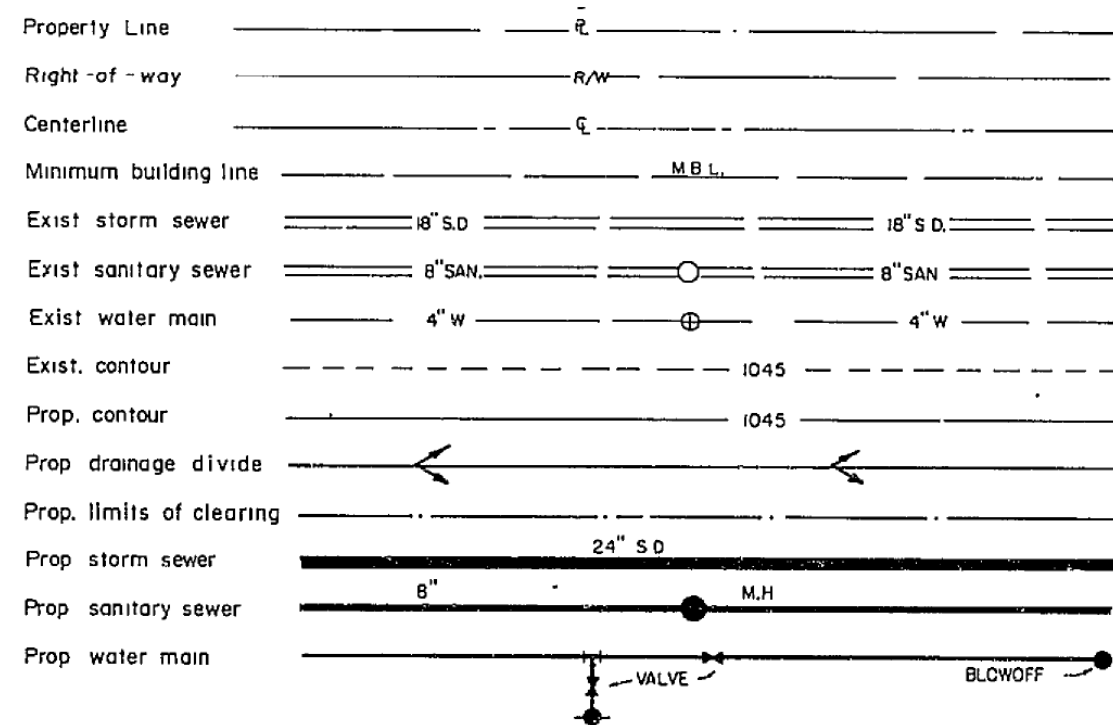

WATER NOTES

A minimum cover of Three (3) feet is required over proposed lines.

Contractor shall be responsible for locating and uncovering valve vaults after paving and adjustment to final grade if necessary.

All existing utilities may not be shown or may not be shown the exact location. The contractor shall comply with State Water Works Regulations, Section 12.05.03, where lines cross.

All trenches in existing or future highway right of ways shall be compacted according to V.D.H. & T. standards.

Lines shall be staked prior to construction.

SEWER NOTES

A minimum cover of three(3) feet is required over proposed lines.

Contractor shall be responsible for locating and uncovering all manholes after paving. Manhole tops shall be adjusted to grade if necessary.

All existing utilities may not be shown or may not be shown the exact location. The contractor shall comply with State Water Works Regulations, Section 12.05.03, where lines cross.

House connections are to be made with 4" pipe installed on a minimum grade of 1/4 inch to 1 foot in R/W.

Laterals from manholes shall be PVC or Ductile Iron of sufficient length to provide two (2) feet of bearing on natural ground. The transition from ductile iron to asbestos cement or concrete pipe shall be made with an adapter coupling in R/W.

All trenches in existing or future highway right of ways shall be compacted according to V.D.H. & T. standards.

Lines shall be staked prior to construction.



COUNTY OF ROANOKE

NAME OF DEVELOPMENT **ROANOKE HYUNDAI**

MAGISTERIAL DISTRICT(S) **CATAWBA**

OWNER (name, address, telephone) **LEWIS-GIBBS CORPORATION
P.O. BOX 1626
CHESAPEAKE, VA. 23320**

PH.#(804)420-5450

DEVELOPER (name, address, telephone) **SAME**

ENGINEER, ARCHITECT OR SURVEYOR (name, address, phone) **BUFORD T. LUMSDEN & ASSOCIATES, P.C.
P.O. BOX 20669
ROANOKE, VA. 24018**

PH.#(703)774-4411

TAX MAP NO(S) **27.13**

BLOCK NO(S) **4**

PARCEL NO(S) **1**

Sheet **2** of **10**

*88-5416

