

9/20/05 - Talked w/
Jamir - we will
allow an outside drop
into the existing MH.

RE

W

N

I

Engineering
Architecture
Surveying

ERDMANN SEWER LINE
ROANOKE, VIRGINIA


ERDMANN SEWER LINE

[illegible]

COMMONWEALTH OF
MASSACHUSETTS
RICHARD C.
WHITE
NO. 020021
4-6-05
PROFESSIONAL ENGINEER

Designed By	W
Drawn By	W
Checked By	R
Approved By	R
Submitted By	R
Drawing	29975
Date	03/
Scale	HORZ VERT
Commission No.	29

Sheet 1 of

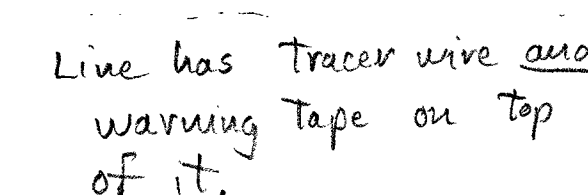

GENERAL NOTES:

1. ALL DIMENSIONS SHALL BE VERIFIED IN THE FIELD. ANY SUBSTANTIAL DEVIATION FROM DIMENSIONS GIVEN ON THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER, IN WRITING, PRIOR TO THE START OF WORK.
2. THE EXISTENCE AND LOCATION OF UNDERGROUND UTILITIES ARE NOT GUARANTEED AND SHALL BE INVESTIGATED AND FIELD VERIFIED BY THE CONTRACTOR BEFORE STARTING WORK. ANY DAMAGE DONE TO EXISTING UNDERGROUND UTILITIES AND FACILITIES SHALL BE REPAIRED WITH THE UTILITIES AND FACILITIES RESTORED TO AT LEAST THEIR ORIGINAL CONDITION. THE CONTRACTOR SHALL BEAR ALL COSTS ASSOCIATED WITH THESE REPAIRS.
3. SHOULD ANY UNCHARTED OR INCORRECTLY CHARTED UTILITIES BE ENCOUNTERED, THE CONTRACTOR SHALL CONTACT THE OWNERS ENGINEER IMMEDIATELY FOR DIRECTION.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL TEMPORARY TRAFFIC CONTROL DEVICES REQUIRED DURING CONSTRUCTION, INCLUDING BUT NOT LIMITED TO, BARRICADES, LIGHTING, FLAG MEN, WARNING BEACONS AND NECESSARY SIGNAGE. IN ADDITION, THE CONTRACTOR SHALL WORK WITH THE VDOT TO DEVELOP AND PROVIDE A PROPOSED SCHEDULE OF STREET CLOSURES AND DETOURS.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING ALL NON-PUBLIC UTILITY ACCESS PANS OR COVERS TO MATCH WITH THE GAS WATER, SEWER, SANITARY SEWER MANHOLES, STORM DRAIN MANHOLES, DROP INLETS, CLEAN OUTS, ANY ANY OTHER SUCH ELEMENTS, TO MEET FLUSH WITH NEW FINISH GRADES.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE RAISING OR LOWERING OF ALL PUBLIC UTILITY ACCESS PANS OR METERS WITH THE GAS COMPANY, ELECTRIC COMPANY, TELEPHONE COMPANY, AND ANY OTHER SUCH UTILITY COMPANIES, TO MEET FLUSH WITH NEW FINISH GRADES.
7. CONTRACTOR SHALL COORDINATE ANY INTERRUPTION OF UTILITY SERVICE WITH OWNER AND UTILITY COMPANY.
8. ANY PLANNED INTERRUPTION OF UTILITY SERVICE SHALL BE GIVEN AT LEAST SEVEN CALENDAR DAYS NOTICE TO THE OWNER AND THE UTILITY COMPANY.
9. THE CONTRACTOR SHALL NOTIFY ALL PROPERTY OWNERS AND/OR BUSINESSES OF ANY ANTICIPATED DISRUPTION TO UTILITY SERVICES AND ACCESS/EGRESS AT LEAST SEVEN CALENDAR DAYS PRIOR TO DISRUPTION. THE CONTRACTOR SHALL WORK WITH ANY AFFECTED PARTY TO PROVIDE TEMPORARY SERVICES AND SAFE ACCESS/EGRESS.
10. THE CONTRACTOR SHALL NOTIFY MR. GREG REED, WESTERN VIRGINIA WATER AUTHORITY, 1000 WEST VIRGINIA PARKWAY, CHARLESTON, WEST VIRGINIA 25301, PRIOR TO THE START OF CONSTRUCTION.

**CONSTRUCTION PLAN
APPROVED
FOR CONSTRUCTION BY THE
WESTERN VIRGINIA WATER
AUTHORITY**

Approved By:	Date:
<i>[Signature]</i>	5-3-05

LEGEND

—SS— SANITARY SEWER
—W— WATER LINE
—UT— UNDERGROUND TELEPHONE
—G— GAS LINE
—OE— OVERHEAD ELECTRIC
□, UTILITY POLE
Ⓢ SANITARY SEWER MH
Ⓜ WATER MH

