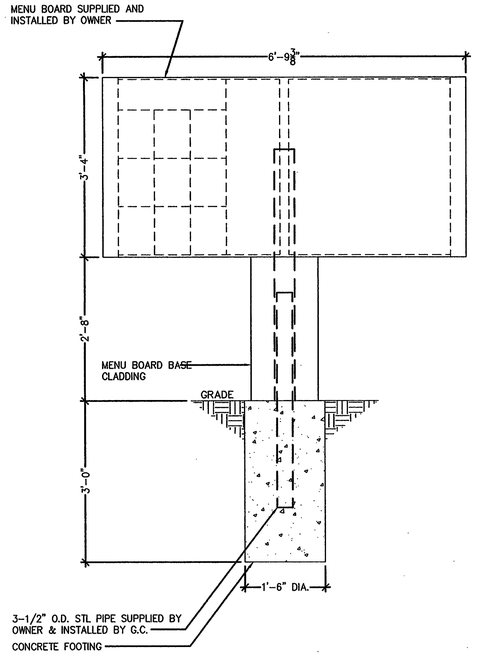

MENU BOARD:
MODEL # S2KD2020

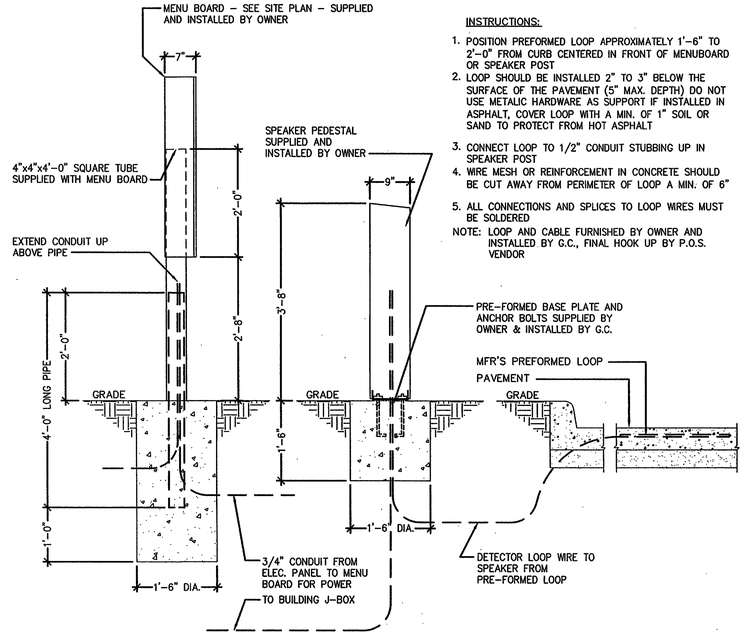

INSTRUCTIONS:

1. POSITION PREFORMED LOOP APPROXIMATELY 1'-6" TO 2'-0" FROM CURB CENTERED IN FRONT OF MENUBOARD OR SPEAKER POST
2. LOOP SHOULD BE INSTALLED 2" TO 3" BELOW THE SURFACE OF THE PAVEMENT (5" MAX. DEPTH) DO NOT USE METALIC HARDWARE AS SUPPORT IF INSTALLED IN ASPHALT, COVER LOOP WITH A MIN. OF 1" SOIL OR SAND TO PROTECT FROM HOT ASPHALT
3. CONNECT LOOP TO 1/2" CONDUIT STUBBING UP IN SPEAKER POST
4. WIRE MESH OR REINFORCEMENT IN CONCRETE SHOULD BE CUT AWAY FROM PERIMETER OF LOOP A MIN. OF 6"
5. ALL CONNECTIONS AND SPLICES TO LOOP WIRES MUST BE SOLDERED

NOTE: LOOP AND CABLE FURNISHED BY OWNER AND INSTALLED BY G.C., FINAL HOOK UP BY P.O.S. VENDOR

SPEAKER PEDESTAL:
MODEL # S2KD1050, MODEL # S2KD1025, MODEL # S2KD1060, OR MODEL # S2KD1070 - COORDINATE WITH POS VENDOR TO SELECT APPROPRIATE MODEL

NOTE: SEE SITE PLAN FOR EXACT LOCATION (IF USED) SEE SHEET E-1 FOR WIRING.

07 DRIVE-THRU MENU BOARD & SPEAKER PROFILE
SCALE: 3/4"=1'-0"

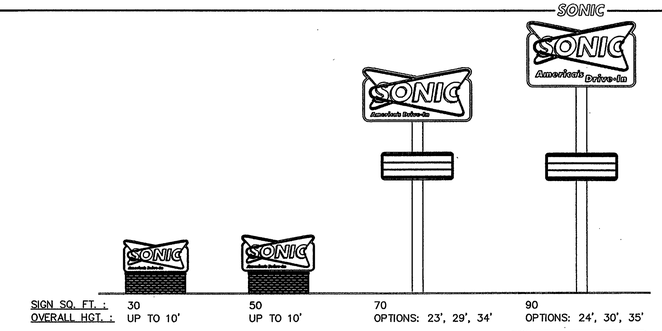

GC TO VERIFY SIZE TYPE OF SIGN WITH OWNER'S REPRESENTATIVE. SIGN COMPANY IS RESPONSIBLE FOR COMPLETE SIGN INSTALLATION INCLUDING FOUNDATIONS. GC TO ONLY PROVIDE/INSTALL ELECTRICAL SERVICE TO SIGN BASE AND ANY MASONRY SKIRT/BASE AS SHOWN INCLUDING ANY REQUIRED FOUNDATION FOR SKIRT/BASE.

SEE SITE PLAN FOR LOCATION(S) (IF USED)

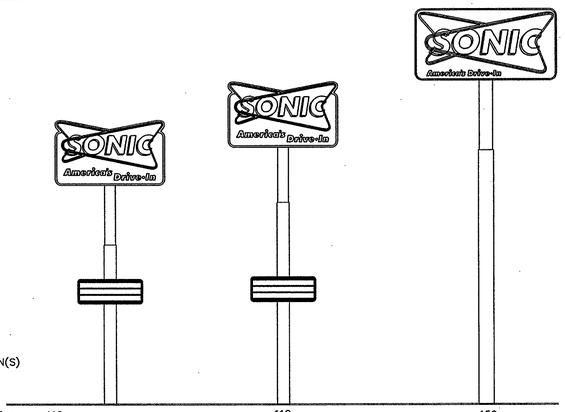

11 MONUMENT / PYLON FAMILY OF SIGNS
NOT TO SCALE

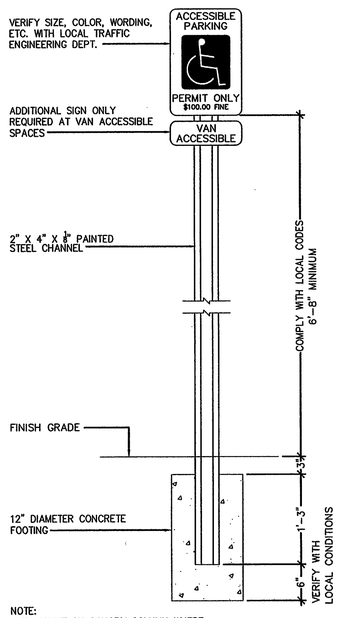

NOTE:
ALT. MOUNT ON CANOPY COLUMN WHERE ALLOWED BY CODE.

19 HANDICAP SIGN
SCALE: 1"=1'-0"

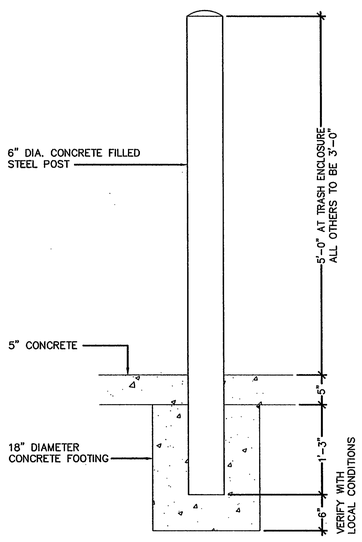

20 BOLLARD
SCALE: 1"=1'-0"

NOTE: THIS PLAN IS GENERIC. REF. CIVIL DRAWING FOR EXACT BUILDING / DRIVE-THRU LAYOUT.

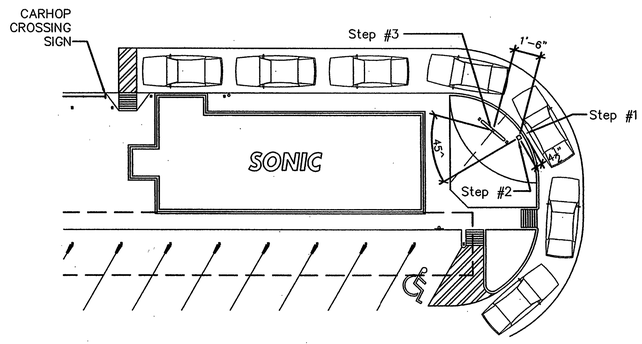

GUIDELINES FOR LOCATION OF DRIVE-THRU MENU BOARD AND SPEAKER PEDESTAL

1. MARK ON THE CURB A POINT EVEN WITH THE DRIVER'S WINDOW ON THE FIFTH CAR IN THE DRIVE-THRU LANE (APPROXIMATELY 90' OF CURB LENGTH FROM THE FRONT OF THE DRIVE-THRU LANE).
2. ON A LINE PERPENDICULAR TO THE CURB, MARK A POINT 1'-6" BEHIND THE FACE OF THE CURB. THIS WILL BE THE CENTER POINT OF THE SPEAKER PEDESTAL.
3. DRAW A SECOND LINE AT A 45-DEGREE ANGLE TO THE FIRST LINE. MARK A POINT 6'-0" FROM THE CENTER OF THE SPEAKER PEDESTAL. THIS SECOND POINT WILL BE THE CENTER POINT OF THE DRIVE-THRU MENU BOARD.

21 MENU BOARD LAYOUT
NOT TO SCALE

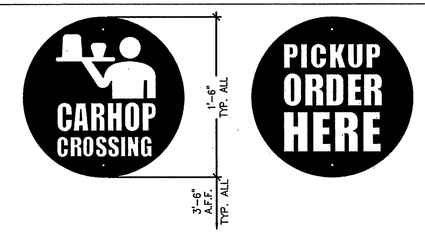

NOTES:
1. ALL LETTERING, GRAPHICS AND LINES TO BE DONE IN REFLECTIVE WHITE ON PANTONE RED 485 BACKGROUND UNLESS NOTED OTHERWISE, TOUCH UP SCREW HEADS WITH PAINT TO MATCH.
2. ALL LETTERING TO BE 2" TALL FUTURA CONDENSED EXTRA BOLD UNLESS NOTED OTHERWISE.
3. IF USED, SEE SITE PLAN FOR LOCATION
4. SUPPLIED BY OWNER, INSTALLED BY G.C.

17 "CARHOP" & "PICK UP ORDER" SIGNAGE
SCALE: 1-1/2"=1'-0"

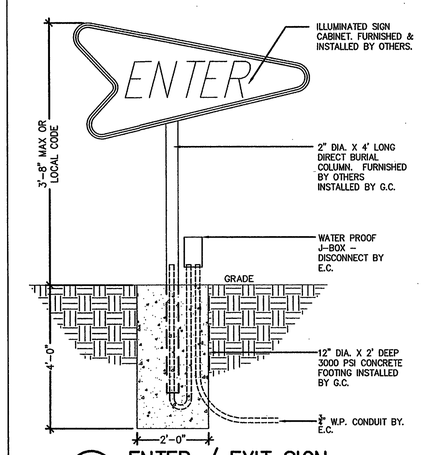

23 ENTER / EXIT SIGN
SCALE: 1/2"=1'-0"

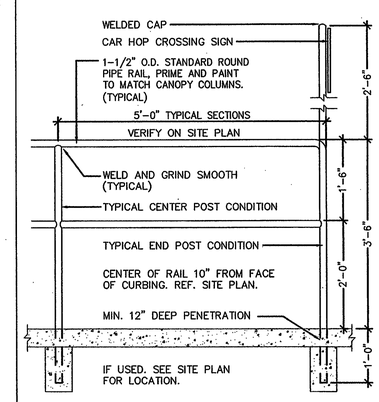

24 RAILING
SCALE: 3/4"=1'-0"

WVWA ID# 6QZQBM

COMMONWEALTH OF VIRGINIA
SHELDON R. BOWER
NO. 030439
6/20/06
PROFESSIONAL ENGINEER

NO	DATE	ISSUES AND REVISIONS	CHECK BY
	02-16-2006	ISSUED FOR PERMIT	

BSW INTERNATIONAL
ONE WEST THIRD STREET, SUITE 800
TULSA, OKLAHOMA 74103
(918) 582-8771

ARCHITECT
ARCHITECT OF RECORD

SONIC CORPORATION
300 JOHNNY BENCH DR
OKLAHOMA CITY, OK 73104
OFFICES: 405-225-5000
FAX: 405-225-5000

COPYRIGHT 1988- 2006 AMERICA'S DRIVE-IN CORP
THESE DRAWINGS ARE NOT TO BE USED FOR ANY PURPOSE OTHER THAN THE CONSTRUCTION OF THE DRIVE-IN AT THE SPECIFIED LOCATION.

SONIC DRIVE-IN
BUILDING TYPE: 02LRSI
CHALLENGER AVENUE
ROANOKE, VIRGINIA

SITE DETAILS

SHEET
SD2

DWG: 552-SD2