
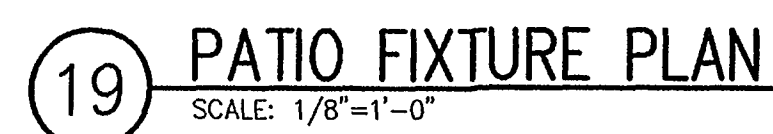


PROVIDE TACTILE SURFACING ON RAMP SURFACES: 1/8" DEEP GROOVES 1/4" - 3/4" WIDE, AND 2" O.C. ARRANGED SO THAT WATER WILL NOT ACCUMULATE

ARCHITECT
ARCHITECT OF RECORD

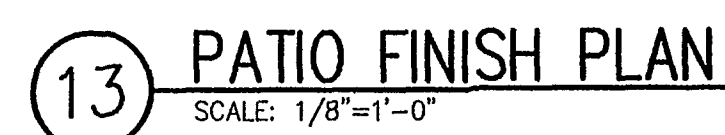

- NOTE:
ALL TRAFFIC FLOW ARROWS TO BE SOLID WHITE
REFLECTIVE TRAFFIC PAINT AS PER DIMENSIONS ABOVE.

23 TRAFFIC FLOW ARROW
SCALE: 1/2"=1'-0"

SONIC DRIVE-IN
BUILDING TYPE: 09
RUTGERS STREET, N.W.
REANOKÉ, VIRGINIA

**SITE DETAILS/ PATIO
FINISH & FIXTURE PLANS**

SHEET
SD 4

DWG.: 552-SD4