





- GENERAL NOTES:
- A. REFER TO SHEET C-503 FOR TYPICAL ROAD/LANE CLOSURE DETAILS AND REQUIREMENTS.
 - B. CONTRACTOR SHALL PROVIDE BY-PASS PUMPING AS PER SPECIFICATIONS.
 - C. REFER TO DETAIL S-3, SHEET C-501 FOR INTERNAL DROPS IN MANHOLE.

- SPECIFIC NOTES:
- 1 THIS SECTION OF SEWER MAIN FROM SMH 13-3125.0 TO SMH 13-3107.0 WILL BE LINED UNDER CONTRACT 1A OF THE OVERALL PROJECT. CONTRACTOR'S SHALL COORDINATE EFFORTS RELATIVE TO TIE-INS AT SMH 13-3107.0. SMH 13-3107.0 SHALL BE REPLACED PRIOR TO LINING. COORDINATE WITH CONTRACT 1A CONTRACTOR.

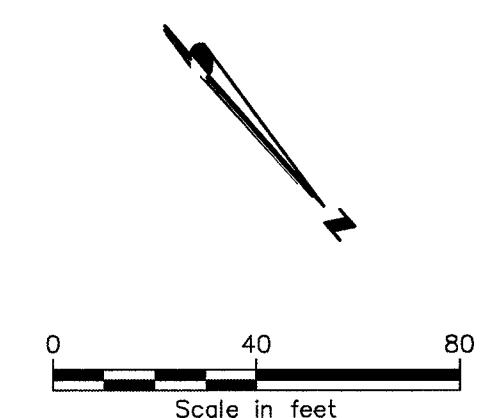

WESTERN VIRGINIA
WATER AUTHORITY

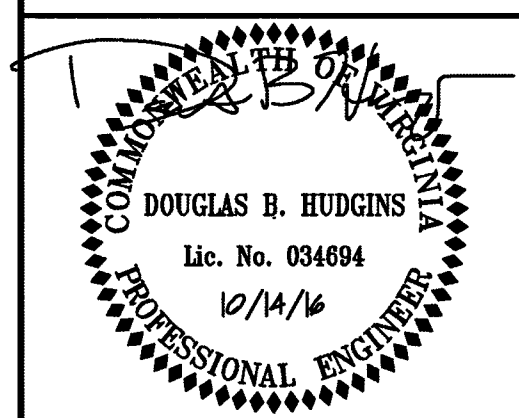

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, ARCHITECT, LANDSCAPE ARCHITECT OR LAND SURVEYOR TO ALTER AN ITEM IN ANY WAY. IF AN ITEM BEARING THE STAMP OF A LICENSED PROFESSIONAL IS ALTERED, THE ALTERING ENGINEER, ARCHITECT, LANDSCAPE ARCHITECT OR LAND SURVEYOR SHALL STAMP THE DOCUMENT AND INCLUDE THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE, THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

WESTERN VIRGINIA
WATER AUTHORITY
CONTRACT 2 - FY16
SANITARY SEWER
REPLACEMENTS


[illegible]

FOREST HILL AVE -
PLAN & PROFILE

Designed By: JRM	Drawn By: GLM	Checked By: DIU
Issue Date: 10-14-16	Project No: 31237	Scale: AS SHOWN

Drawing No.:

C-105

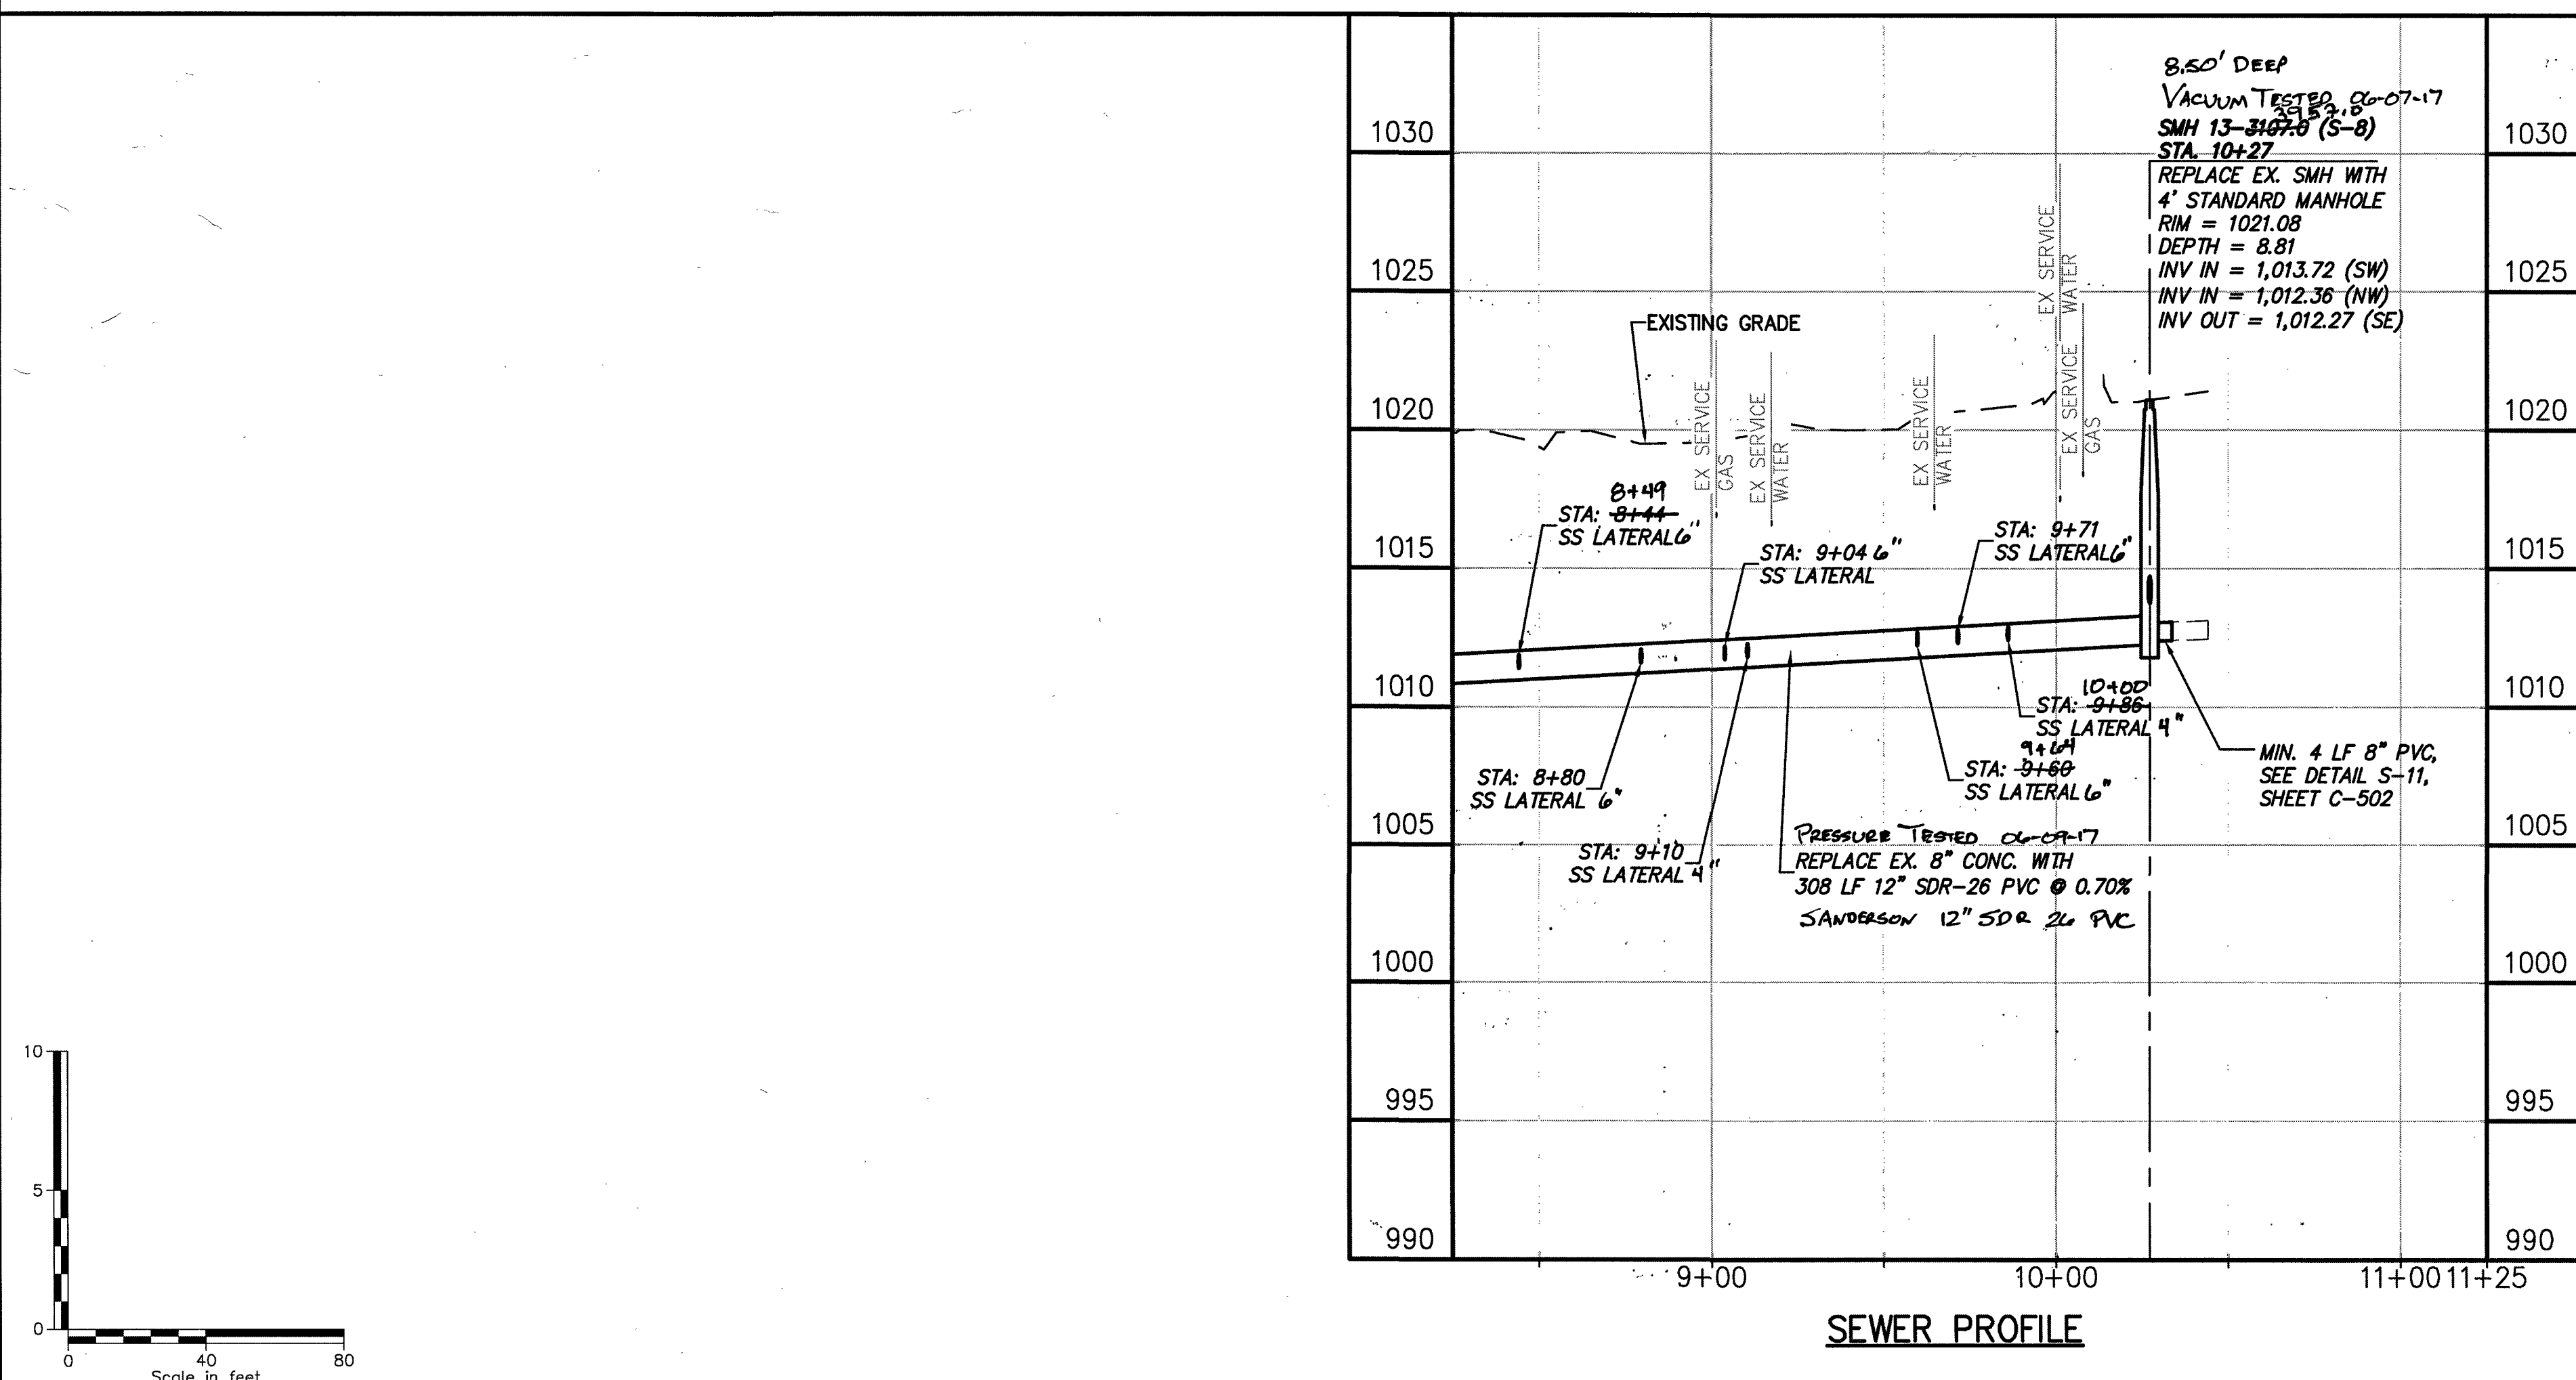

MATERIAL FOR SEWER LATERALS

- NORTH AMERICAN 8" SDR 35 PVC "LAT AT STATION 7454"
- NATIONAL 6" SDR 26 PVC
- SANDERSON 4" SDR 26 PVC

CSI PRE-CAST CONCRETE MANHOLES
U.S. FOUNDARY F&C.