



**BALZER
& ASSOCIATES**
PLANNERS / ARCHITECTS
ENGINEERS / SURVEYORS

Roanoke / Richmond
New River Valley / Staunton
Harrisonburg / Lynchburg
www.balzer.cc

1208 Corporate Circle
Roanoke, VA 24018
540.772.9580



FIELDSTONE PHASE I
OFF-SITE SANITARY SEWER EXTENSION

DRAWN BY: CLL
DESIGNED BY: CPB
CHECKED BY: CPB
DATE: 1/25/2019
SCALE: AS SHOWN


REVISIONS

4/30/2019	
10/8/2019	
12/5/2019	
10/14/2020	
2/11/2021	

C19
PROJECT NO. 04170078.01

EXISTING STRUCTURE SCHEDULE

- | | |
|---|--|
| 1-1 DRAINAGE INLET
TOP=1334.89'
18" CPP N. INV. IN=1329.71'
18" CPP E. INV. IN=1329.75'
18" CPP S. INV. OUT=1329.64' | A SANITARY MANHOLE
TOP=1333.39'
8" PVC INV. IN=1323.67'
8" PVC INV. OUT=1323.69'
SHELF=1324.17' |
| 1-2 DRAINAGE INLET W/ GRATE
TOP=1336.20'
18" CPP INV. OUT=1332.49' | B SANITARY MANHOLE
TOP=1345.18'
8" PVC INV. IN=1332.80' (TRACT A1)
6" PVC INV. IN=1332.70' (TRACT D)
8" PVC INV. IN=1332.66' (LOT 1)
8" PVC INV. IN=1340.09' (R/W)
8" PVC INV. OUT=1332.61'
SHELF=1333.40' |
| 1-3 DRAINAGE INLET
TOP=1344.88'
18" CPP INV. IN=1340.68'
18" CPP INV. OUT=1340.58' | C SANITARY MANHOLE
TOP=1322.41'
8" PVC INV. IN=1314.00'
8" PVC INV. OUT=1313.97'
SHELF=1314.55' |
| 1-4 DRAINAGE INLET
TOP=1345.12'
18" CPP INV. IN=1341.48'
18" CPP INV. OUT=1341.28' | |
| 1-5 18" CPP INV. IN=1343.17' | |

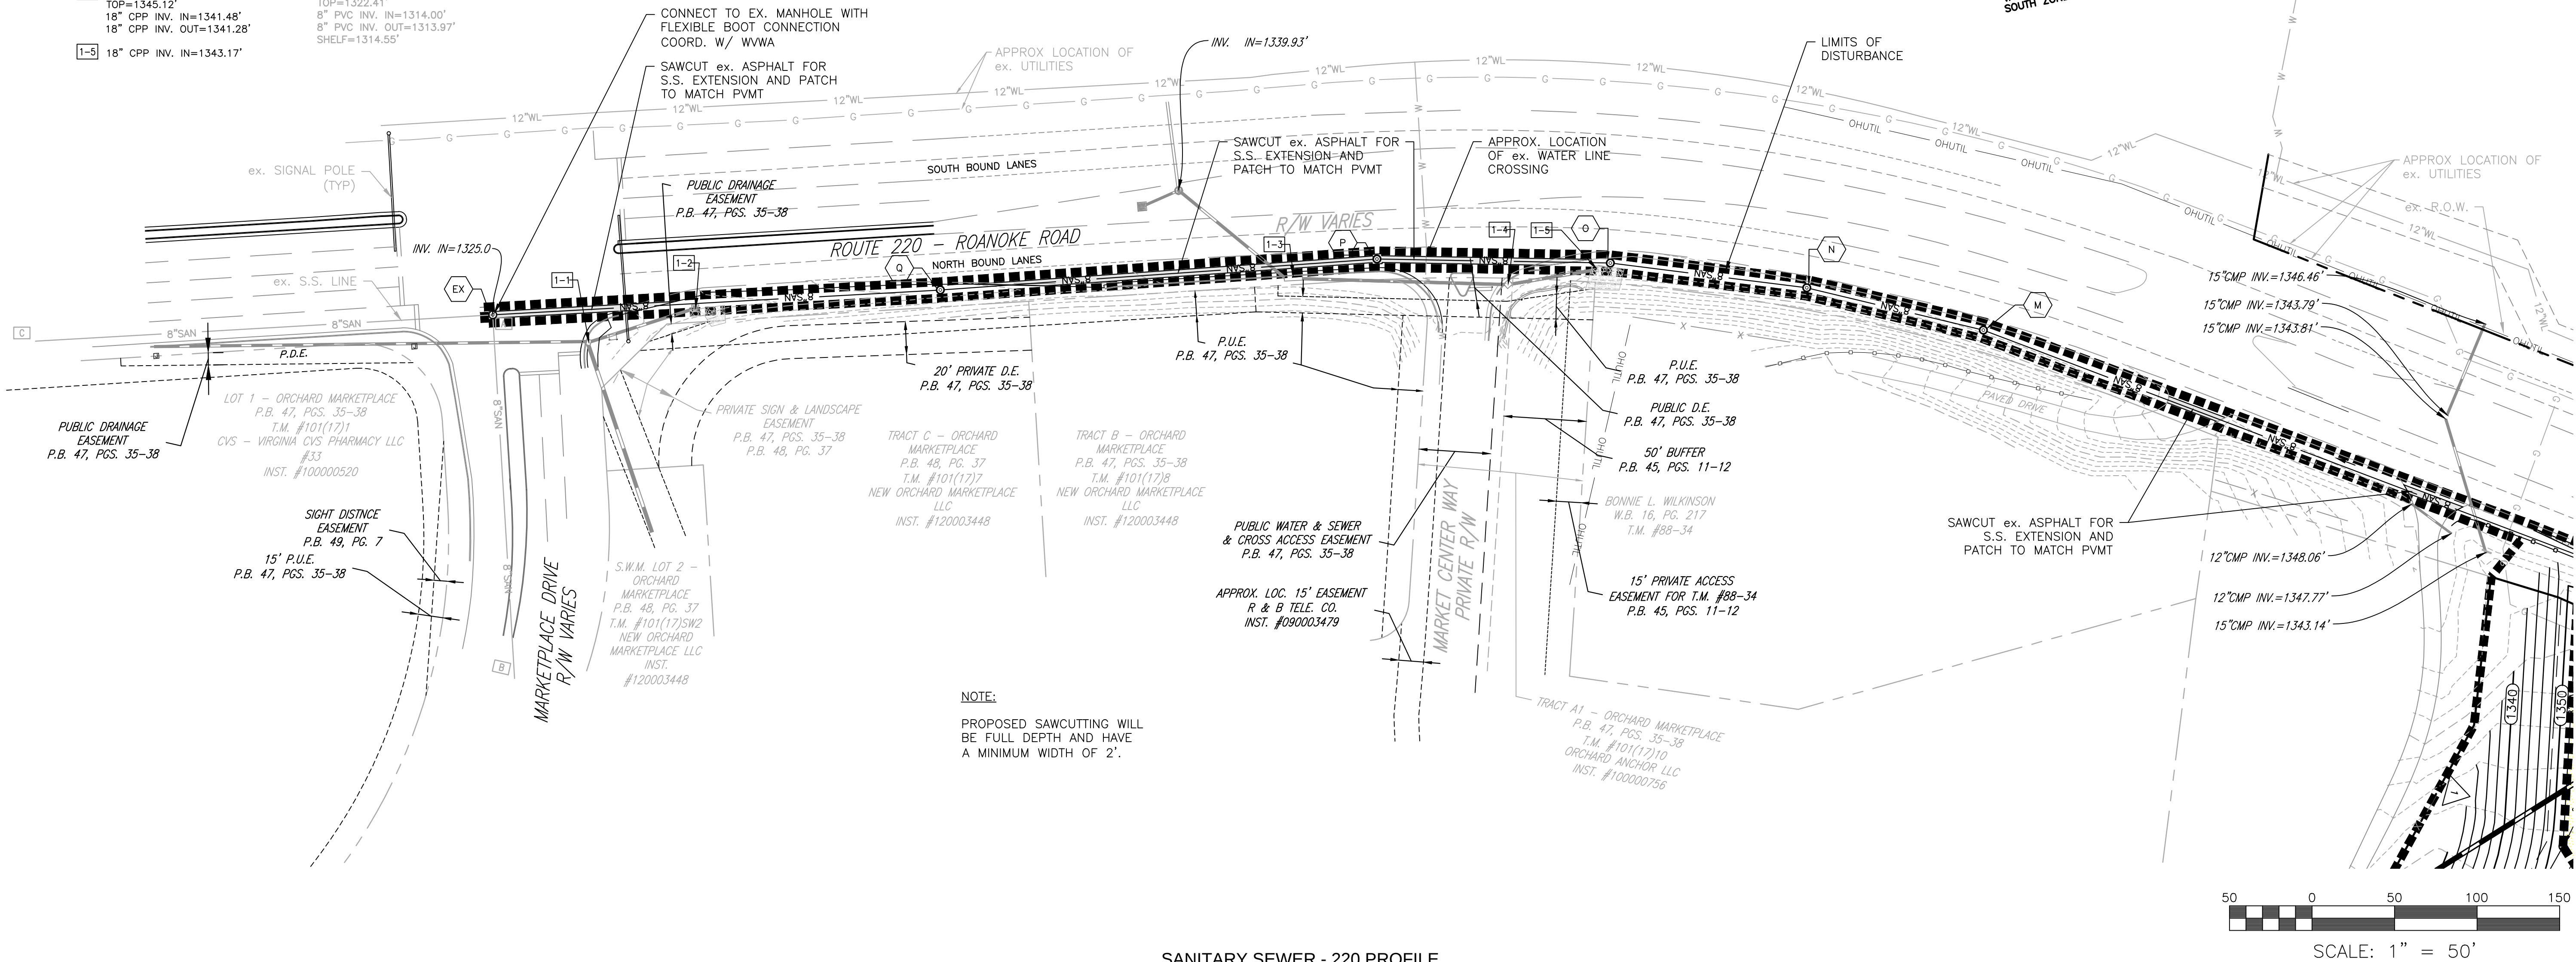

SANITARY SEWER - 220 PROFILE

