


GENERAL NOTES:


ALL DIMENSIONS SHOWN HEREON ARE TO THE BACK OF CURB OR FORM MIDDLE OF PIPE TO THE MIDDLE OF PIPE.

THE CONTRACTOR SHALL REPAIR ALL PAVEMENT DISTURBED AS A RESULT OF CONSTRUCTION OPERATIONS.

SANITARY SEWER CLEANOUTS AND LATERALS HAVE BEEN REPLACED FROM THE BUILDING TO THE BACK OF CURB AS PART OF WORK PERFORMED IN THE LATE '80'S. THE CONTRACTOR SHALL CONNECT TO EXISTING LATERALS AT OR NEAR THE BACK OF CURB, AND REPLACE CLEANOUTS AT THE DIRECTION OF THE OWNER.




TYPICAL CONCRETE DRIVEWAY JOINT DETAIL




- NOTES:
- 1) 3% MAXIMUM DECREASE IN SLOPE FOR FIRST 10 FOOT INTERVAL. 8% MAXIMUM DECREASE IN SLOPE FOR SUCCEEDING MINIMUM 10 FOOT INTERVALS.
 - 2) IF SITE CONDITIONS DICTATE A GRADE GREATER THAN 10% THE CONTRACTOR SHALL OBTAIN ENGINEER'S APPROVAL PRIOR TO INCREASING GRADE.

SECTION "A-A"

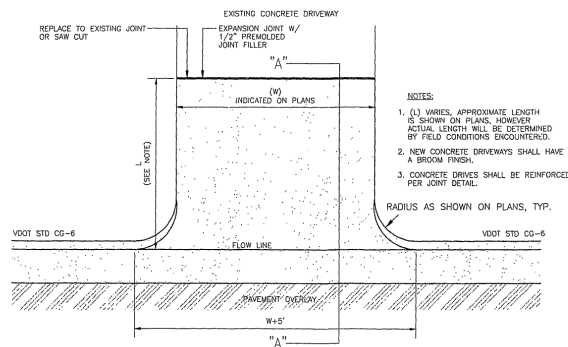

DETAIL "A"

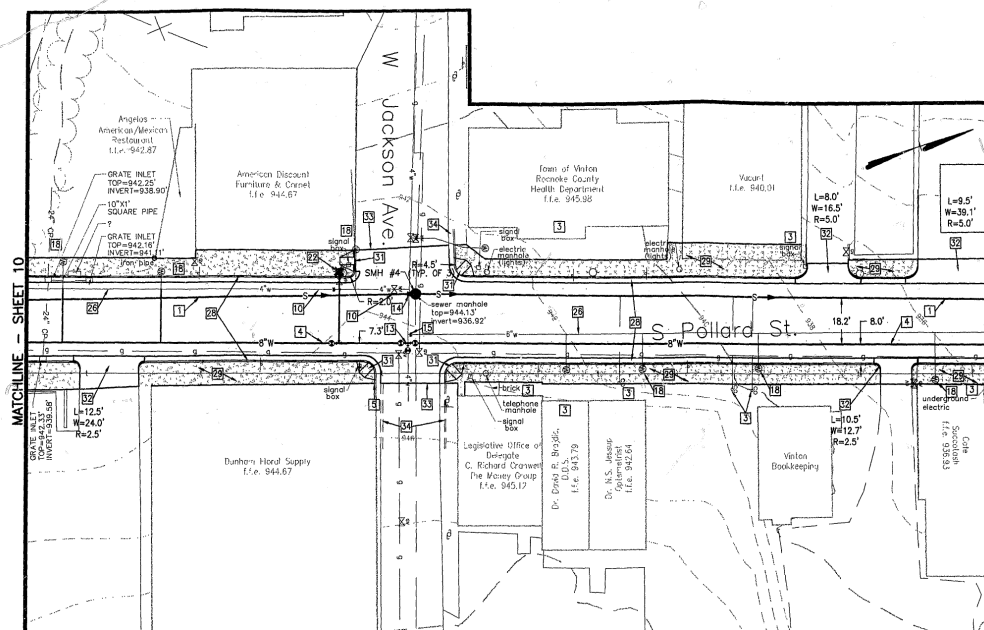

436 393210 7/18

KEYNOTES:

- 21 NOT USED
- 22 NEW FIRE HYDRANT, 6" VALVE, 6" PIPE AND 8"x6" TEE (REMOVE EXISTING HYDRANT, VALVE, ETC...)
- 23 NOT USED
- 24 NOT USED
- 25 NOT USED
- 26 REMOVE EXISTING WATERLINE WHEN IN CONFLICT WITH CONSTRUCTION OF SANITARY SEWER (FOR OPEN-CUT ALTERNATE). ABANDON EXISTING WATERLINE IN PLACE WHERE NO CONFLICT OCCURS WITH NEW CONSTRUCTION. PROVIDE APPROPRIATE PLUGS TO WATERLINE ABANDONED IN PLACE.
- 27 NOT USED
- 28 NEW VDOT STD. CG-6 CONCRETE CURB AND GUTTER. REFER TO DETAIL ON SHEET 6. CONTRACTOR SHALL INSTALL CURB AND GUTTER IN THE SAME LOCATION AS EXISTING AND ENSURE THAT RUNOFF DRAINS AWAY FROM ENTRANCES, AND BUILDINGS AND TOWARD EXISTING INLETS.
- 29 NEW CONCRETE SIDEWALK. SEE DETAIL ON SHEET 7 FOR TYPICAL SIDEWALK SECTION. CONTRACTOR SHALL CONSTRUCT SIDEWALK SUCH THAT RUNOFF IS DIRECTED TOWARD CURB AND GUTTER AWAY FROM BUILDINGS. CONTRACTOR SHALL INSTALL EXPANSION JOINT MATERIAL AROUND ALL EXISTING LIGHT POLES, WATER METERS & VALVE BOXES, GAS VALVES ETC... PRIOR TO POURING NEW SIDEWALKS.
- 30 NOT USED
- 31 NEW VDOT STD. CG-12 HANDICAP RAMP. SEE DETAIL ON SHEET 8.
- 32 NEW DRIVE DIMENSIONS AS SHOWN ON PLANS. SEE DETAIL ON SHEET 9.
- 33 LIMITS OF PAVEMENT PLANNING AND OVERLAY. REFER TO TYPICAL SECTION-PAVEMENT OVERLAY ON SHEET 6.
- 34 EXISTING CURB AND GUTTER TO REMAIN.

KEYNOTES:

- 1 NEW 8" SANITARY SEWER. REFER TO SHEET 12 FOR PROFILE AND ADDITIONAL INFORMATION. NOTE: DRAWINGS ARE DRAWN FOR OPEN CUT ALTERNATE.
- 2 SHORT SIDE SEWER LATERAL - REPLACE WITH NEW PIPE AND FITTING
- 3 LONG SIDE SEWER LATERAL - REPLACE WITH NEW PIPE AND FITTING
- 4 NEW 8" WATERLINE. REFER TO SHEET 14 FOR PROFILE AND ADDITIONAL INFORMATION.
- 5 NOT USED
- 6 NOT USED
- 7 NOT USED
- 8 NOT USED
- 9 NOT USED
- 10 NOT USED
- 11 8"x6" TEE
- 12 6"x4" TEE
- 13 8"x4" TEE AND VALVES
- 14 4" RESTRAINED PLUG(S)
- 15 6" RESTRAINED PLUG(S)
- 16 NOT USED
- 17 NOT USED
- 18 CONNECT WATER SERVICE TO NEW PIPE
- 19 NOT USED
- 20 NOT USED

R:\v\dwg\19556.dwg\dwg\Pollard-2.dwg



Revisions	Date

Drawn By: JPR
Designed By: JPR
Checked By: JPR
Date: Aug. 17, 2001

Matthew & Craig
CONSULTING ENGINEERS & ARCHITECTS
201 WEST STREET, S.W.
ROANOKE, VA 24001
TEL: 540-343-3442
FAX: 540-343-3441

DOWNTOWN IMPROVEMENTS
PLAN - POLLARD STREET
IMPROVEMENTS
TOWN OF VINTON, VIRGINIA

Project Scale:
N/A
Horizontal Scale:
1"=20'
Computation Number:
19558
Sheet No.:
9

