


TEMPORARY STOCKPILE SHALL BE LOCATED ON THE UPHILL SIDE OF THE TRENCH. SOIL STOCKPILE TO BE PLACED BACK IN EXCAVATED AREA AND COMPACTED PER AUTHORITY STANDARDS. UNSUITABLE OR EXCESS MATERIAL TO BE HAULED OFFSITE.


REMOVE SILT FENCE AFTER AREA IS STABILIZED. SEED AND MULCH ALL DISTURBED AREAS AS REQUIRED. CONTRACTOR TO REMOVE ANY SEDIMENT DEPOSITS FROM STORM DRAINAGE FACILITIES (PIPES, DITCHES, ETC.) AFTER THE UPSTREAM AREA OF THE PROJECT IS STABILIZED.

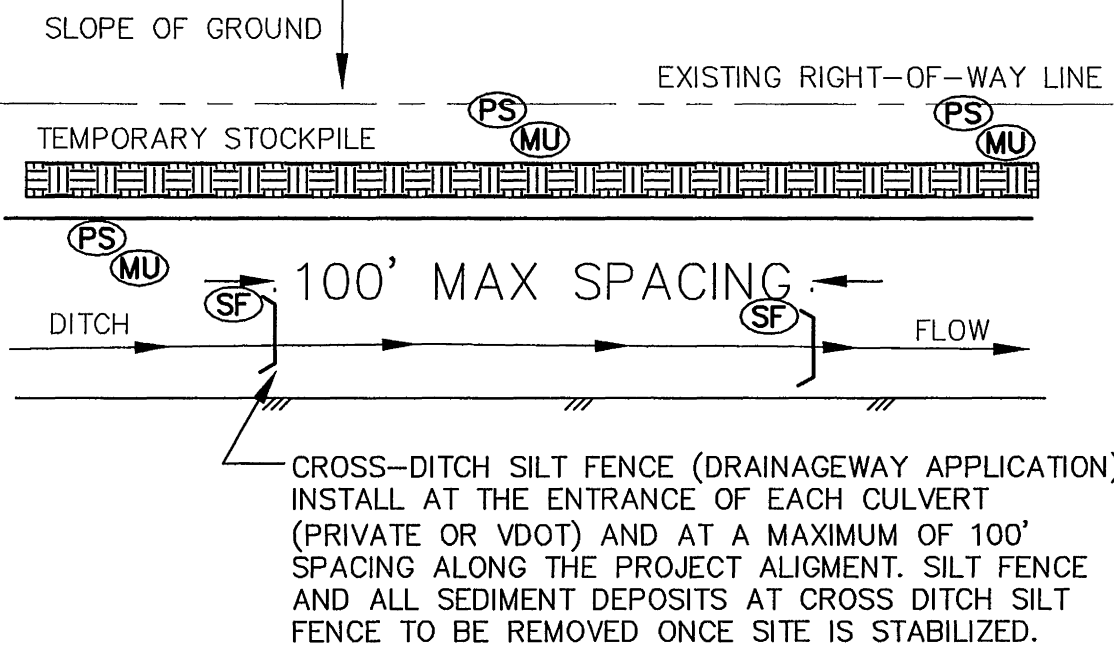

**TYPICAL EROSION CONTROL MEASURES FOR
WATERLINE INSTALLATION
STOCKPILE ON UPHILL SIDE OF TRENCH**
NTS


WHERE TEMPORARY STOCKPILE CANNOT BE LOCATED ON THE UPHILL SIDE OF THE TRENCH AND IS LOCATED ON THE DOWNHILL SIDE OF THE TRENCH, ADDITIONAL MEASURES WILL BE REQUIRED. SILT FENCE SHALL BE INSTALLED PARELLEL WITH CONSTRUCTION. SOIL STOCKPILE TO BE PLACED BACK IN EXCAVATED AREA AND COMPACTED PER AUTHORITY STANDARDS. UNSUITABLE OR EXCESS MATERIAL TO BE HAULED OFFSITE.

REMOVE SILT FENCE AFTER AREA IS STABILIZED. SEED AND MULCH ALL DISTURBED AREAS AS REQUIRED. CONTRACTOR TO REMOVE ANY SEDIMENT DEPOSITS FROM STORM DRAINAGE FACILITIES (PIPES, DITCHES, ETC.) AFTER THE UPSTREAM AREA OF THE PROJECT IS STABILIZED.

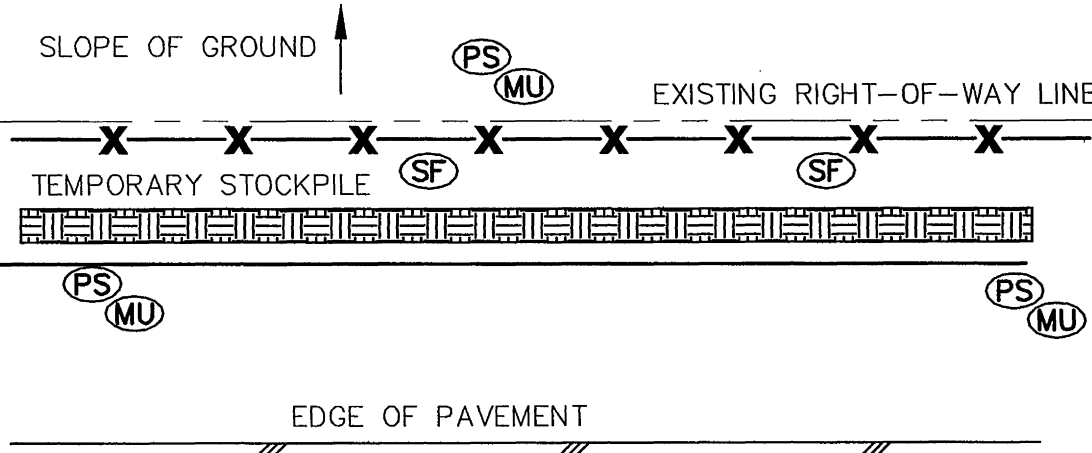

**TYPICAL EROSION CONTROL MEASURES FOR
WATERLINE INSTALLATION
STOCKPILE ON DOWNHILL SIDE OF TRENCH**
NTS


CONTRACTOR TO INSTALL SILT FENCE DOWN GRADIENT OR DOWNHILL OF THE WORK AREA. SOIL STOCKPILE TO BE PLACED BACK IN EXCAVATED AREA AND COMPACTED PER AUTHORITY STANDARDS. UNSUITABLE OR EXCESS MATERIAL TO BE HAULED OFFSITE. REMOVE SILT FENCE AFTER AREA IS STABILIZED. SEED AND MULCH ALL DISTURBED AREAS AS REQUIRED.

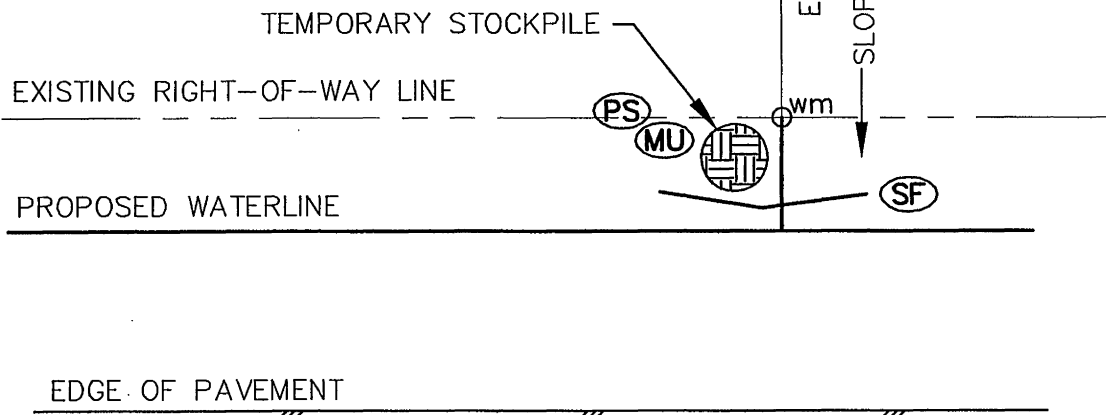

**TYPICAL EROSION CONTROL MEASURES FOR
WATER METER INSTALLATION**
NTS

CONTRACTOR TO INSTALL CROSS DITCH SILT FENCE IN ROADSIDE DITCH 5 FEET UPSTREAM FROM INLET OF CULVERT. TEMPORARY STOCKPILE SHALL BE LOCATED ON THE UPHILL SIDE OF THE TRENCH. SOIL STOCKPILE TO BE PLACED BACK IN EXCAVATED AREA AND COMPACTED PER AUTHORITY STANDARDS. UNSUITABLE OR EXCESS MATERIAL TO BE HAULED OFFSITE.

REMOVE SILT FENCE AFTER AREA IS STABILIZED. SEED AND MULCH ALL DISTURBED AREAS AS REQUIRED. CONTRACTOR TO REMOVE ANY SEDIMENT DEPOSITS FROM DRIVEWAY AND DRIVEWAY CULVERTS AFTER THE UPSTREAM AREA OF THE PROJECT IS STABILIZED.

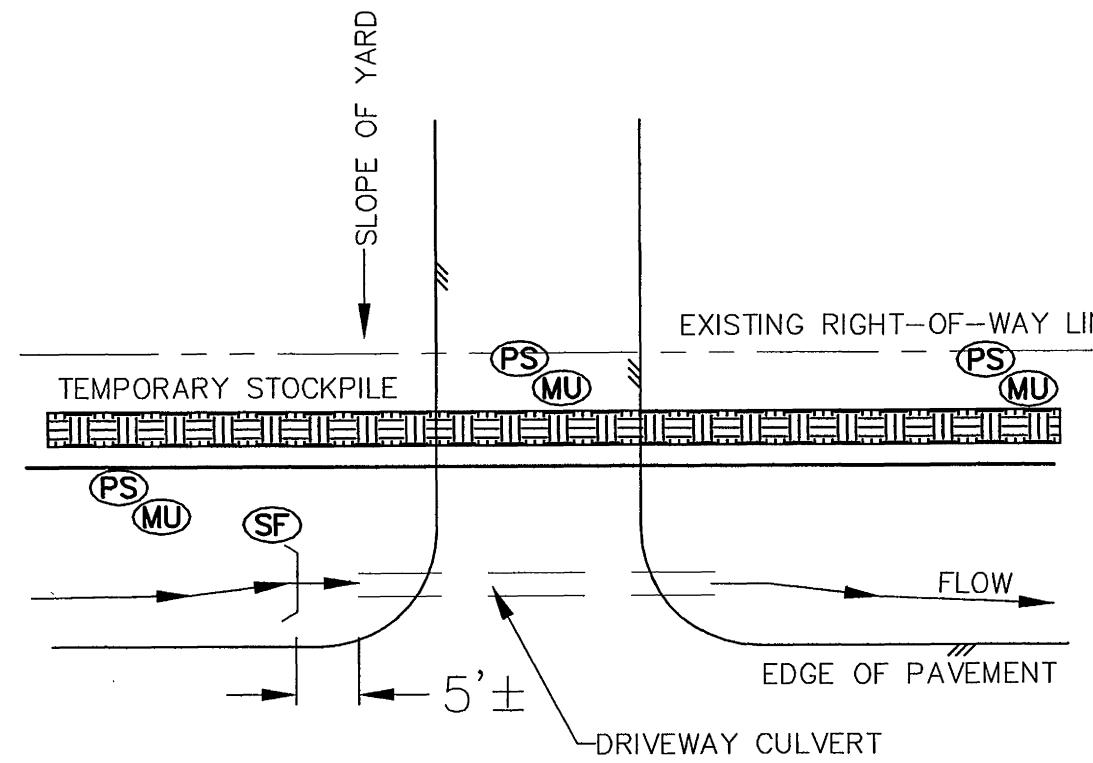

**TYPICAL EROSION CONTROL MEASURES FOR
EXISTING DRIVEWAY CULVERTS**
NTS