


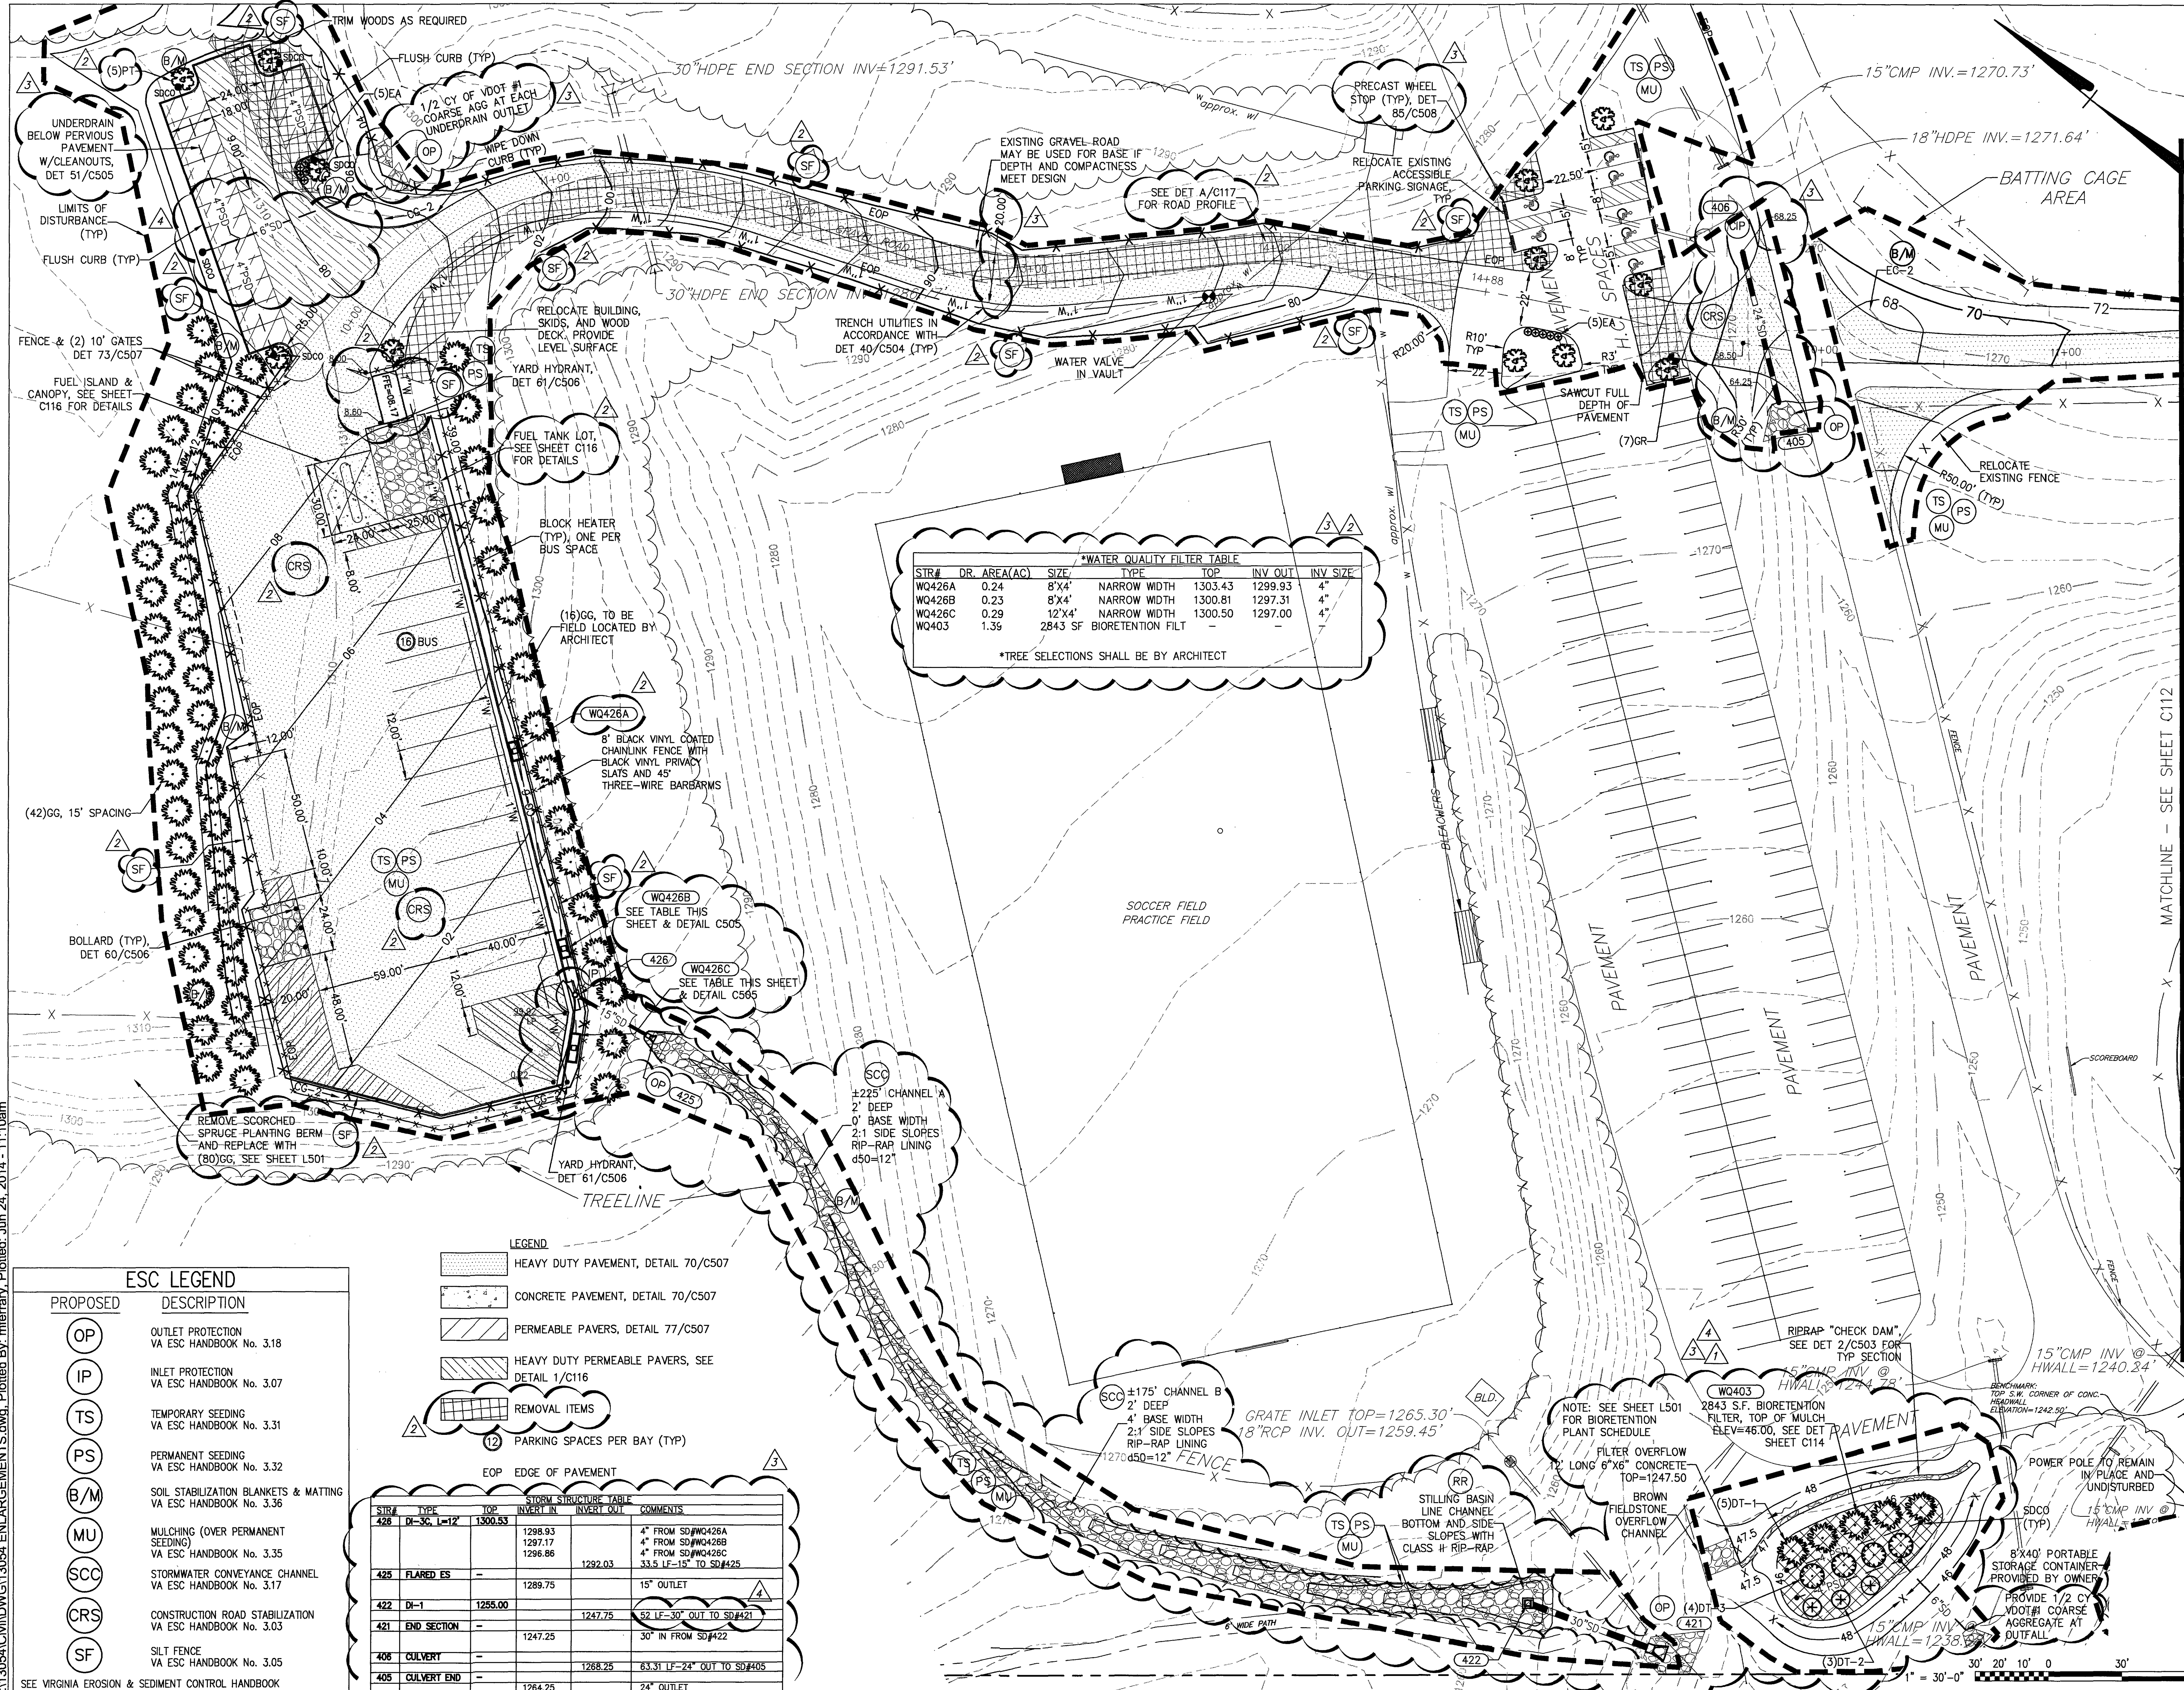

KEY PLAN

GENERAL NOTES

1. THE CONTRACTOR SHALL CONTACT "MISS UTILITY" (1-800-552-7001) 48 HOURS PRIOR TO WORKING IN THE VICINITY OF THE EXISTING UTILITIES.
2. UNLESS OTHERWISE NOTED ALL LINEAR & RADIAL DIMENSIONS ARE TO THE FACE OF CURB, UNLESS OTHERWISE NOTED ALL CURB RADII = 5'.
3. REFER TO ARCHITECTURAL DRAWINGS FOR FUEL ISLAND LAYOUT AND DIMENSIONS.
4. ALL CONCRETE CURB SHALL BE CONSTRUCTED IN ACCORDANCE WITH VDOT STANDARDS.
5. ALL SITE LAYOUT SHALL BE PERFORMED BY A LICENSED SURVEYOR UTILIZING AN ELECTRONIC COPY OF THE PLANS. DIMENSIONS PROVIDED ARE FOR GENERAL LOCATION PURPOSES ONLY.
6. ALL CONCRETE JOINTS SHALL BE BEVELED. STANDARD JOINTS WILL NOT BE ACCEPTED (TYP).
7. PROVIDE 1/2" EXPANSION JOINT BETWEEN ALL FLATWORK EDGES AND BUILDINGS AND AT APPROXIMATELY 30' SPACING. ALLOW 1/2" AT TOP FOR SEALANT. PROVIDE SCORE JOINTS ELSEWHERE AS SHOWN.
8. ALL SIGNS, EXISTING OR PROPOSED, SHALL COMPLY WITH REQUIREMENTS STATED IN SECTION 30-93 OF THE ROANOKE COUNTY ZONING ORDINANCE.
9. REFER TO VDOT ROAD AND BRIDGE STANDARDS FOR PAVEMENT MARKING DETAILS.
10. SEE SHEET L501 FOR LANDSCAPE SCHEDULE.
11. SEE OUTLET PROTECTION SCHEDULE, DETAIL 1/C503.

SPECTRUM DESIGN
architects | engineers

10 CHURCH AVE SE, PLAZA SUITE 1 ROANOKE, VIRGINIA 24011 540.342.8001

GLENVAR HIGH SCHOOL RENOVATIONS & ADDITIONS

ROANOKE COUNTY

VA DOE PROJECT#:80-61-00-101

SPECTRUM DESIGN PROJECT NO. 13054

APPROVED

DATE: 06 APRIL 2014
DESIGN ARCHITECT: MICHAEL A. RAKES
PROJECT ARCHITECT: MICHAEL A. RAKES
PROJECT ENGINEER: MICHAEL A. RAKES
CHECKED BY: MF
DRAWN BY: MF

REVISIONS

REVISIONS	NUMBER	DATE
BIORETENTION ADD	1	04/24/14
COUNTY REVIEW #1	2	05/09/14
COUNTY REVIEW #2	3	06/04/14
COUNTY REVIEW #3	4	06/20/14

SHEET TITLE

FUEL LOT - ESC, GRADING & DIMENSIONAL PLAN

C113