

SITE CONSTRUCTION PLAN GENERAL NOTES

ALL MATERIALS AND CONSTRUCTION WITHIN THE PUBLIC RIGHT-OF-WAY SHALL BE IN ACCORDANCE WITH CURRENT CITY OF ROANOKE STANDARDS AND SPECIFICATIONS.

A RIGHT-OF-WAY EXCAVATION PERMIT MUST BE OBTAINED FROM THE CITY OF ROANOKE PRIOR TO BEGINNING ANY CONSTRUCTION WITHIN THE EXISTING CITY MAINTAINED RIGHT-OF-WAY (INCLUDING ACCESS).

THE CONTRACTOR SHALL VERIFY THE ELEVATIONS OF ALL POINTS OF CONNECTION OR PROPOSED WORK TO EXISTING CURBS, SANITARY LINES, WATER LINES, ETC., PRIOR TO CONSTRUCTION. CONTACT THE CONSULTING ENGINEER IF ANY DISCREPANCIES ARE FOUND.

UPON THE DISCOVERY OF SOILS THAT ARE UNSUITABLE FOR FOUNDATIONS, SUBGRADES, OR OTHER ROADWAY CONSTRUCTION PURPOSES, THE CONTRACTOR SHALL IMMEDIATELY CONTACT A GEOTECHNICAL ENGINEER AND/OR THE CITY OF ROANOKE. THESE AREAS SHALL BE EXCAVATED BELOW PLAN GRADE AS DIRECTED BY THE GEOTECHNICAL ENGINEER, BACKFILLED WITH SUITABLE MATERIAL AND COMPACTED IN ACCORDANCE WITH CURRENT VDOT SPECIFICATIONS.

ALL STORM SEWER DESIGN AND CONSTRUCTION TO BE IN ACCORDANCE WITH VDOT STANDARDS AND SPECIFICATIONS.

ALL ENTRANCES ARE TO BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH
CURRENT CITY OF ROANOKE STANDARDS.

CONTRACTOR SHALL VERIFY LOCATION AND ELEVATION OF ALL UNDERGROUND UTILITIES SHOWN ON PLANS IN AREAS OF CONSTRUCTION PRIOR TO STARTING WORK. CONTRACT ENGINEER IMMEDIATELY IF LOCATION OR ELEVATION IS DIFFERENT FROM THAT SHOWN ON PLAN. IF THERE APPEARS TO BE A CONFLICT, AND/OR UPON DISCOVERY OF AN UTILITY SHOWN ON THIS PLAN, CALL MISS UTILITY OF CENTRAL VIRGINIA AT 1-800-552-7001. THE DEVELOPER SHALL BE RESPONSIBLE FOR THE RELOCATION OF ANY UTILITY WITHIN EXISTING AND/OR PROPOSED RIGHT-OF-WAY REQUIRED BY THE DEVELOPMENT.

CASING SLEEVES SHALL BE PLACED AT ALL PAVEMENT CROSSINGS FOR GAS, POWER, TELEPHONE, CABLE TV AND IRRIGATION SERVICE LINES.

THE INSTALLATION OF SEWER, WATER, AND GAS MAINS (INCLUDING SERVICE LATERALS AND/OR SLEEVES) SHALL BE COMPLETED PRIOR TO PLACEMENT OF AGGREGATE BASE COURSE.

A PRIME COAT SEAL BETWEEN THE AGGREGATE BASE AND BITUMINOUS CONCRETE WILL BE REQUIRED AT A RATE OF 0.30 GALLONS PER SQUARE YARD (REC-250 PRIME COAT) PER VDOT STANDARDS AND SPECIFICATIONS.

THE SCHEDULING OF AGGREGATE BASE INSTALLATION AND SUBSEQUENT PAVING ACTIVITIES SHALL ACCOMMODATE FORECAST WEATHER CONDITIONS PER SECTION 315 OF THE VDOT ROAD AND BRIDGE SPECIFICATIONS (LATEST EDITION).

ALL VEGETATION AND ORGANIC MATERIAL IS TO BE REMOVED FROM THE
RIGHT-OF-WAY LIMITS PRIOR TO CONDITIONING OF THE SUBGRADE.

G.C. SHALL SUBMIT A TRAFFIC CONTROL PLAN TO THE CITY OF ROANOKE PRIOR TO ANY CONSTRUCTION WITHIN THE RIGHT-OF-WAY.

GRADING NOTES

1. G.C. SHALL PROVIDE POSITIVE DRAINAGE AWAY FROM ALL BUILDINGS.
2. REFER TO BUILDING PLANS FOR SUBGRADE AND UTILITY TRENCHES WITHIN 5' OF THE BUILDING ENVELOPE.
3. REMOVE TREES, SHRUBS, GRASS, AND OTHER VEGETATION, IMPROVEMENTS OR OBSTRUCTIONS AS REQUIRED TO PERMIT INSTALLATION OF NEW CONSTRUCTION. REMOVE TREES AND OTHER VEGETATION, INCLUDING STUMPS AND ROOTS, COMPLETELY IN AREAS REQUIRED FOR SUBSEQUENT SEEDING. CUT OFF TREES AND STUMPS IN AREAS TO RECEIVE FILL MORE THAN THREE FEET IN DEPTH TO WITHIN EIGHT INCHES OF THE ORIGINAL GROUND SURFACE.
4. BARRICADE OPEN EXCAVATIONS OCCURRING AS PART OF THIS WORK AND OPERATE WARNING LIGHTS AS RECOMMENDED BY AUTHORITIES HAVING JURISDICTION.
5. EXCAVATION FOR STRUCTURES:
 - a. CONFORM TO ELEVATIONS AND DIMENSIONS SHOWN WITHIN A TOLERANCE OF 0.1'.
 - b. PROVIDE TRUE AND STRAIGHT FOOTING EXCAVATIONS WITH UNIFORM AND LEVEL BOTTOMS OF THE WIDTH INDICATED TO ENSURE PROPER PLACEMENT AND COVER OF ALL REINFORCEMENT.
 - c. REMOVE LOOSE MATERIALS FROM THE EXCAVATION PRIOR TO PLACEMENT OF CONCRETE.
 - d. FOOTINGS WHICH SUPPORT CONCRETE MASONRY UNITS MAY BE STEPPED PROVIDED THE VERTICAL STEP DOES NOT EXCEED ONE HALF OF THE HORIZONTAL DISTANCE BETWEEN STEPS AND HORIZONTAL DISTANCE BETWEEN STEPS IS NOT LESS THAN TWO FEET.
 - e. IF ROCK IS ENCOUNTERED IN A FOOTING EXCAVATION, UNDERCUT IT A MINIMUM EXCAVATION WITH CONTROLLED FILL.
6. CUT SURFACE UNDER PAVEMENTS TO COMPLY WITH CROSS SECTIONS, ELEVATIONS AND GRADES AS INDICATED.
7. EXCAVATE TRENCHES TO UNIFORM WIDTH CONFORMING TO VDOT STANDARD PB-1 FOR STORM DRAINAGE PIPING.
8. PREVENT SURFACE WATER AND SUBSURFACE OR GROUND WATER FROM FLOWING INTO EXCAVATIONS AND FROM FLOODING PROJECT SITE AND SURROUNDING AREA. DO NOT ALLOW WATER TO ACCUMULATE IN EXCAVATIONS. REMOVE WATER TO PREVENT SOFTENING OF FOUNDATION BOTTOMS, UNDERCUTTING FOOTINGS, AND SOIL CHANGES DETRIMENTAL TO STABILITY OF SUBGRADES AND FOUNDATIONS. CONVEY WATER WHEN ATMOSPHERIC TEMPERATURE IS LESS THAN 35°F (1°C).
9. PROTECT EXCAVATED BOTTOMS OF ALL FOOTINGS AND TRENCHES AGAINST FREEZING WHEN ATMOSPHERIC TEMPERATURE IS LESS THAN 35°F (1°C).
10. BACKFILLING SHALL BE A SUITABLE MATERIAL THAT IS CAPABLE ACHIEVING THE REQUIRED COMPACTIONS INDICATED ON THE DETAILS PAGE.
11. FINISH LAWN AREAS TO WITHIN ONE INCH ABOVE OR BELOW REQUIRED SUBGRADE ELEVATIONS. SHAPE SURFACE UNDER WALKS AND PAVEMENTS TO LINE, GRADE, AND CROSS SECTION, WITH NOT MORE THAN 1/2" ABOVE OR BELOW REQUIRED SUBGRADE ELEVATION.
12. GRADE SURFACE UNDER BUILDING SLABS SMOOTH AND EVEN, FREE OF VOIDS. PROVIDE FINAL GRADES WITHIN 1/2" OF THOSE INDICATED WHEN TESTED WITH A 10' STRAIGHT EDGE.
13. PROTECT GRADED AREAS FROM TRAFFIC AND EROSION. REPAIR AREAS WHICH HAVE SETTLED, ERODED, OR BECOME DAMAGED DUE TO CONSTRUCTION ACTIVITIES AT NO ADDITIONAL COST TO OWNER.
14. PREPARE AREA FOR SEEDING BY SPREADING TOPSOIL TO A DEPTH OF 4" OVER ALL DISTURBED AREAS NOT RECEIVING WALKS, PAVEMENT, WALLS OR BUILDING, INCLUDING TRENCHES. IMMEDIATELY FOLLOWING PLACEMENT OF TOPSOIL, DISK THE ENTIRE TOPSOILED AREA AND RAKE FREE OF STONES AND DEBRIS OVER 1/2" IN ANY DIMENSION. PROVIDE A FINISHED SURFACE FREE OF DEPRESSIONS OR HIGH SPOTS.
15. OWNER (CONTRACTOR) SHALL EMPLOY QUALIFIED SOILS TESTING LABORATORY TO INSPECT EARTHWORK OPERATIONS. NOTIFY LABORATORY PRIOR TO PERFORMING EARTHWORK OPERATIONS.

GENERAL UTILITY NOTES

2. SUPPLY AND INSTALL ALL MATERIALS AND METHODS FOR WATERLINES, SANITARY SEWERS AND STORM DRAINAGE IN ACCORDANCE WITH THE SPECIFICATIONS AND REQUIREMENTS OF THE CITY OF ROANOKE, THE WESTERN VIRGINIA WATER AUTHORITY, AND/OR THE VIRGINIA DEPARTMENT OF TRANSPORTATION "ROAD AND BRIDGE STANDARDS AND SPECIFICATIONS", LATEST EDITION.
3. OBTAIN ALL REQUIRED PERMITS AND NOTIFY APPROPRIATE OFFICIALS 48 HOURS PRIOR TO COMMENCEMENT OF WORK. OBTAIN INFORMATION FROM WESTERN VIRGINIA WATER AUTHORITY AND/OR CITY OF ROANOKE CONCERNING PERMITS AND CONNECTIONS TO EXISTING LINES.
4. ALL WORK SHALL BE SUBJECT TO INSPECTION BY WESTERN VIRGINIA WATER AUTHORITY AND/OR CITY OF ROANOKE. NOTIFY APPROPRIATE OFFICIALS PRIOR TO COMMENCEMENT OF WORK.
5. SITE SHALL BE TO SUBGRADE PRIOR TO INSTALLATION OF UTILITIES. ALL UTILITIES SHALL BE IN PLACE PRIOR TO PLACEMENT OF PAVEMENT BASE MATERIAL.
6. USE SELECT MATERIAL FREE FROM FROST, LARGE CLODS, STONES, AND DEBRIS FOR BACKFILL FROM THE BOTTOM OF THE TRENCH TO TWELVE (12) INCHES ABOVE THE PIPE.
7. MINIMIZE ANY DISTURBANCE TO EXISTING WATER SERVICE, SEWER LINES OR ANY OTHER UTILITY DURING CONSTRUCTION AND PROVIDE QUALITY WORKMANSHIP.
8. MAKE ALL PIPE JOINTS IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND/OR WESTERN VIRGINIA WATER AUTHORITY SPECIFICATIONS. MAKE JOINTS BETWEEN DIFFERENT PIPE MATERIALS WITH STANDARD FITTINGS MANUFACTURED FOR THE PURPOSE.
9. MAINTAIN ALL WATER LINES AT TEN (10) FEET HORIZONTAL SEPARATION FROM SEWER LINES AND MANHOLES; MEASURE THE DISTANCE EDGE-TO-EDGE. WHEN LOCAL CONDITIONS PREVENT THE DESIRED HORIZONTAL SEPARATION, THE WATERLINE MAY BE LAID CLOSER TO THE SEWER OR MANHOLE PROVIDED THAT THE BOTTOM OF THE WATERLINE SHALL BE AT LEAST EIGHTEEN (18) INCHES ABOVE THE TOP OF THE SEWER. WHERE THIS VERTICAL SEPARATION CANNOT BE OBTAINED, CONSTRUCT THE SEWER OF AWWA APPROVED WATER PIPE AND PRESSURE TREAT IN PLACE PRIOR TO BACKFILLING. THE SEWER MANHOLE SHALL BE OF WATERTIGHT CONSTRUCTION TESTED IN PLACE.
10. SEWER AND WATER TAPS SHALL BE LOCATED BY THE CONTRACTOR, PERFORMED BY THE CONTRACTOR/DEVELOPER AND INSPECTED BY THE WESTERN VIRGINIA WATER AUTHORITY.
11. LOCATE AND UNCOVER VALVE VAULTS AND MANHOLES AFTER PAVING AND ADJUST TO FINAL GRADE, IF NECESSARY.
12. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATIONS WHERE UTILITIES ENTER THE BUILDING.
13. PRIOR TO COMMENCING WITH ANY UNDERGROUND PIPE CONSTRUCTION OR GRADING (EXCAVATION), THE GENERAL CONTRACTOR SHALL CALL MISS UTILITY OF VIRGINIA (TOLL FREE 1-800-552-7001) AT LEAST 48 HOURS PRIOR TO COMMENCING. THE G.C. IS RESPONSIBLE FOR ANY DAMAGE CAUSED TO ANY UTILITY, PUBLIC OR PRIVATE, AS A RESULT OF NOT CONTACTING MISS UTILITY AND SHALL BE REPAIRED AT NO ADDITIONAL COST TO THE OWNER/DEVELOPER.
14. EXISTING UTILITY LOCATIONS SHOWN ARE A RESULT OF FIELD SURVEYS, AND AVAILABLE RECORDS AND PREVIOUSLY APPROVED PLANS. LOCATIONS ARE APPROXIMATE. GENERAL CONTRACTOR SHALL VERIFY THE LOCATION AND ELEVATION OF ALL UNDERGROUND UTILITIES SHOWN ON THE PLANS IN AREAS OF CONSTRUCTION PRIOR TO STARTING WORK. CONTACT THE ENGINEER IMMEDIATELY IF: 1) ANY LOCATION OR ELEVATION IS DIFFERENT FROM THAT SHOWN ON THE PLANS. 2) IF THERE APPEARS TO BE ANY CONFLICT, UPON DISCOVERY OF ANY UTILITY NOT SHOWN ON THE PLANS. G.C. SHALL CALL "MISS UTILITY" OF VIRGINIA AND/OR CITY OF ROANOKE AND/OR WESTERN VIRGINIA WATER AUTHORITY.
15. PROVIDE A CONTINUOUS AND UNIFORM BEDDING IN THE TRENCH FOR ALL PIPE. REMOVE STONES AND ROCKS FOUND IN THE TRENCH FOR A DEPTH OF AT LEAST SIX (6) INCHES BELOW THE BOTTOM OF THE PIPE AND TAMP SELECT FILL BEDDING PROVIDED. AFTER THE PIPE HAS BEEN PLACED IN THE TRENCH, BACKFILL THE TRENCH WITH SELECT MATERIAL, THOROUGHLY COMPACT TO 90% (95% UNDER PAVEMENT OR CONCRETE SLAB) OF THE STANDARD PROCTOR (ASTM D-698) USING CARE NOT TO DAMAGE THE PIPE. USE VDOT STANDARD PB-1 TRENCH FOR STORM SEWER AND UB-1 FOR SANITARY SEWER AND WATER.
16. PLACE BACKFILL FOR ALL WATER AND SEWER UTILITIES IN ACCORDANCE WITH WESTERN VIRGINIA WATER AUTHORITY SPECIFICATIONS, AND THE FOLLOWING CRITERIA: 1) BACKFILL NO TRENCH UNTIL INSPECTED BY WESTERN VIRGINIA WATER AUTHORITY. MATERIALS USED FOR BACKFILL FROM THE BOTTOM OF THE TRENCH TO TOP OF THE PIPE SHALL BE CRUSHER RUN, OR APPROVED EQUAL MATERIAL. THOROUGHLY AND CAREFULLY COMPACT THE BACKFILL MATERIAL. 2) COMPACT BACKFILL BY MECHANICAL TAMPING THROUGHOUT THE DEPTH OF THE TRENCH TO ENSURE A SUITABLE SUBBASE ACCEPTABLE TO THE ROAD ENGINEER. IF THE MATERIAL TAKEN FROM THE DITCH IS NOT SUITABLE FOR BACKFILLING, REMOVE IT AND USE AN ACCEPTABLE MATERIAL FOR BACKFILLING THE TRENCH.
17. IN AREAS OF WATER LINE CONSTRUCTION, GRADES SHALL BE WITHIN SIX (6) INCHES OF FINAL GRADE PRIOR TO BEGINNING CONSTRUCTION.
18. MINIMUM COVER OVER ALL WATER AND SANITARY SEWER LINES SHALL BE THREE (3) FEET.
19. THE CONTRACTOR SHALL INSTALL ALL WATER SERVICE CONNECTIONS AND METER BOXES.
20. CONNECT PIPE TO MANHOLES THROUGH PRE CAST OPENINGS AND JOIN WITH EITHER A FLEXIBLE BOOT ADAPTER OR A PIPE SEAL GASKET.


CONSTRUCTION SITE PLAN GENERAL NOTES

CONSTRUCTION METHODS

3. ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CURRENT VIRGINIA DEPARTMENT OF TRANSPORTATION ROAD AND BRIDGE SPECIFICATIONS, VIRGINIA DEPARTMENT OF TRANSPORTATION ROAD AND BRIDGE STANDARDS, AND LOCAL JURISDICTIONAL STANDARDS AND SPECIFICATIONS, WHERE APPLICABLE. ANY WORK WITHIN PETERS CREEK ROAD SHALL ADHERE TO THE CITY OF ROANOKE RIGHT OF WAY EXCAVATION AND RESTORATION STANDARDS.
2. THE LOCATION OF EXISTING UTILITIES AS SHOWN IS APPROXIMATE. THE CONTRACTOR SHALL VERIFY THE LOCATION OF EXISTING UTILITIES PRIOR TO ANY CONSTRUCTION WORK AND NOTIFY ENGINEER IMMEDIATELY IF LOCATIONS DIFFER FROM PLANS.
3. THE CONTRACTOR SHALL NOTIFY 'MISS UTILITY' AT 1-800-552-7001 OR 811 PRIOR TO ANY CONSTRUCTION WORK IN THIS AREA.
- HANDICAPPED ACCESSIBILITY / ADA COMPLIANCE
1. THE MAXIMUM ALLOWABLE CROSS SLOPE ACROSS ACCESSIBLE PARKING SPACES AND ACCESSIBLE AISLES IS 2%. NO SLOPE IN ANY DIRECTION SHALL EXCEED 2% WITHIN ADA PARKING SPACES OR AISLES.
2. THE MAXIMUM ALLOWABLE LONGITUDINAL SLOPE ALONG ACCESSIBLE AISLES IS 5%.
3. THE CONTRACTOR SHALL VERIFY SLOPES AND GRADES FOR ALL ACCESSIBLE PARKING SPACES AND ACCESS AISLES AFTER STAKING IS COMPLETE AND BOTH BEFORE AND AFTER INSTALLATION.
4. ANY SLOPE DISCREPANCIES DETECTED BY THE SURVEYOR AND/OR CONTRACTOR SHALL BE REPORTED TO THE ENGINEER PRIOR TO INSTALLATION.
5. UNLESS SPECIFICALLY NOTED ON THE SITE PLAN, DETECTABLE WARNING STRIPS ARE REQUIRED AT ALL CURB RAMPS AND FLUSH CURB TRANSITIONS TO PARKING LOTS.
6. HAND RAILS ARE REQUIRED FOR ANY ACCESSIBLE SITE PEDESTRIAN RAMPS WITH LONGITUDINAL SLOPES THAT EXCEED 5% AND / OR 6-INCHES IN RISE.
7. SITE HAND RAILS SHALL BE PER VDOT / ADA / ANSI STANDARDS AND SPECIFICATIONS, UNLESS NOTED OTHERWISE.
8. SITE HAND RAILS SHALL BE INSTALLED ON BOTH SIDES OF THE SITE SIDEWALKS WHERE HAND RAILS ARE REQUIRED.
9. PER VDOT STANDARDS, THE MAXIMUM PERMISSIBLE CURB RAMP SLOPE IS 12:1.
10. WHEEL STOPS FOR ACCESSIBLE PARKING SPACES SHALL BE INSTALLED 3'-0" OFF THE FACE OF CURB.
11. GUTTER PAN INSTALLED IN ACCESSIBLE PARKING SPACES SHALL NOT EXCEED 2% SLOPE.
12. NO VERTICAL TRANSITIONS IN ADA ACCESSIBLE ROUTES SHALL EXCEED 1/4".
- CURB AND GUTTER
1. THE CONTRACTOR SHALL USE A MINIMUM OF THREE (3) RUNNING CONSTRUCTION STAKES TO AVOID HARD BREAK LINES IN THE CURB - UNLESS SPECIFICALLY CALLED FOR ON THE PLANS.
2. THE MINIMUM LONGITUDINAL SLOPE FOR GUTTER PAN IS 0.5%, UNLESS OTHERWISE NOTED ON PLANS.
3. A MINIMUM 20-FOOT TRANSITION FROM CG-6 TO CG-7 IS REQUIRED, UNLESS OTHERWISE NOTED ON THE PLANS.
4. ALL CURB AND GUTTER SHOWN ON THE PLANS SHALL BE VDOT CG-6, CG-2, OR CG-7, UNLESS SPECIFICALLY NOTED OTHERWISE.
- UNDERGROUND UTILITIES
1. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING LINE AND GRADE FOR ALL DRY UTILITIES PRIOR TO THE START OF CONSTRUCTION.
2. THE CONTRACTOR IS RESPONSIBLE FOR REVIEWING DRY UTILITY LINES AND GRADES AGAINST ALL PROPOSED UTILITIES SHOWN ON THE PLANS. POTENTIAL CONFLICTS SHALL BE REPORTED TO THE ENGINEER AS SOON AS POSSIBLE.
3. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING TELEPHONE, CABLE, FIBER OPTIC, AND ELECTRICAL SERVICES TO THE PROJECT. CONTACT UTILITY PROVIDERS AS SOON AS POSSIBLE TO BEGIN COORDINATION.
4. THE CONTRACTOR SHALL REVIEW SITE AND BUILDING DRAWINGS TO VERIFY COORDINATION OF UTILITY INVERTS. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.
- SIDEWALKS AND SITE STAIRS
1. ALL SITE STAIRS SHALL BE FURNISHED WITH VDOT HR-1 ON BOTH SIDES OF THE STAIRS.
2. ALL SITE STAIRS SHALL BE CONSTRUCTED IN ACCORDANCE WITH VDOT / ADA / ANSI STANDARDS AND SPECIFICATIONS, UNLESS SPECIFICALLY NOTED OTHERWISE.
3. SIDEWALKS SHALL BE INSTALLED WITH A MAXIMUM 2% CROSS-SLOPE
4. SIDEWALKS SHALL BE BROOM FINISHED, UNLESS NOTED OTHERWISE ON THE PLANS.
5. SIDEWALKS SHALL BE 5-FEET IN WIDTH, UNLESS NOTED OTHERWISE ON THE PLANS.
- ROOF DRAINS AND DOWN SPOUTS
1. ALL DOWNSPOUTS NOT CONNECTED TO STORM SEWER SHALL BE FURNISHED WITH SPLASH BLOCKS.
2. ALL DOWN SPOUTS SHALL BE FURNISHED WITH A DOWNSPOUT/ROOF DRAIN TRANSITION BOOT. STUBBING OF DOWNSPOUT INTO ROOF DRAIN LATERAL WITHOUT A SUITABLE BOOT TRANSITION IS NOT PERMITTED.
3. ALL ROOF DRAIN LATERALS SHALL BE INSTALLED IN ACCORDANCE WITH THE PREVAILING LOCAL JURISDICTIONAL PLUMBING CODE OR THE INTERNATIONAL PLUMBING CODE, WHICHEVER IS MORE STRINGENT.
4. MINIMUM ALLOWABLE SLOPE FOR 4-INCH ROOF DRAIN LATERAL IS 2.08%.
5. MINIMUM ALLOWABLE SLOPE FOR 6-INCH ROOF DRAIN LATERAL IS 1.04%.
6. ROOF DRAIN LATERALS SHALL BE 6-INCH DIAMETER (SMOOTH-WALLED), UNLESS NOTED OTHERWISE ON THE PLANS.
- TELEPHONE, FIBER OPTIC, CABLE, AND GAS LINE SERVICES
1. CONTRACTOR SHALL HAVE 'MISS UTILITY' MARK EXISTING UTILITY LINES PRIOR TO START OF CONSTRUCTION AND AS NECESSARY THROUGHOUT CONSTRUCTION.
2. CONTRACTOR SHALL REVIEW PLANS TO VERIFY EXISTING LOCATIONS MARKED IN THE FIELD MATCH THOSE SHOWN ON THE PLANS.
3. CONTRACTOR SHALL NOTIFY ENGINEER OF ANY POTENTIAL DISCREPANCIES PRIOR TO THE START OF CONSTRUCTION.
4. CONTRACTOR SHALL POT-HOLE EXISTING UTILITIES AT CRITICAL CROSSING LOCATIONS PRIOR TO THE START OF CONSTRUCTION AND PROVIDE ENGINEER WITH LINE AND GRADE INFORMATION.
- BUILDING DOORS AND GRADES
1. A MINIMUM 5'X5' PAD SHALL BE INSTALLED AT ALL BUILDING DOOR LOCATIONS (MAXIMUM 2% SLOPE IN ANY DIRECTION). COMPLY WITH ADA DOOR CLEARANCE REQUIREMENTS FOR PAD POSITIONING OUTSIDE OF THE DOOR.
2. FINISHED GRADE SHALL BE 6-INCHES BELOW FINISHED FLOOR ELEVATION ALONG ALL BUILDING WALLS, IN AREAS WHERE PERVIOUS SURFACES ARE PROVIDED, UNLESS OTHERWISE NOTED. FINISHED GRADE FOR AREAS TO BE MULCHED SHALL BE AT TOP OF MULCH. FINISHED GRADE FOR AREAS TO RECEIVE SOD SHALL BE TO TOP OF SOD.
3. ALL PERVIOUS SURFACES SHALL BE INSTALLED WITH A MINIMUM OF 2% SLOPE AWAY FROM THE BUILDING (FOR A MINIMUM OF 10-FEET), TO PROVIDE FOR POSITIVE DRAINAGE.
4. CONTRACTOR SHALL COORDINATE LOCATION OF WEEP HOLES ALONG ALL BUILDING WALLS AND VERIFY REQUIRED SEPARATION BETWEEN WEEP HOLES AND FINISHED GRADES.
5. CONTRACTOR SHALL REVIEW GRADING ALONG BUILDINGS WITH STOREFRONTS TO VERIFY REQUIRED SEPARATION IS PROVIDED.

LANDSCAPE SPECIFICATIONS

3. USE EXISTING TOPSOIL AND/OR PROVIDE NEW TOPSOIL, WHICH IS FERTILE, FRIABLE, NATURAL LOAM, SURFACE SOIL, REASONABLY FREE OF SUBSOIL, FOREIGN MATTER AND ROOTS, STUMPS AND STONES LARGER THAN 2" IN DIMENSION.
4. CONTRACTOR SHALL ASCERTAIN LOCATION OF ALL UTILITIES PRIOR TO EXCAVATION.
5. CONTRACTOR SHALL MAINTAIN PLANT MATERIAL DURING INSTALLATION AND MAINTENANCE SHALL BE THE RESPONSIBILITY OF OWNER UPON ACCEPTANCE OF WORK.
6. WHERE THE LANDSCAPE WORK IS COMPLETED, THE OWNER'S REPRESENTATIVE WILL, UPON WRITTEN REQUEST, MAKE AN INSPECTION TO DETERMINE ACCEPTABILITY. IF WORK IS NOT ACCEPTABLE, REPLACE REJECTED WORK AND CONTINUE MAINTENANCE UNTIL REINSPECTION AND APPROVAL.
7. GUARANTEE ALL MATERIALS AND LABOR FOR 12 CALENDAR MONTHS AFTER ACCEPTANCE.
 - A. MAKE REPLACEMENTS OF ALL DEAD PLANTS IN IMPAIRED CONDITIONS IN EARLY FALL FOLLOWING PLANTING.
 - B. REPLACE ADDITIONAL MATERIAL IN THE EARLY SPRING WHICH ARE DEAD OR IMPAIRED DURING THE WINTER CONDITIONS.
8. WITHIN 10 DAYS AFTER ACCEPTANCE, THE CONTRACTOR SHALL DELIVER AN OUTLINE OF MAINTENANCE PROCEDURES RECOMMENDED FOR THIS PLANTING FOR THE OWNER.
9. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY DURING THE GUARANTEE PERIOD TO PROVIDE WRITTEN NOTICE TO THE OWNER OF ANY MAINTENANCE PRACTICE WHICH IN THEIR OPINION WILL AFFECT THE GUARANTEE IF NOT REMEDIED PROMPTLY.
10. DO NOT MAKE SUBSTITUTIONS. BID MATERIALS SHOWN ON PLANS. CONTRACTOR IS ENCOURAGED TO PROVIDE WRITTEN ALTERNATE LIST OF MATERIALS, SIZES AND NUMBERS SUBSTITUTION FOR COST-EFFECTIVE MAINTENANCE OF DESIGN INTEGRITY.
11. THE LANDSCAPE ARCHITECT RESERVES THE RIGHT TO ACCEPT OR REJECT ANY MATERIAL THAT HE/SHE DEEMS UNACCEPTABLE. REJECTED MATERIAL SHALL BE REMOVED PROMPTLY FROM THE SITE.
12. BALLED AND BURLAPPED PLANTS SHALL BE DUG WITH FIRM NATURAL BALLS OF EARTH. BALL SIZES SHALL BE IN ACCORDANCE WITH A.N.A. SPECIFICATIONS. ALL CONTAINER GROWN STOCK SHALL BE WELL ROOTED AND ESTABLISHED IN THE CONTAINER IN WHICH IT IS SOLD. AN ESTABLISHED CONTAINER GROWN PLANT SHALL HAVE A ROOT SYSTEM DEVELOPED SUFFICIENTLY TO RETAIN ITS SHAPE WHEN REMOVED FROM THE CONTAINER.
13. ALL PLANT MATERIAL SHALL BE NURSERY GROWN UNLESS OTHERWISE SPECIFIED. PRUNING SHALL BE DONE BEFORE PLANTING OR DURING THE PLANTING OPERATION.
14. ALL PLANT MATERIAL SHALL BE COVERED AND PROTECTED FROM EXCESSIVE DRYING DURING TRANSIT.
15. ANTIDISCICANTS SHALL BE APPLIED ON ALL MATERIAL DUG WHILE IN FOLIAGE.
16. MULCH MATERIAL SHALL BE EITHER SHREDDED HARDWOOD MULCH OR APPROVED EQUAL. MULCH MATERIAL SHALL BE MULCHING GRADE, UNIFORM IN SIZE AND FREE OF FOREIGN MATTER.
17. TOPSOIL MIXTURE SHALL BE 2 PARTS EXISTING SOIL MIXED EVENLY WITH 1 PART SPAGNUM PEAT MOSS OR PEAT HUMUS. EXISTING SOIL SHALL BE FREE OF STONES, LUMPS, PLANTS, ROOTS AND OTHER DEBRIS OVER 1 1/2 INCHES. IT SHALL NOT CONTAIN TOXIC SUBSTANCES HARMFUL TO PLANT GROWTH. TOPSOIL SHALL HAVE A PH RANGE OF 5.0 TO 7.0.
18. PLANTING PROCEDURES FOR TREES AND SHRUBS
 - A. PLANTING SHALL OCCUR IN ACCORDANCE WITH ALL DETAILS.
 - B. TREES AND SHRUBS SHALL BE PLACED IN THE PLANTING PIT, BY LIFTING FROM THE BALL (NEVER FROM THE BRANCHES OR TRUNK). ALL PLANT MATERIAL SHALL BE PLACED IN A STRAIGHT POSITION WITHIN THE PLANTING PIT WITH THE MOST DESIRABLE SIDE PLACING TOWARDS THE PROMINENT VIEW (SIDEWALK, STREET, ETC.).
 - C. THE TREE PIT SHALL BE BACKFILLED WITH A SOIL MIXTURE AS PER SPECIFICATIONS. THE PIT SHALL BE FILLED HALFWAY INITIALLY AND TAMPED FIRMLY. ALL ROPES, WIRES, ETC. ON THE ROOTBALL SHALL BE CUT AND THE BURLAP OR BALL WRAP PULLED BACK TO THE EDGE OF THE ROOTBALL. COMPLETE BACKFILLING PLANT PIT AND TAMP FIRMLY. BACKFILL SOIL SHALL NOT COVER TOP OF ROOTBALL. MULCH ROOTBALL AND SAUCER WITH MINIMUM OF 3 INCHES SHREDDED OR CHIPPED HARDWOOD OR PINE MULCH. WATER THOROUGHLY OR UNTIL PLANT PIT IS FILLED.



www.balzer.co

New River Valley
Richmond
Roanoke
Shenandoah Valley

RESIDENTIAL LAND DEVELOPMENT ENGINEERING
SITE DEVELOPMENT ENGINEERING
LAND USE PLANNING & ZONING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ARCHITECTURE
STRUCTURAL ENGINEERING
TRANSPORTATION ENGINEERING
ENVIRONMENTAL & SOIL SCIENCE
WETLAND DELINEATIONS & STREAM EVALUATION


Balzer and Associates, Inc.

1208 Corporate Cir

Roanoke, VA 24011

540-772-9580

1 AX 340-772-803

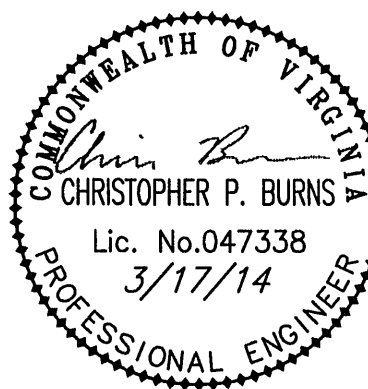

HALEY TOYOTA DEALERSHIP

NOTES

CITY OF ROANOKE, VIRGINIA

DRAWN BY BTC

DESIGNED BY BTC

CHECKED BY CPB

DATE 12/12/2013

REVISIONS:
2/10/2014
3/17/2014

APPROVED
JUN 04 2014

SHEET NO.

C23

JOB NO. R1300046.00