

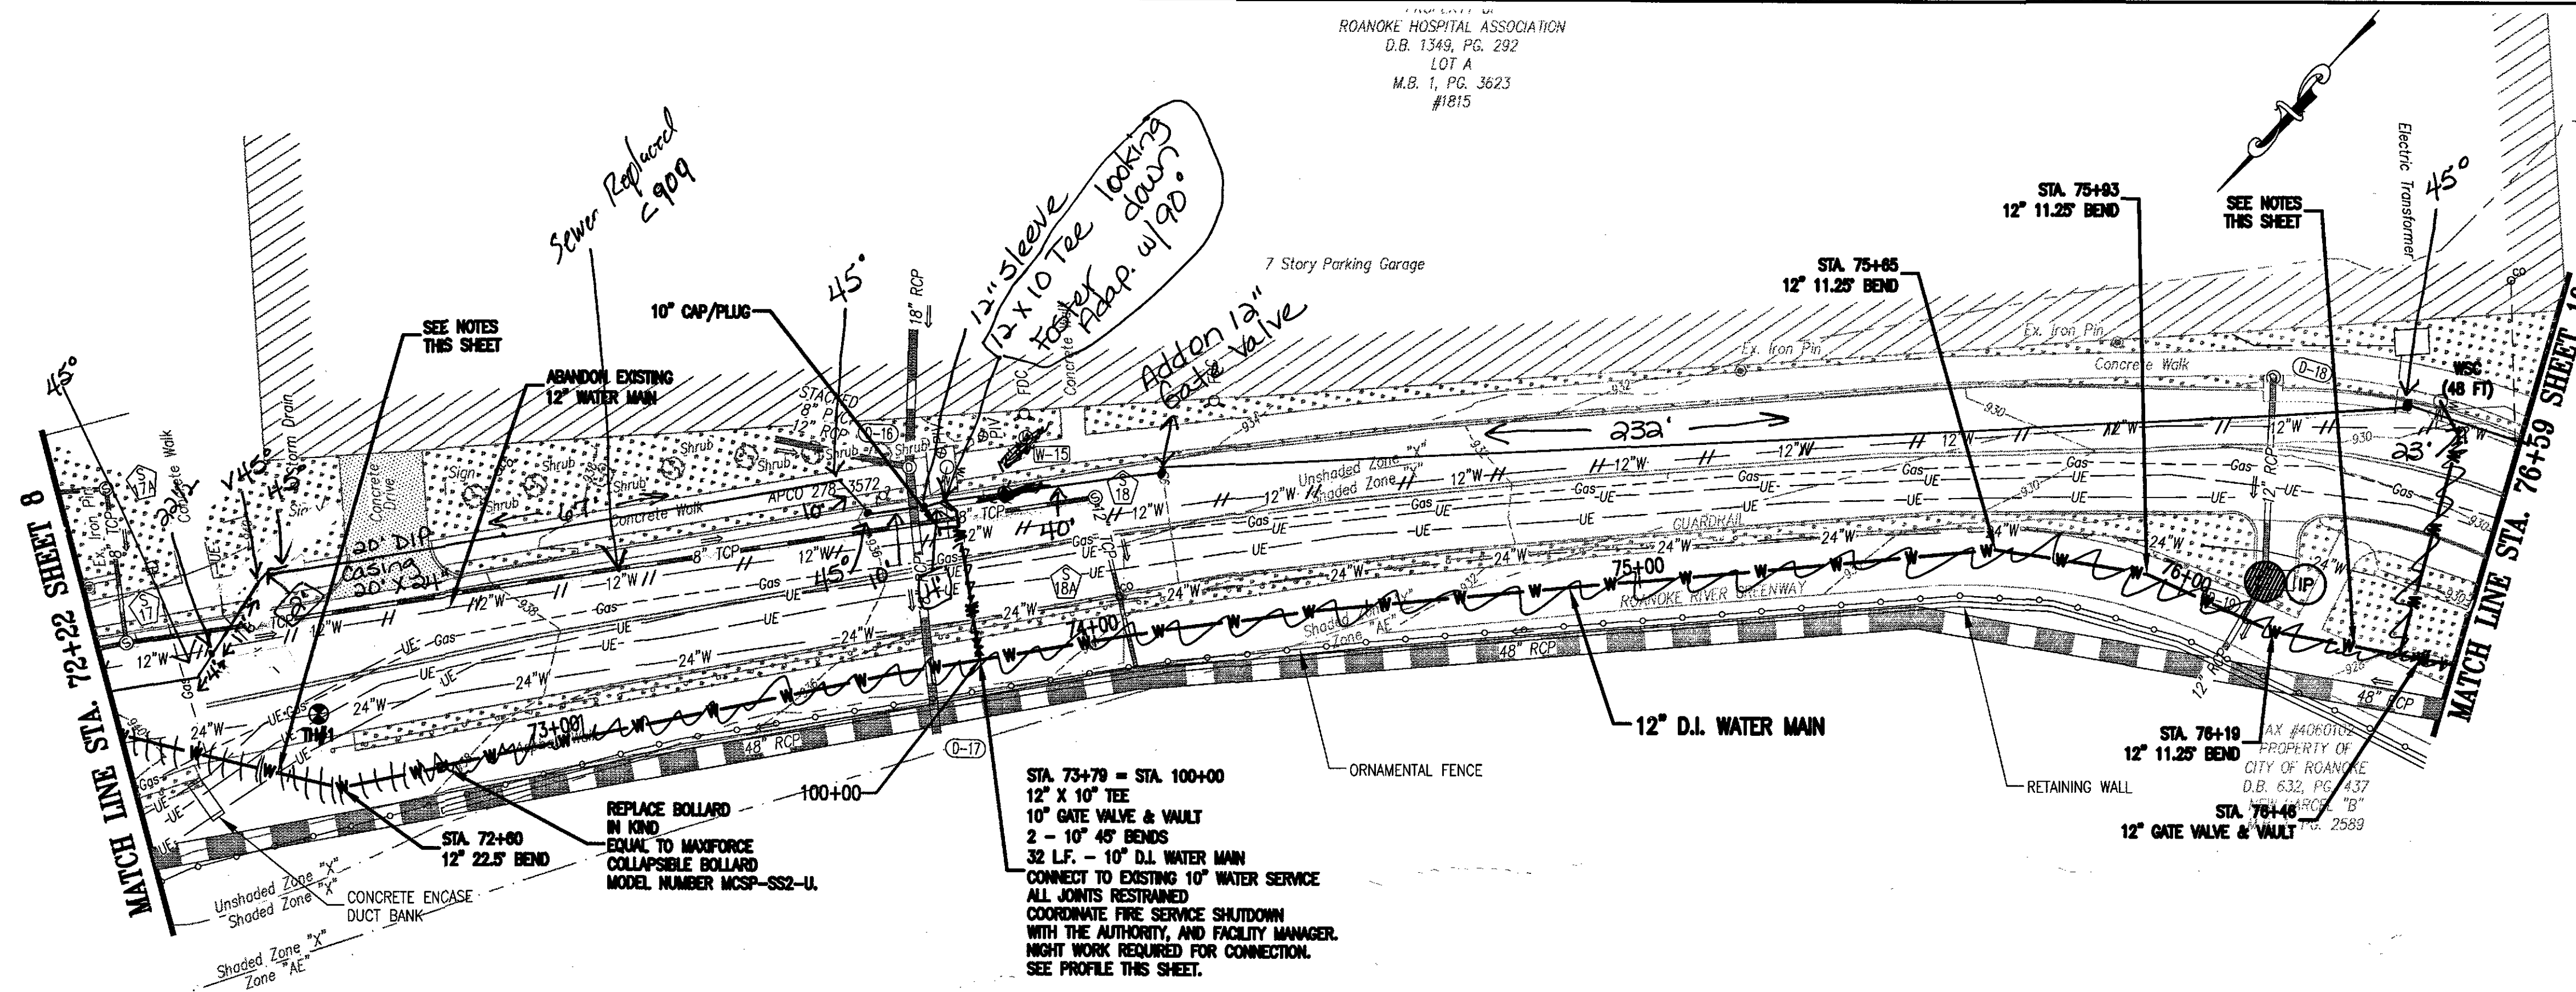


ROANOKE HOSPITAL ASSOCIATION
D.B. 1349, PG. 292
LOT A
M.B. 1, PG. 3623
#1815

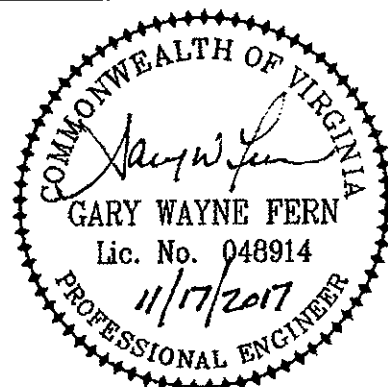

ROANOKE RIVER GREENWAY NOTES:

1. NOTIFY CITY OF ROANOKE PARKS & GREENWAY PLANNER, DONNIE UNDERWOOD, AT 540-853-2236, AT LEAST TWO WEEKS IN ADVANCE OF GREENWAY CLOSURE. SEE MAINTENANCE OF TRAFFIC PLANS FOR GREENWAY CLOSURE SIGNAGE AND OTHER REQUIREMENTS.
2. CONTRACTOR SHALL VIDEO RECORD AND SUBMIT GREENWAY IMMEDIATELY PRIOR TO ANY CONSTRUCTION.
3. CONTRACTOR SHALL COMPLETE ALL WORK IMPACTING THE GREENWAY WITHIN A THREE WEEK PERIOD, AND SHALL WORK CONTINUOUSLY THROUGHOUT THIS PERIOD WITHIN NORMAL WORKING HOURS UNTIL THE WORK IS COMPLETE INCLUDING TESTING AND RESTORATION. NO EQUIPMENT SHALL BE STORED WITHIN THE GREENWAY OUTSIDE OF THIS THREE WEEK PERIOD.
4. WHEN WORKING ALONG THE ROANOKE RIVER GREENWAY AND IN THE VICINITY OF THE SEGMENTAL RETAINING WALL SYSTEM, CONTRACTOR SHALL TAKE ALL MEASURES NECESSARY TO PROTECT THE EXISTING RETAINING WALL AND ORNAMENTAL FENCE. AT A MINIMUM, THE FOLLOWING PRECAUTIONS SHALL BE TAKEN.
 - A. CONTRACTOR SHALL AVOID TURNING MOVEMENTS WITH EQUIPMENT AND VEHICLES WHEN OPERATING WITHIN 10- FEET OF THE WALL FACE.
 - B. WHEN EXCAVATING BEHIND THE WALL, CONTRACTOR MAY ENCOUNTER LAYERS OF GEOTEXTILE FABRIC AND SHALL AVOID PULLING OR TUGGING ON THEM. THE FABRIC MAY BE CUT NEATLY OR LAID BACK.
 - C. IF EXISTING GEOTEXTILE FABRIC IS CUT, CONTRACTOR SHALL REPLACE SHEETS OF EQUIVALENT FABRIC SO THAT THE REPLACEMENT SHEETS OVERLAP EXISTING FABRIC BY AT LEAST 2- FEET HORIZONTALLY AND 3- INCHES VERTICALLY. REPLACEMENT SHEETS SHALL EXTEND ALONG THE LENGTH OF THE WALL IN ONE PIECE AND SHALL EXTEND AT LEAST 10- FEET FROM THE FACE OF THE WALL, MEASURED PERPENDICULAR TO THE WALL.
 - D. IF EXISTING GEOTEXTILE FABRIC IS ADEQUATELY PRESERVED, CONTRACTOR SHALL RELAY IT WITHIN THE BACKFILL, MAINTAINING ITS HORIZONTAL POSITION.
 - E. BACKFILL MATERIAL SHALL BE 218 STONE AND SHALL BE COMPACTED TO 95% OF STANDARD PROCTOR IN BETWEEN SHEETS OF GEOTEXTILE FABRIC.
 - F. IF #57 STONE IS ENCOUNTERED, CONTRACTOR SHALL RETAIN OR REPLACE THE STONE AS NEEDED TO MAINTAIN THE INTEGRITY OF THE WALL AND DRAINAGE THROUGH THE WALL.
5. CONTRACTOR SHALL PROTECT EXISTING ORNAMENTAL FENCE AND BOLLARDS FROM DAMAGE. ANY IMPROVEMENTS DAMAGED DUE TO CONSTRUCTION SHALL BE REPLACED IN KIND BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER. ORNAMENTAL FENCE SHALL BE EQUAL TO MASTER HALCO ECHELON II INDUSTRIAL ALUMINUM MAJESTIC 3- RAIL.
6. CONTRACTOR SHALL RESTORE TRAIL BASE AND SURFACE MATERIALS TO MATCH EXISTING CONDITIONS AND SHALL PROVIDE FULL WIDTH OVERLAY PAVING PRIOR TO FINAL APPROVAL.

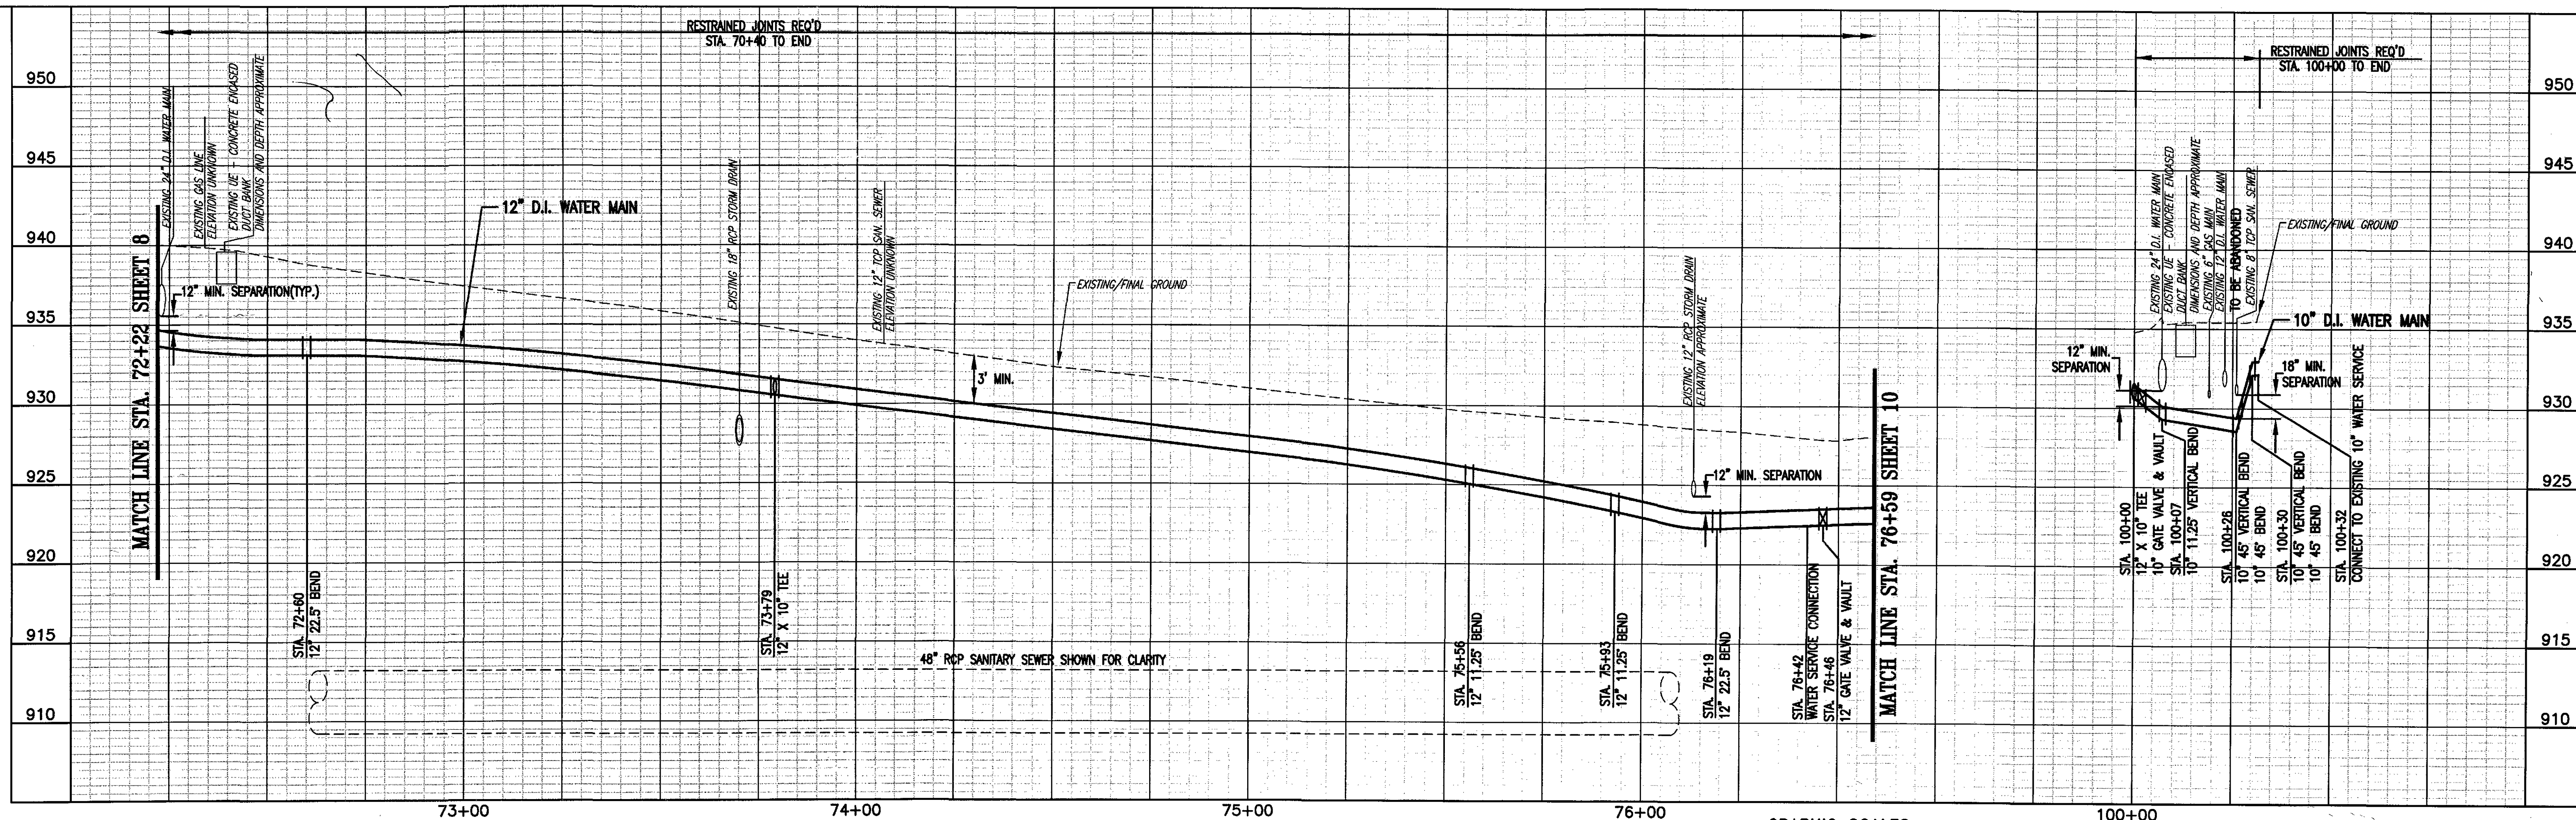

WRA
Whitman, Reardon & Associates, LLP
1700 Kraft Dr, Suite 1200, Blacksburg, VA 24060


WESTERN VIRGINIA WATER AUTHORITY
601 South Jefferson Street, Suite 300
Roanoke, Virginia 24011

DES: PJM
DRAWN: JES
CHECK: GWP
DATE: 11/17/17

SCALE: AS SHOWN
HORIZ: 1" = 20'
VERT: 1" = 5'

HAMILTON TERRACE WATER MAIN REPLACEMENT

GRAPHIC SCALES

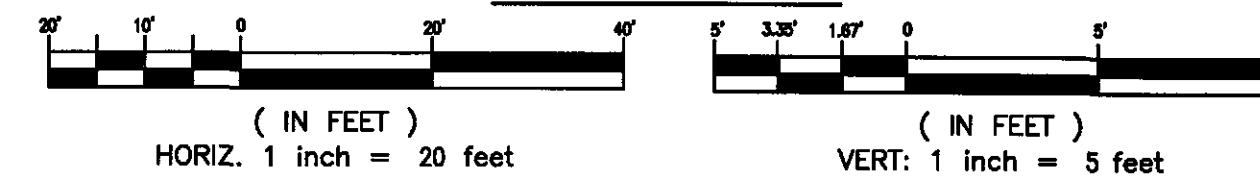

PLAN - PROFILE
STA. 72+22 TO STA. 76+59
STA. 100+00 TO STA. 100+32

REV	DATE	DESCRIPTION

DRAWING	SHEET
	9