


COMM # 7120

APPROVED:

APPROVED: SHEETS 2 & 3 OF 3 SHEETS

PLAN	DATE	BY	CHKD
DESIGNED	9-55	R.C.M.	R.C.M.
PLOTTED	9-55	R.C.M.	R.C.M.
NOTE BOOK			
ALIGNMENT CHECKED			
BY: AT WAY CHECKED			
NO. 13-56			

PROFILE	DATE	BY	CHKD
DESIGNED	9-55	R.C.M.	R.C.M.
PLOTTED	9-55	R.C.M.	R.C.M.
NOTE BOOK			
ALIGNMENT CHECKED			
BY: AT WAY CHECKED			
NO. 13-56			


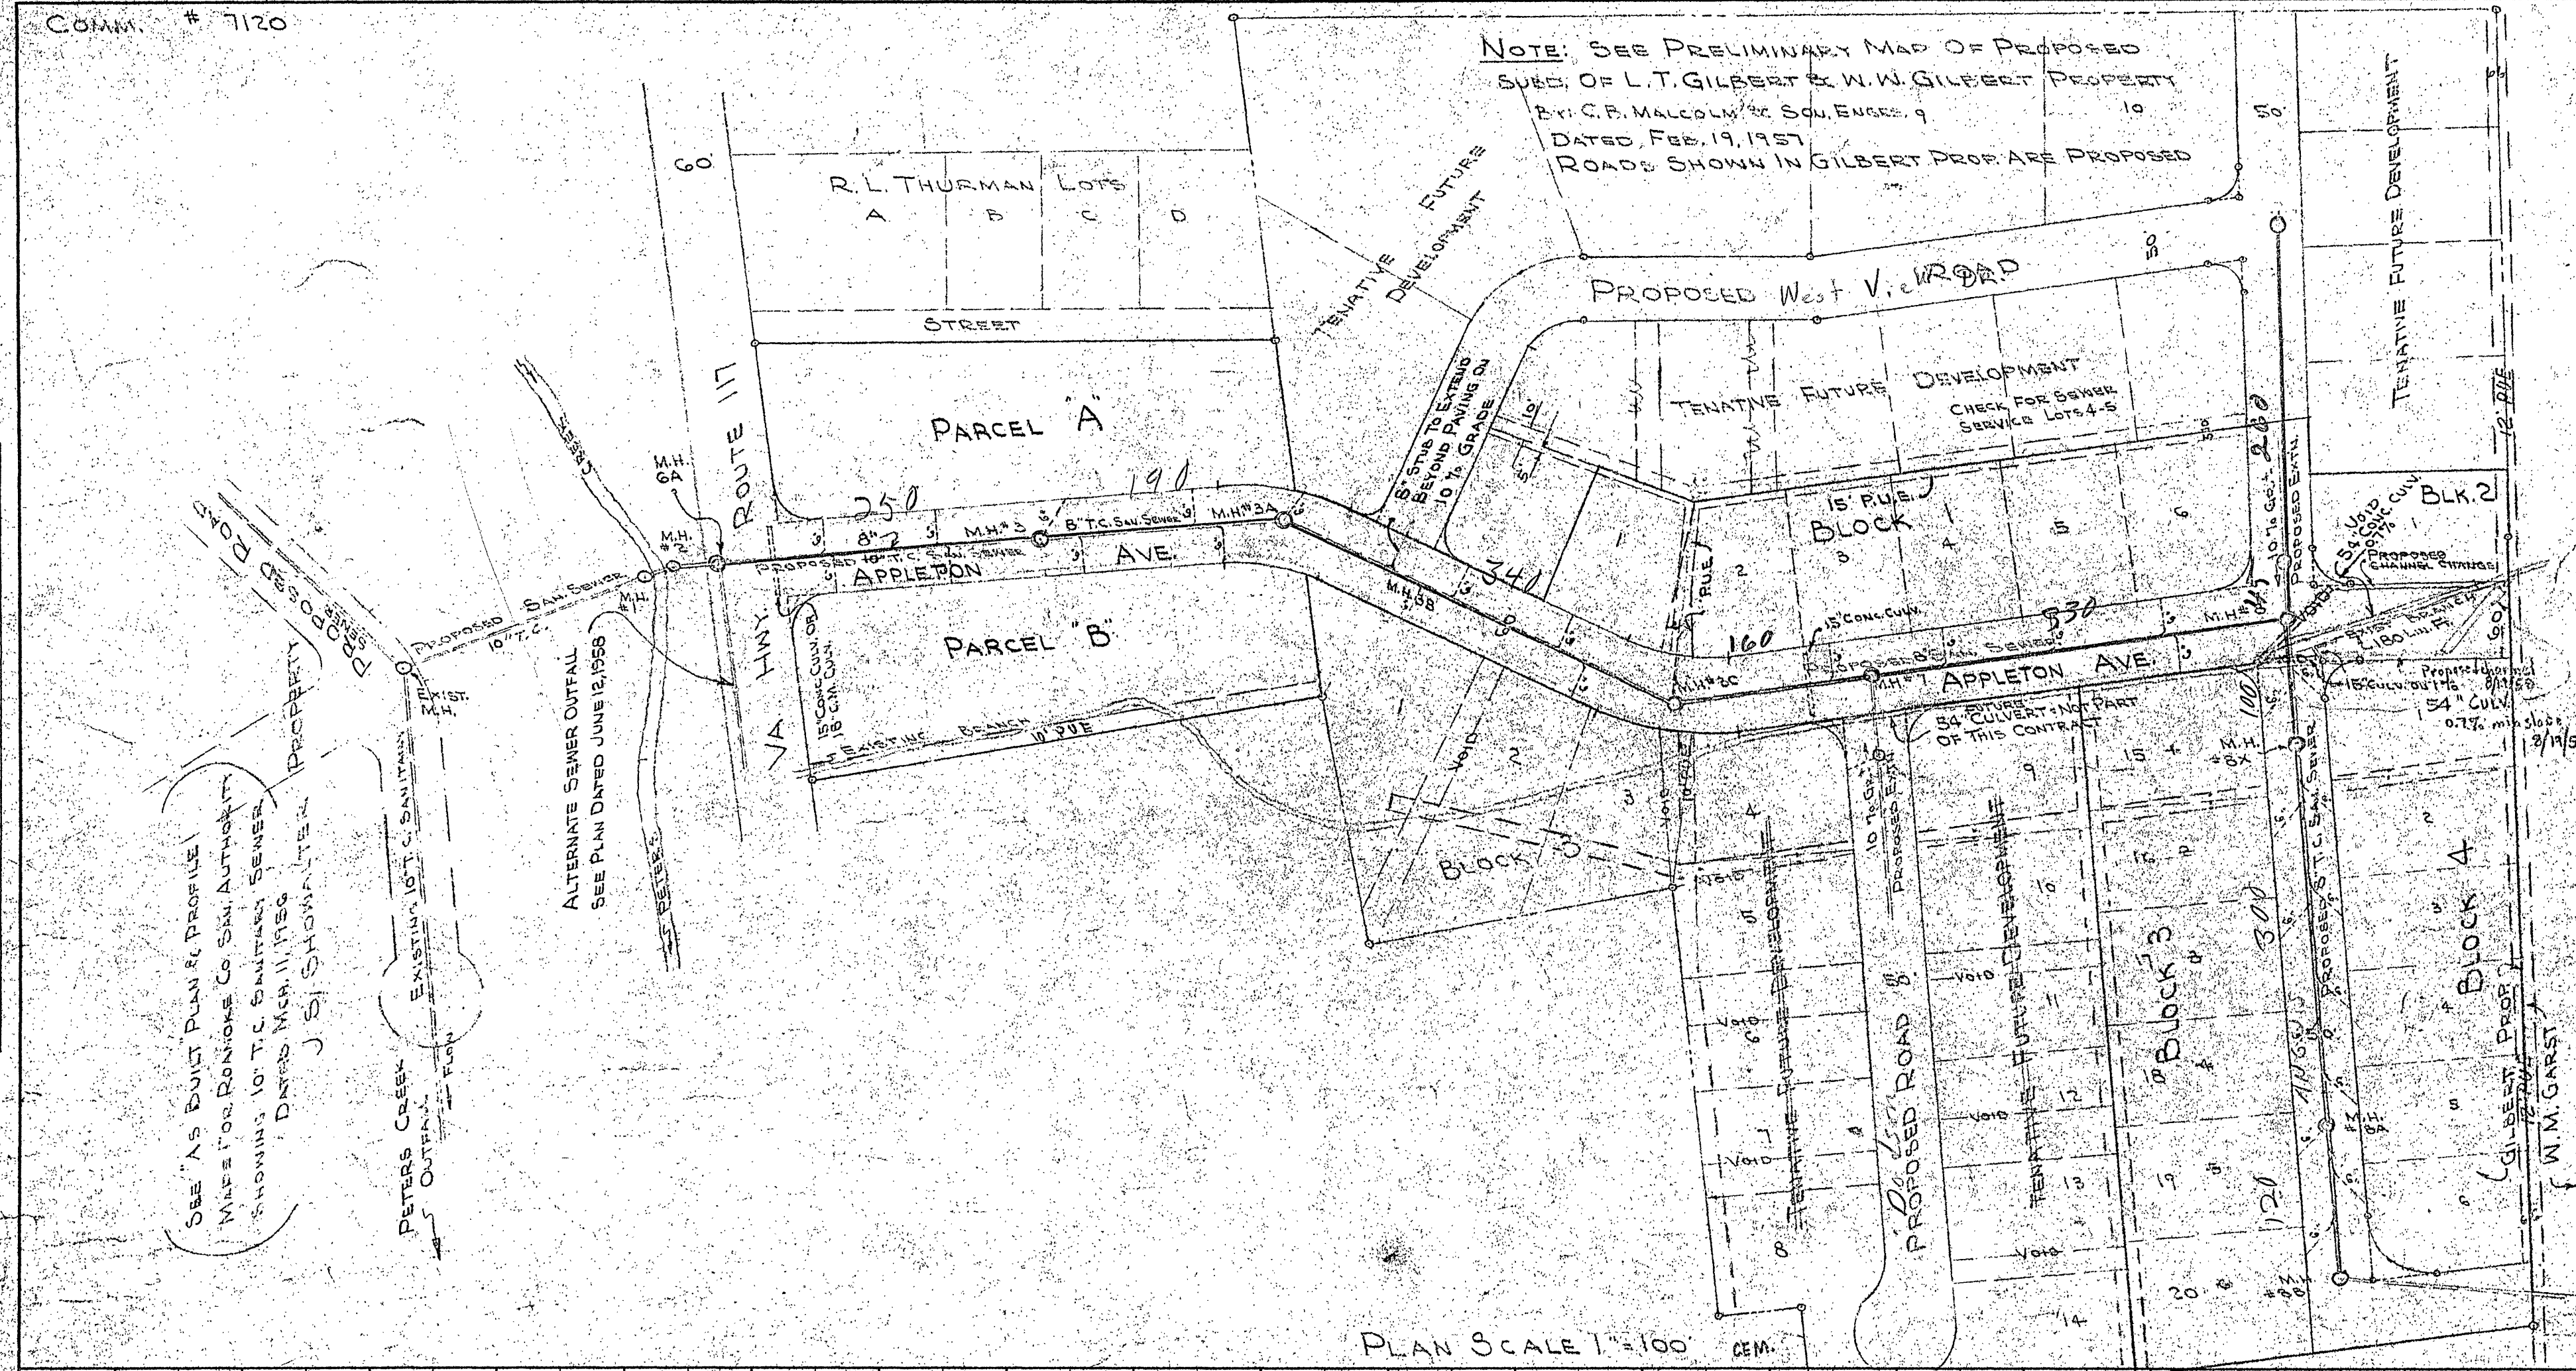


NOTE: STREET AND SEWER GRADES TENTATIVE. ADDITIONAL CULVERTS MAY BE REQUIRED - STUDY NOT COMPLETE

GENERAL NOTES:

1. SEWER TO BE CONSTRUCTED IN ACCORDANCE WITH ROANOKE COUNTY SANITATION AUTHORITY & ROANOKE CITY SPECIFICATIONS.
2. INFILTRATION FOR SEWER SYSTEM NOT TO EXCEED 1 GALLON PER LINEAL FT. OF 8" MAIN PER 24 HOUR DAY.
3. MANHOLE LIDS TO CONTAIN WORDS "ROANOKE SEWER COUNTY".
4. EXTRA STRENGTH PIPE TO BE USED WHERE COVER EXCEEDS 10 FT.
5. WHERE PROPOSED EXTENSION IS INDICATED LINE TO BE SLOPED AND PLUGGED AT MANHOLES.
6. THE DISTANCE FROM EXISTING M.H. AT PETERS CREEK TO M.H. # 20, 05571, LINEAL FEET.
7. 10" OR 8" BELL AND SPIGOT CONCRETE SEWER PIPE AS MANUFACTURED OR IN CONFORMANCE WITH TYPE MACHINE FOR USE WITH REINFORCED FLEXIBLE RUBBER GASKETS MAY BE SUBSTITUTED FOR N.C. PIPE WHENEVER EXISTING GROUND WATER IS ENCOUNTERED. RUBBER GASKET 1/2" MIN. IS USED.
8. WHERE AT LEAST 2' COVER IS NOT AVAILABLE OVER PIPE, USE 6" CONC. CUP (SEE DETAIL).

TYPICAL STREET SECTION

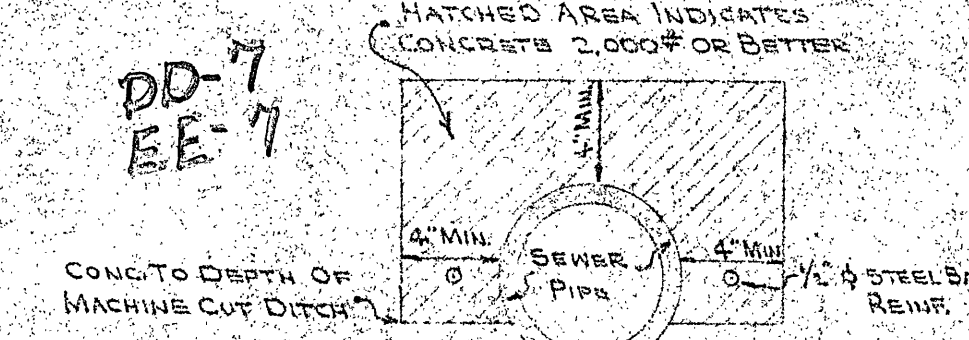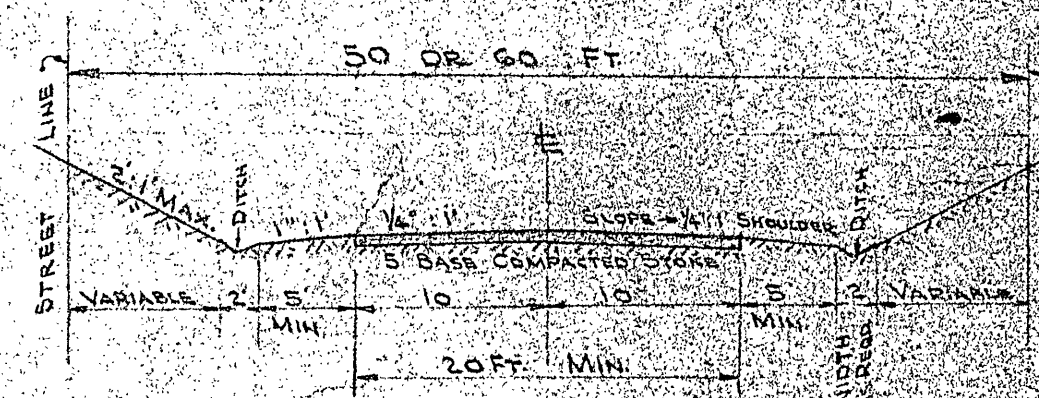

NOTE: IF MACADAM IS WIDENED, SHOULDER MUST REMAIN 5' WIDE AND DITCH LOCATION SHIFT STORM DRAIN AS REQUIRED TO BE INSTALLED.

