



**TYPICAL SECTION
20'x6" SOIL AGGREGATE BASE COURSE TYPE I
BITUMINUS SURFACE TREATMENT
30'-32' ROADWAY**

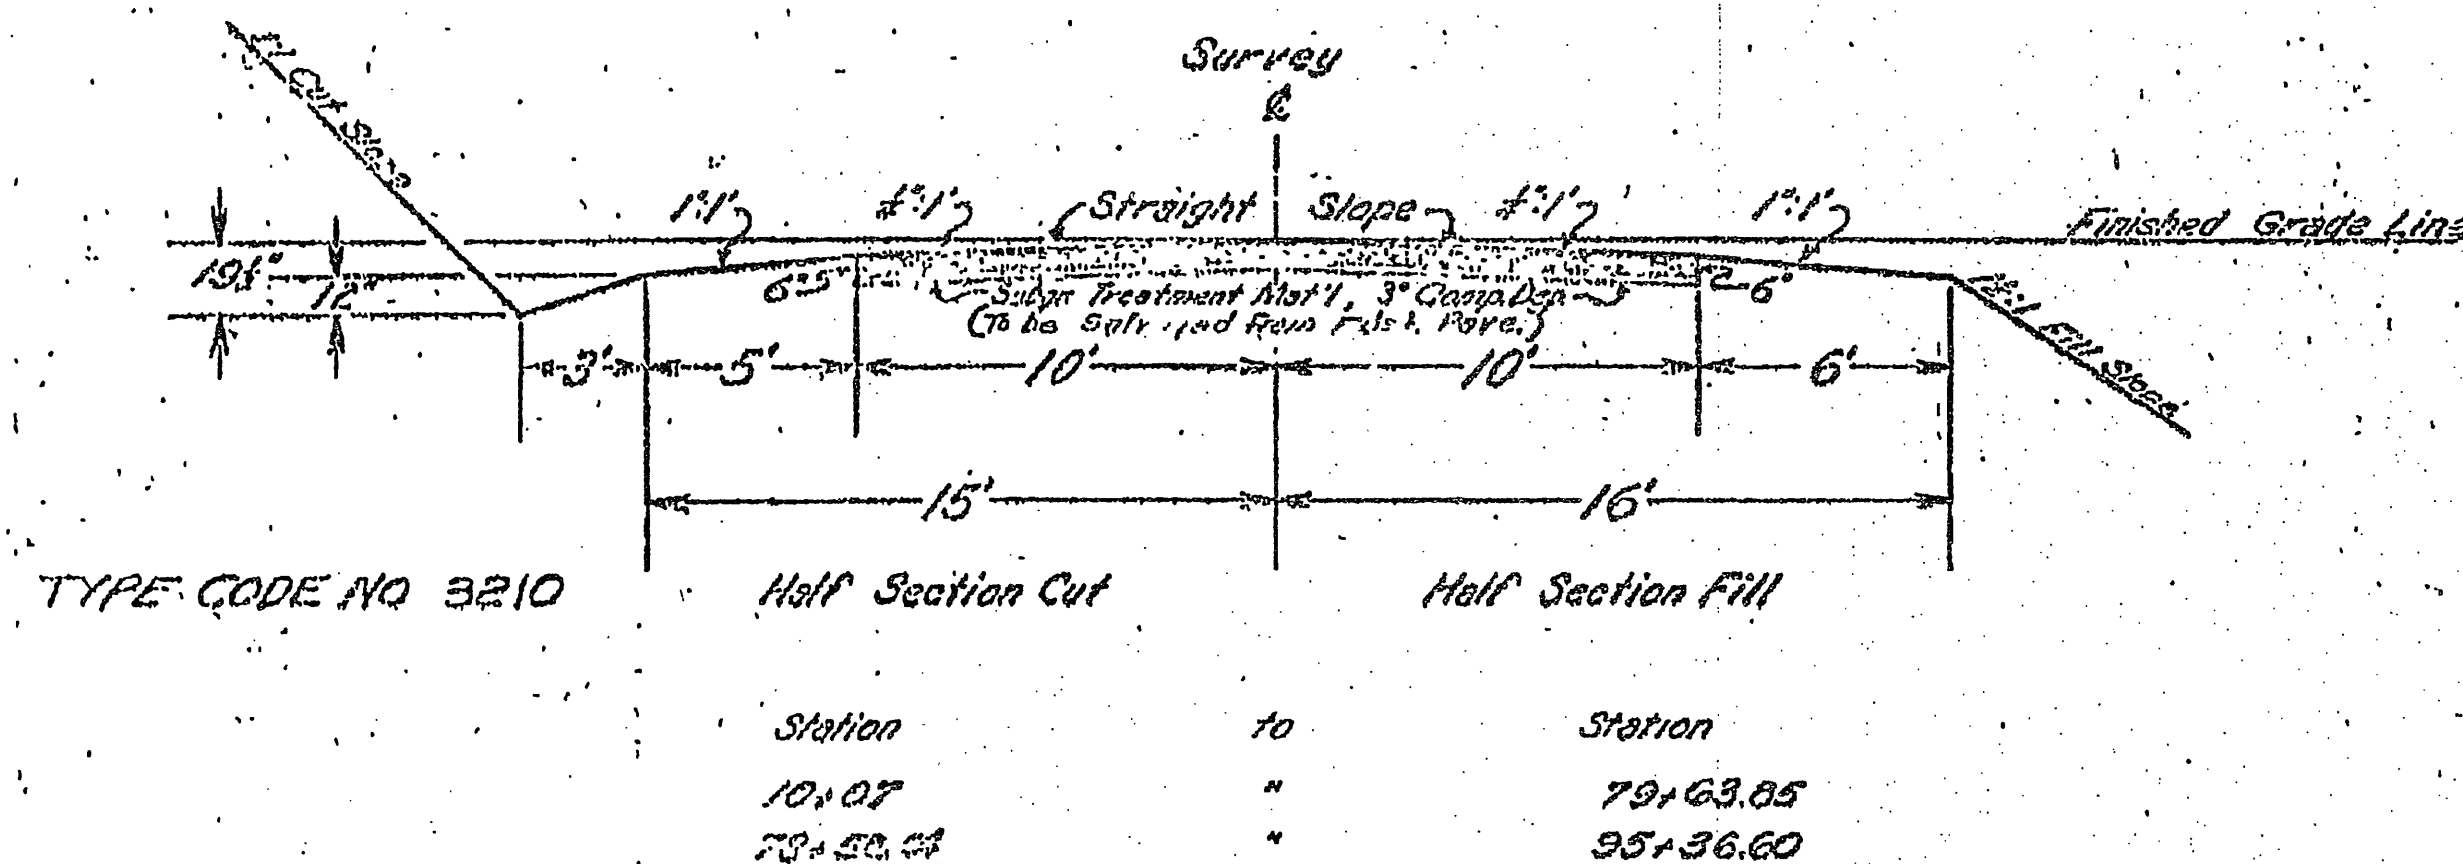

**TYPICAL SECTION
VAR. x 6" SOIL AGGREGATE BASE COURSE TYPE I
BITUMINUS SURFACE TREATMENT
VAR. ROADWAY**

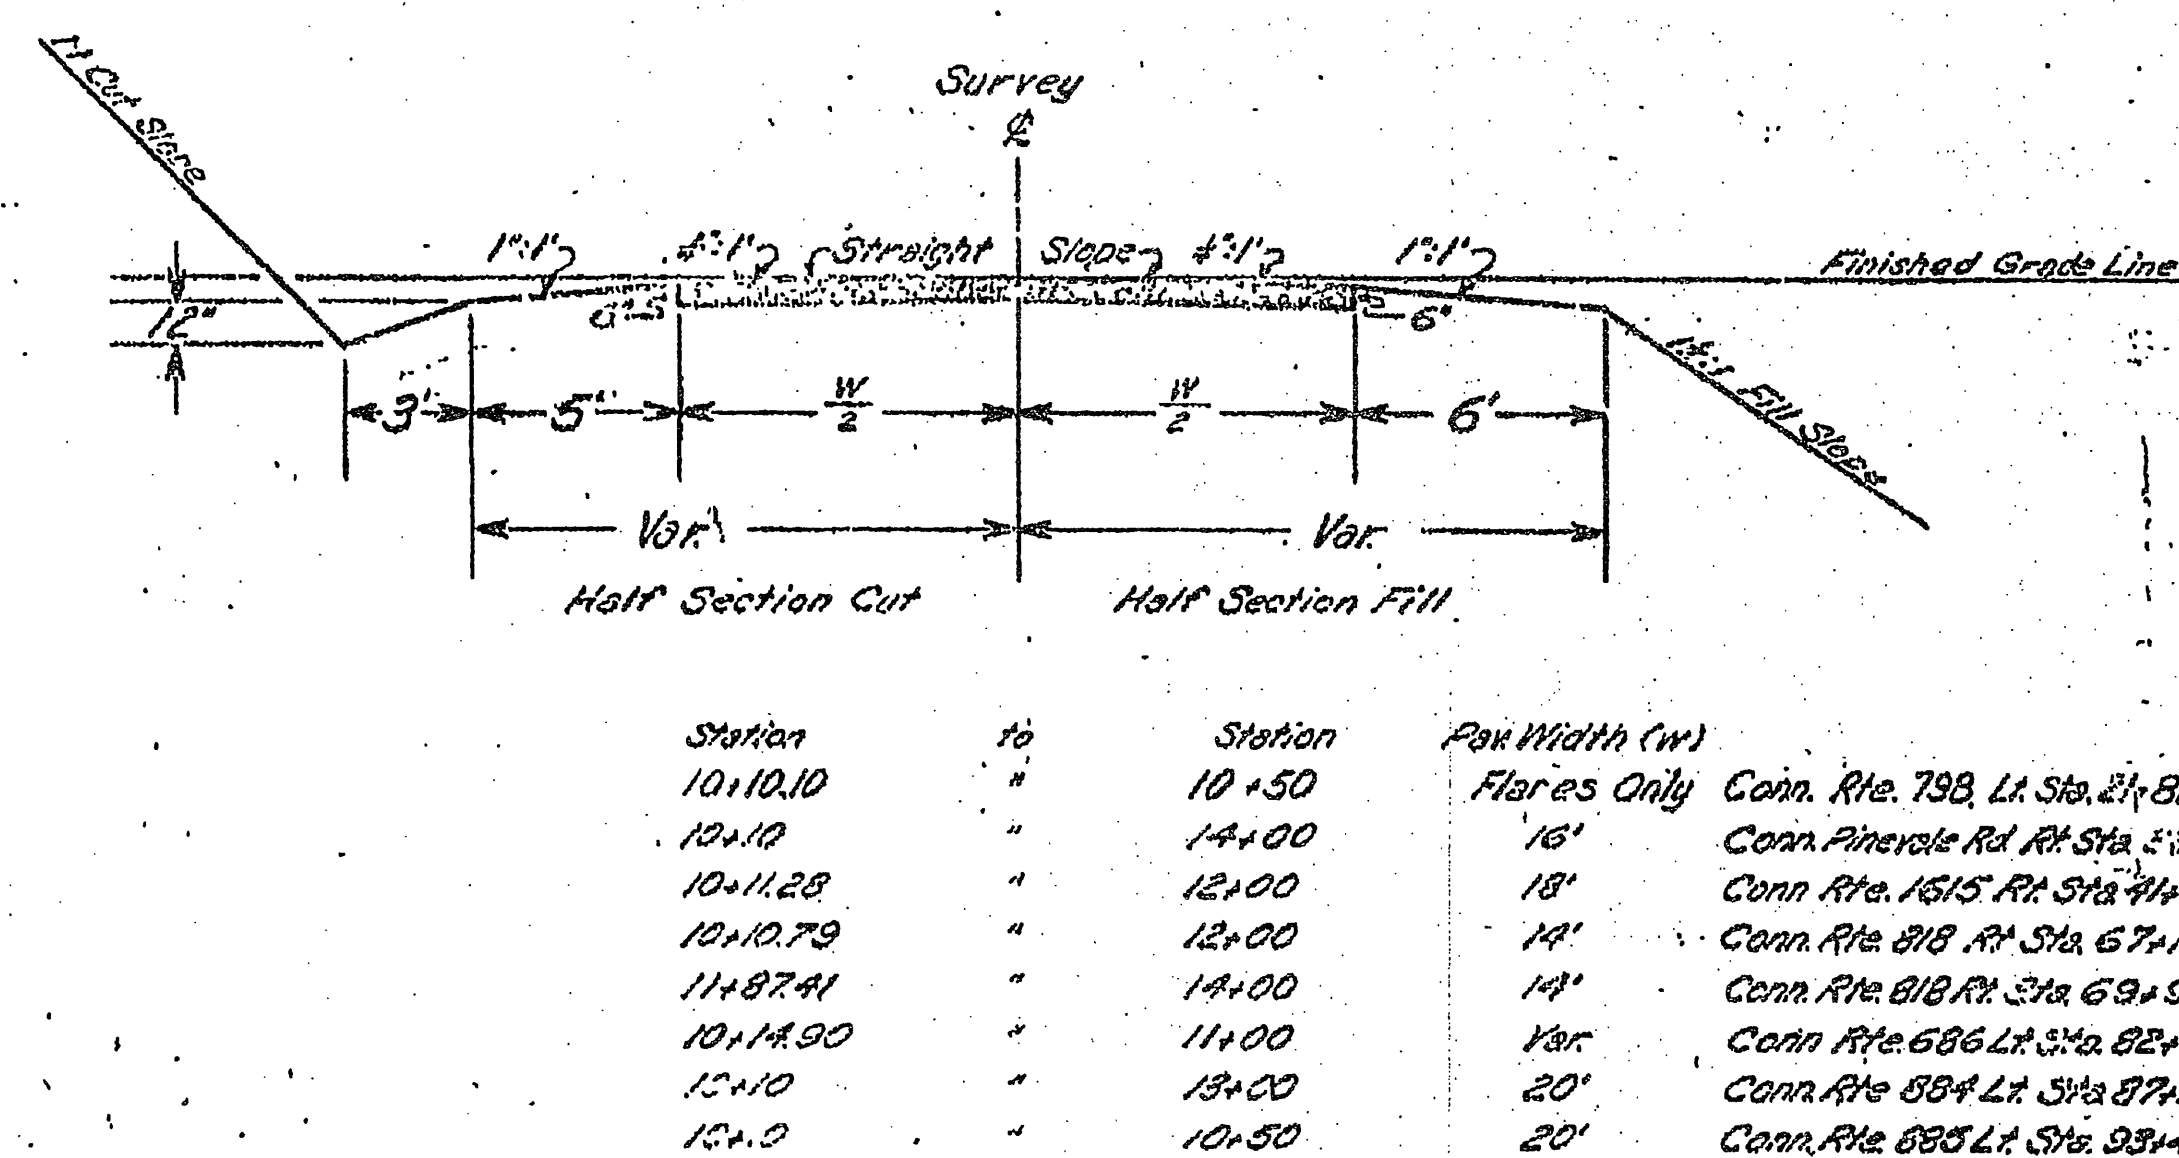

GENERAL NOTES

GRADING

The grade line denotes top of finished pavement unless shown otherwise on typical sections or plans. All slopes are to be finished in accordance with typical sections, except where otherwise noted.

DRAINAGE

The locations of all drainage structures shown on these plans are approximate only, with the exception of culverts showing specific stations and special design bridges.

INCIDENTALS

The Contractor shall take into consideration all permanent and temporary pipe lines and appurtenances in their present or relocated positions, whether or not they are shown on the plans. He will be required to carry on his work around such pipe lines or utility appurtenances at his risk using suitable precaution to prevent damage to same. Any sewer lines, water mains, fire hydrants, manholes, or other utilities which are to be moved or adjusted, shall be moved or adjusted by the owners at their expense.

INCIDENTALS (Cont'd)


That portion of the right of way lying within 20 feet of the center line or within the limits of the construction slopes beyond 20 feet shall be cleared and grubbed in accordance with the Specifications, Section 301.02, where sufficient right of way is provided.

Exceptions

Sound, firmly rooted trees, the bases of which are located 7 or more feet above the grade of the center line, and beyond the limits of construction. Certain other trees to be preserved as noted on the plans or as directed by the Engineer.

PAVEMENT

The entire old pavement is to be removed (with exceptions as noted on the plans) and stockpiled for use as subgrade treatment material as directed by the Engineer. Old pavement removed outside of construction limits will be paid for at the unit price bid for "Units of Old Road to be Removed." Old pavement removed from within construction limits is to be paid for at the unit price bid for "Culverts Regular Excavation."

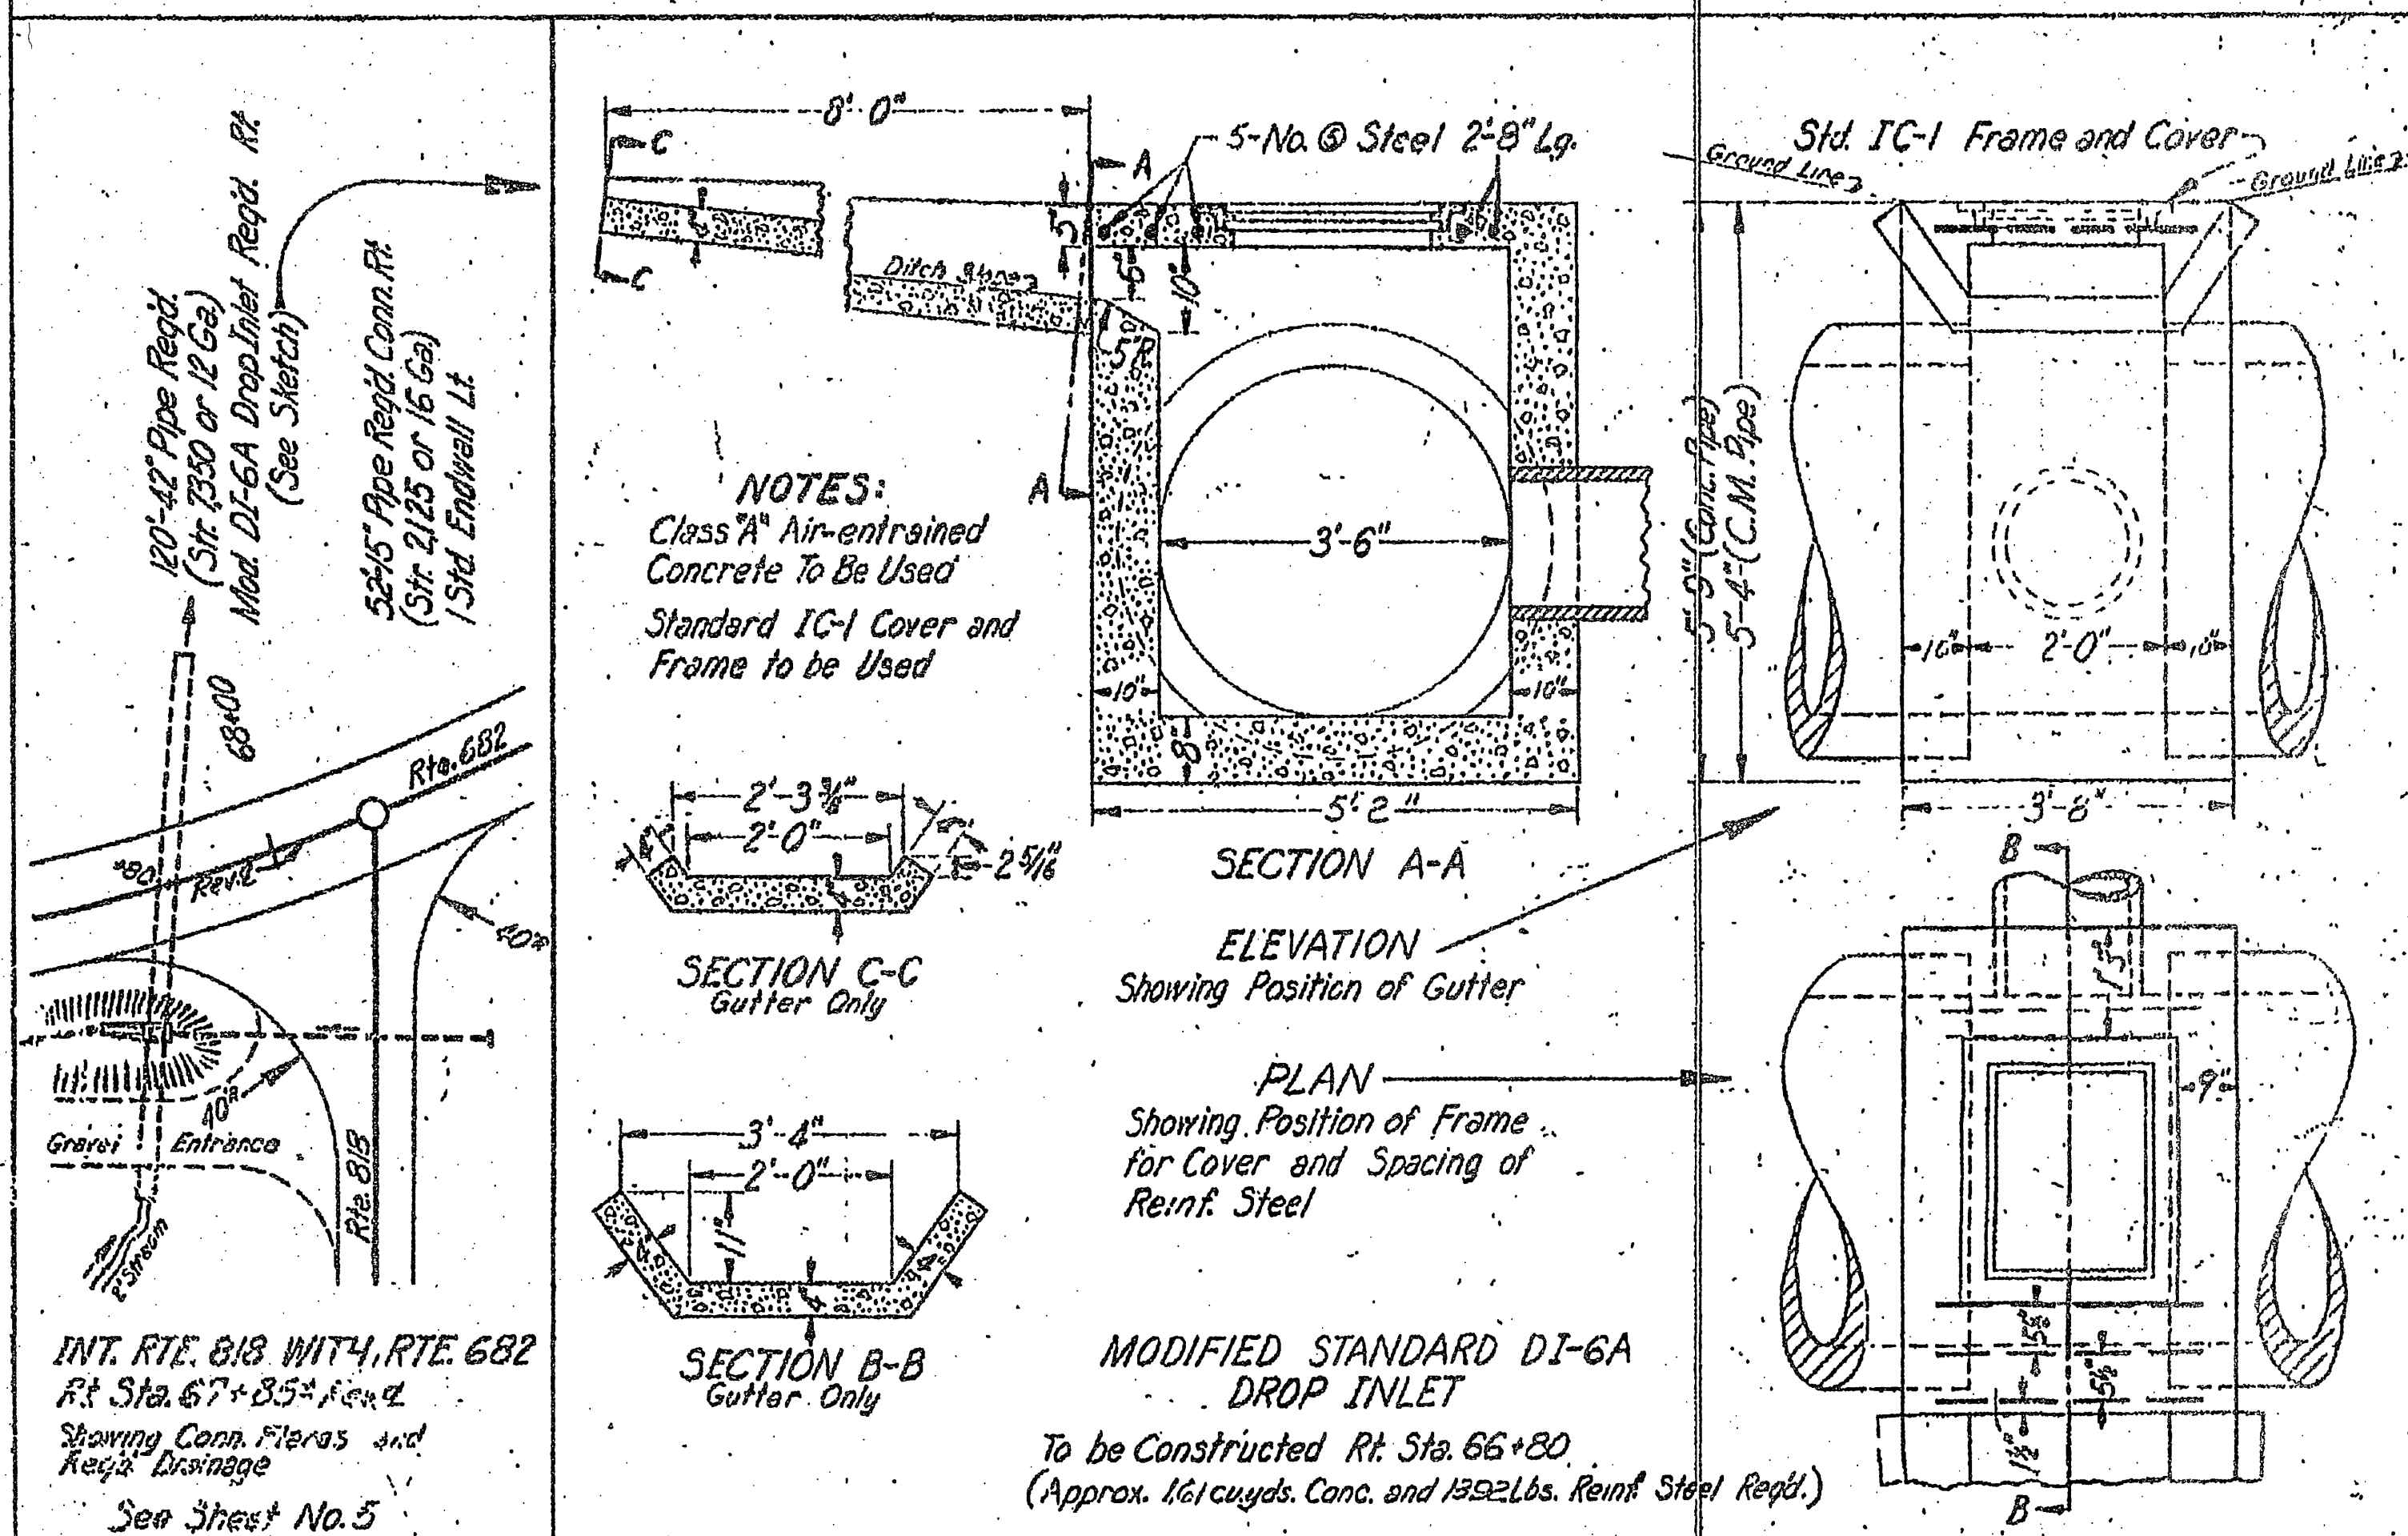

15482 07-91