


P.R.V. Δ - DENOTES PRESSURE REDUCING VALVE REQ'D. TO BE INSTALLED BY DEVELOPER.

NOTE: LIMITS OF (PG-2A) PAVED GUTTER TO BE DETERMINED DURING CONSTRUCTION

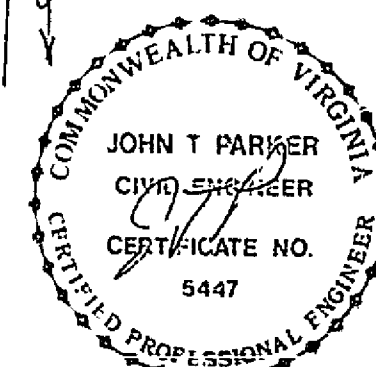

WATER DISTRIBUTION SUMMARY **	
TOTAL JOB	
10-INCH D.I. PIPE, CLASS 50	3200 LF
6-INCH D.I. PIPE, CLASS 50	3160 LF
4-INCH D.I. PIPE, CLASS 50	650 LF
10" x 10" TEES	1 EA
10" x 6" TEES	8 EA
6" x 6" TEES	10 EA
10" x 4" TEES	1 EA
10" x 6" CROSSES	2 EA
6" x 6" CROSSES	2 EA
10-INCH GATE VALVES AND VAULTS	10 EA
6-INCH GATE VALVES AND VAULTS	22 EA
4-INCH GATE VALVES AND VAULTS	1 EA
FIRE HYDRANT ASSEMBLIES	12 EA
10-INCH BLOW OFFS	5 EA
6-INCH BLOW OFFS	8 EA
4-INCH BLOW OFFS	1 EA
DOUBLE METER CONNECTIONS	77 EA
SINGLE METER CONNECTIONS	12 EA
AUTOMATIC AIR RELEASE VALVES	3 EA
10" x 1 1/4" BENDS (IF REQUIRED)	1 EA
6" x 1 1/4" BENDS (IF REQUIRED)	5 EA
THRUST BLOCKS	16 EA

**** ENGINEER'S NOTE:**

QUANTITIES SHOWN ARE ESTIMATED AND ARE PROVIDED AS INFORMATION TO THE CONTRACTOR. THE ENGINEER DOES NOT EXPRESSLY OR BY IMPLICATION GUARANTEE THAT THE ACTUAL QUANTITIES INVOLVED WILL CORRESPOND EXACTLY WITH THE QUANTITIES SHOWN. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES SHOWN.

K&E PL. 1 PLAN PROFILE
KUEPPEL & ESSER CO.
48 701 MADE IN U.S.A.

RC-1866