This topographic survey of Lewiston Street, Drainage Project was completed under the direct and responsible charge of, Loren W. Knighting from an actual [X] Ground or [ ] Airborne survey made under my supervision; that the imagery and/or original data was obtained on October 15, 2014; and that this plat, map, or digital geospatial data including metadata meets minimum accuracy standards unless otherwise noted.

L. W. Knighting 4/22/2015

## NOTES:

1.) Source of Meridian: Virginia State Plane, South Zone, (NAD 83) based upon: static gps sessions performed by Draper Aden Associates personnel.
2.) Vertical datum: (NAVD 88) based upon: static gps sessions performed by Draper Aden Associates personnel.
3.) This survey was prepared without the benefit of a title commitment or title report and all easements and encumbrances that might be disclosed in a title search may not be shown.
4.) Utilities shown are based upon:
___SUE Quality Level D, ASCE 38–02 – compiled records only
___SUE Quality Level C, ASCE 38–02 – visible evidence in conjunction with compiled records.
_X_SUE Quality Level B, ASCE 38–02 – field designation of underground utilities performed by (Miss Utility, Ticket # A427501699 ; Other) and visible evidence in conjunction with compiled records.
___SUE Quality Level A, ASCE 38–02 – test pits at locations shown hereon performed by (DAA; Other) in conjunction with field designation of underground utilities performed by (DAA; Miss Utility, Ticket # _____ ; Other), visible evidence and compiled records.
___No SUE was performed or requested for this survey. Utilities shown hereon are based on field observation only.
5.) This topographic survey of Lewiston Street, Drainage Project was completed under the direct and responsible charge of Loren W. Knighting from an actual Ground survey made under my supervision; that the imagery and/or original data was obtained October 15, 2014; and that this plat and/or map meets minimum accuracy standards unless otherwise noted.
6.) Contour Interval: 1'.
7.) This survey was prepared for City of Roanoke. Draper Aden Associates assumes no liability for reuse or modification of this document.
8.) Property lines shown hereon are compiled from record information.
9.) Draper Aden Associates provides benchmarks for the construction of the improvements shown on these plans. All other existing elevations are for reference to existing conditions only. Do not use spot elevations, finish floor elevations, elevations on manholes, elevations on survey nails, survey hubs, control points (horizontal points provided) or any other points for construction other than the provided benchmarks. Failure to utilize and verify the provided benchmarks could result in damages and additional cost that are the contractor's responsibility.

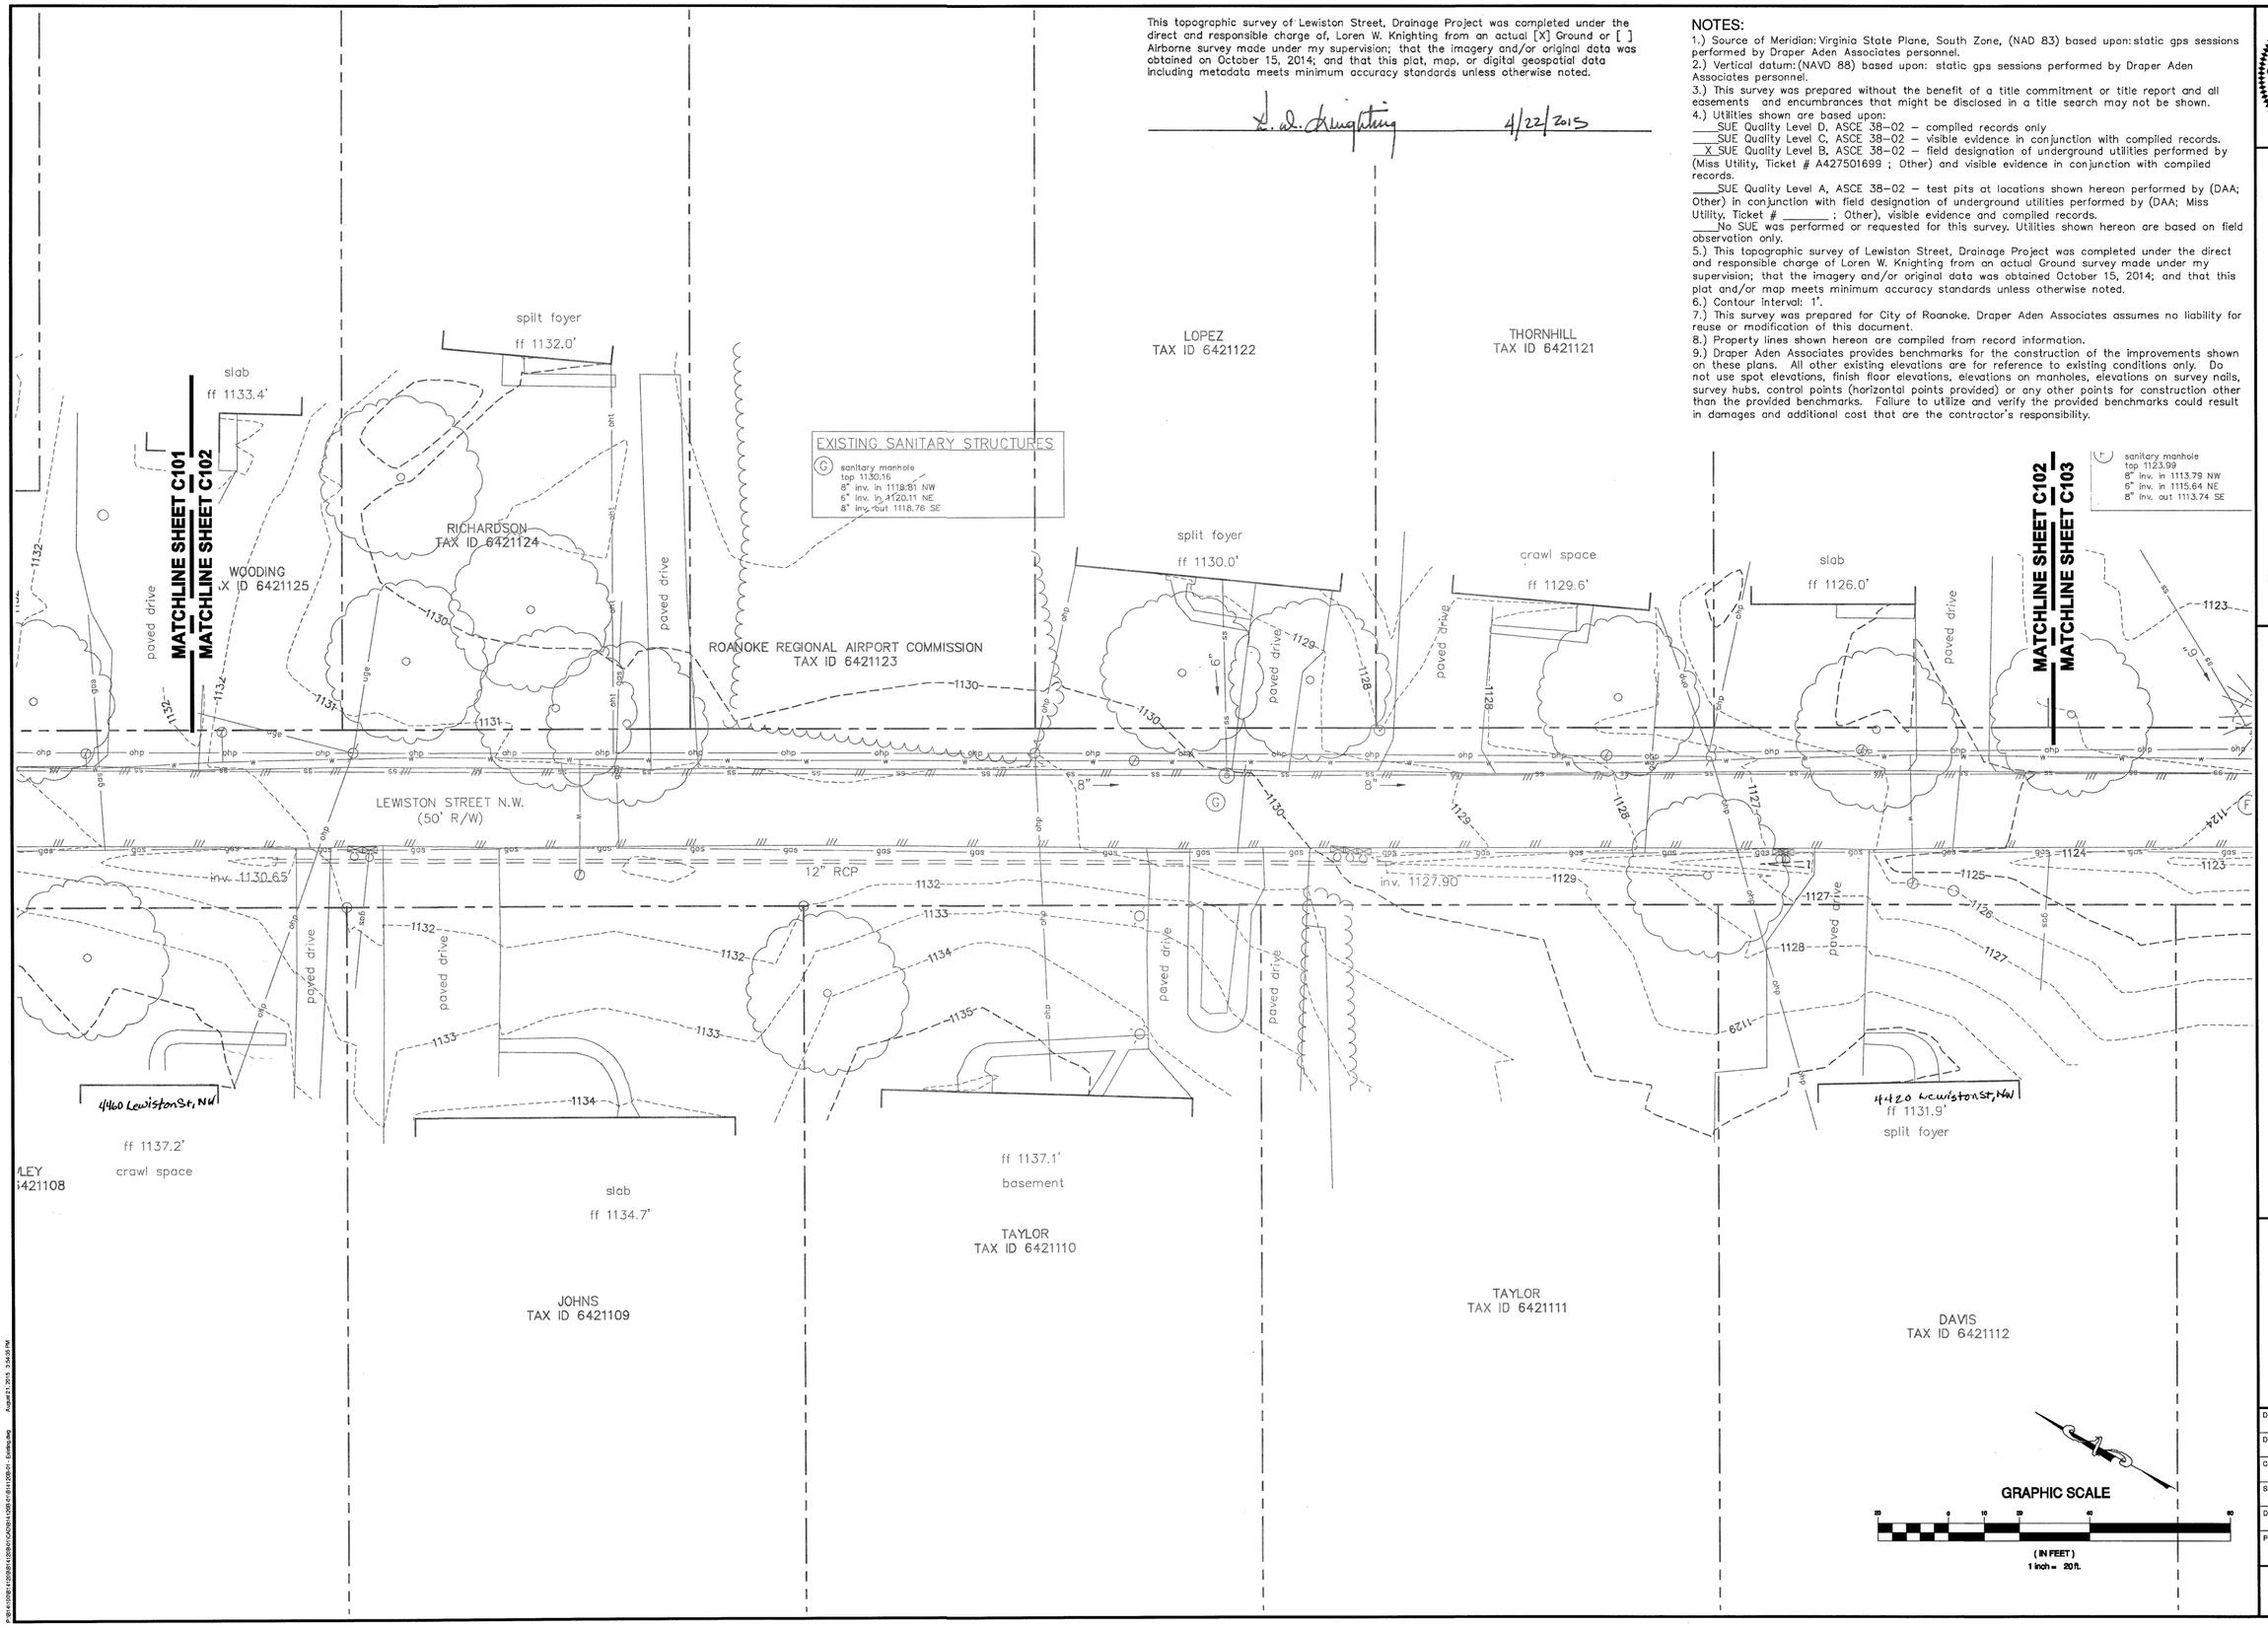


COMMONWEALTH OF VIRGINIA
L. W. KNIGHTING
Lic. No. 1460
4/22/2015
LAND SURVEYOR


Draper Aden Associates
Engineering • Surveying • Environmental Services
Richmond, VA
Charlottesville, VA
Hampton Roads, VA
Blacksburg, VA
2206 South Main Street
Blacksburg, VA 24060
540-552-0444 Fax: 540-552-0291
www.daa.com


# EXISTING CONDITIONS
# LAUREL RIDGE RD / LEWISTON ST DRAINAGE IMPROVEMENTS
ROANOKE, VIRGINIA

**REVISIONS**

| | |
|---|---|
| DESIGNED BY: | DAA |
| DRAWN BY: | JFF |
| CHECKED BY: | LWK |
| SCALE: | 1" = 20' |
| DATE: | APRIL 22, 2015 |
| PROJECT NUMBER: | B14120B-01 |

C102

P:\B14120B\14120B01\DAA\B14120B-01 - Existing.dwg August 21, 2015 3:54:06 PM