


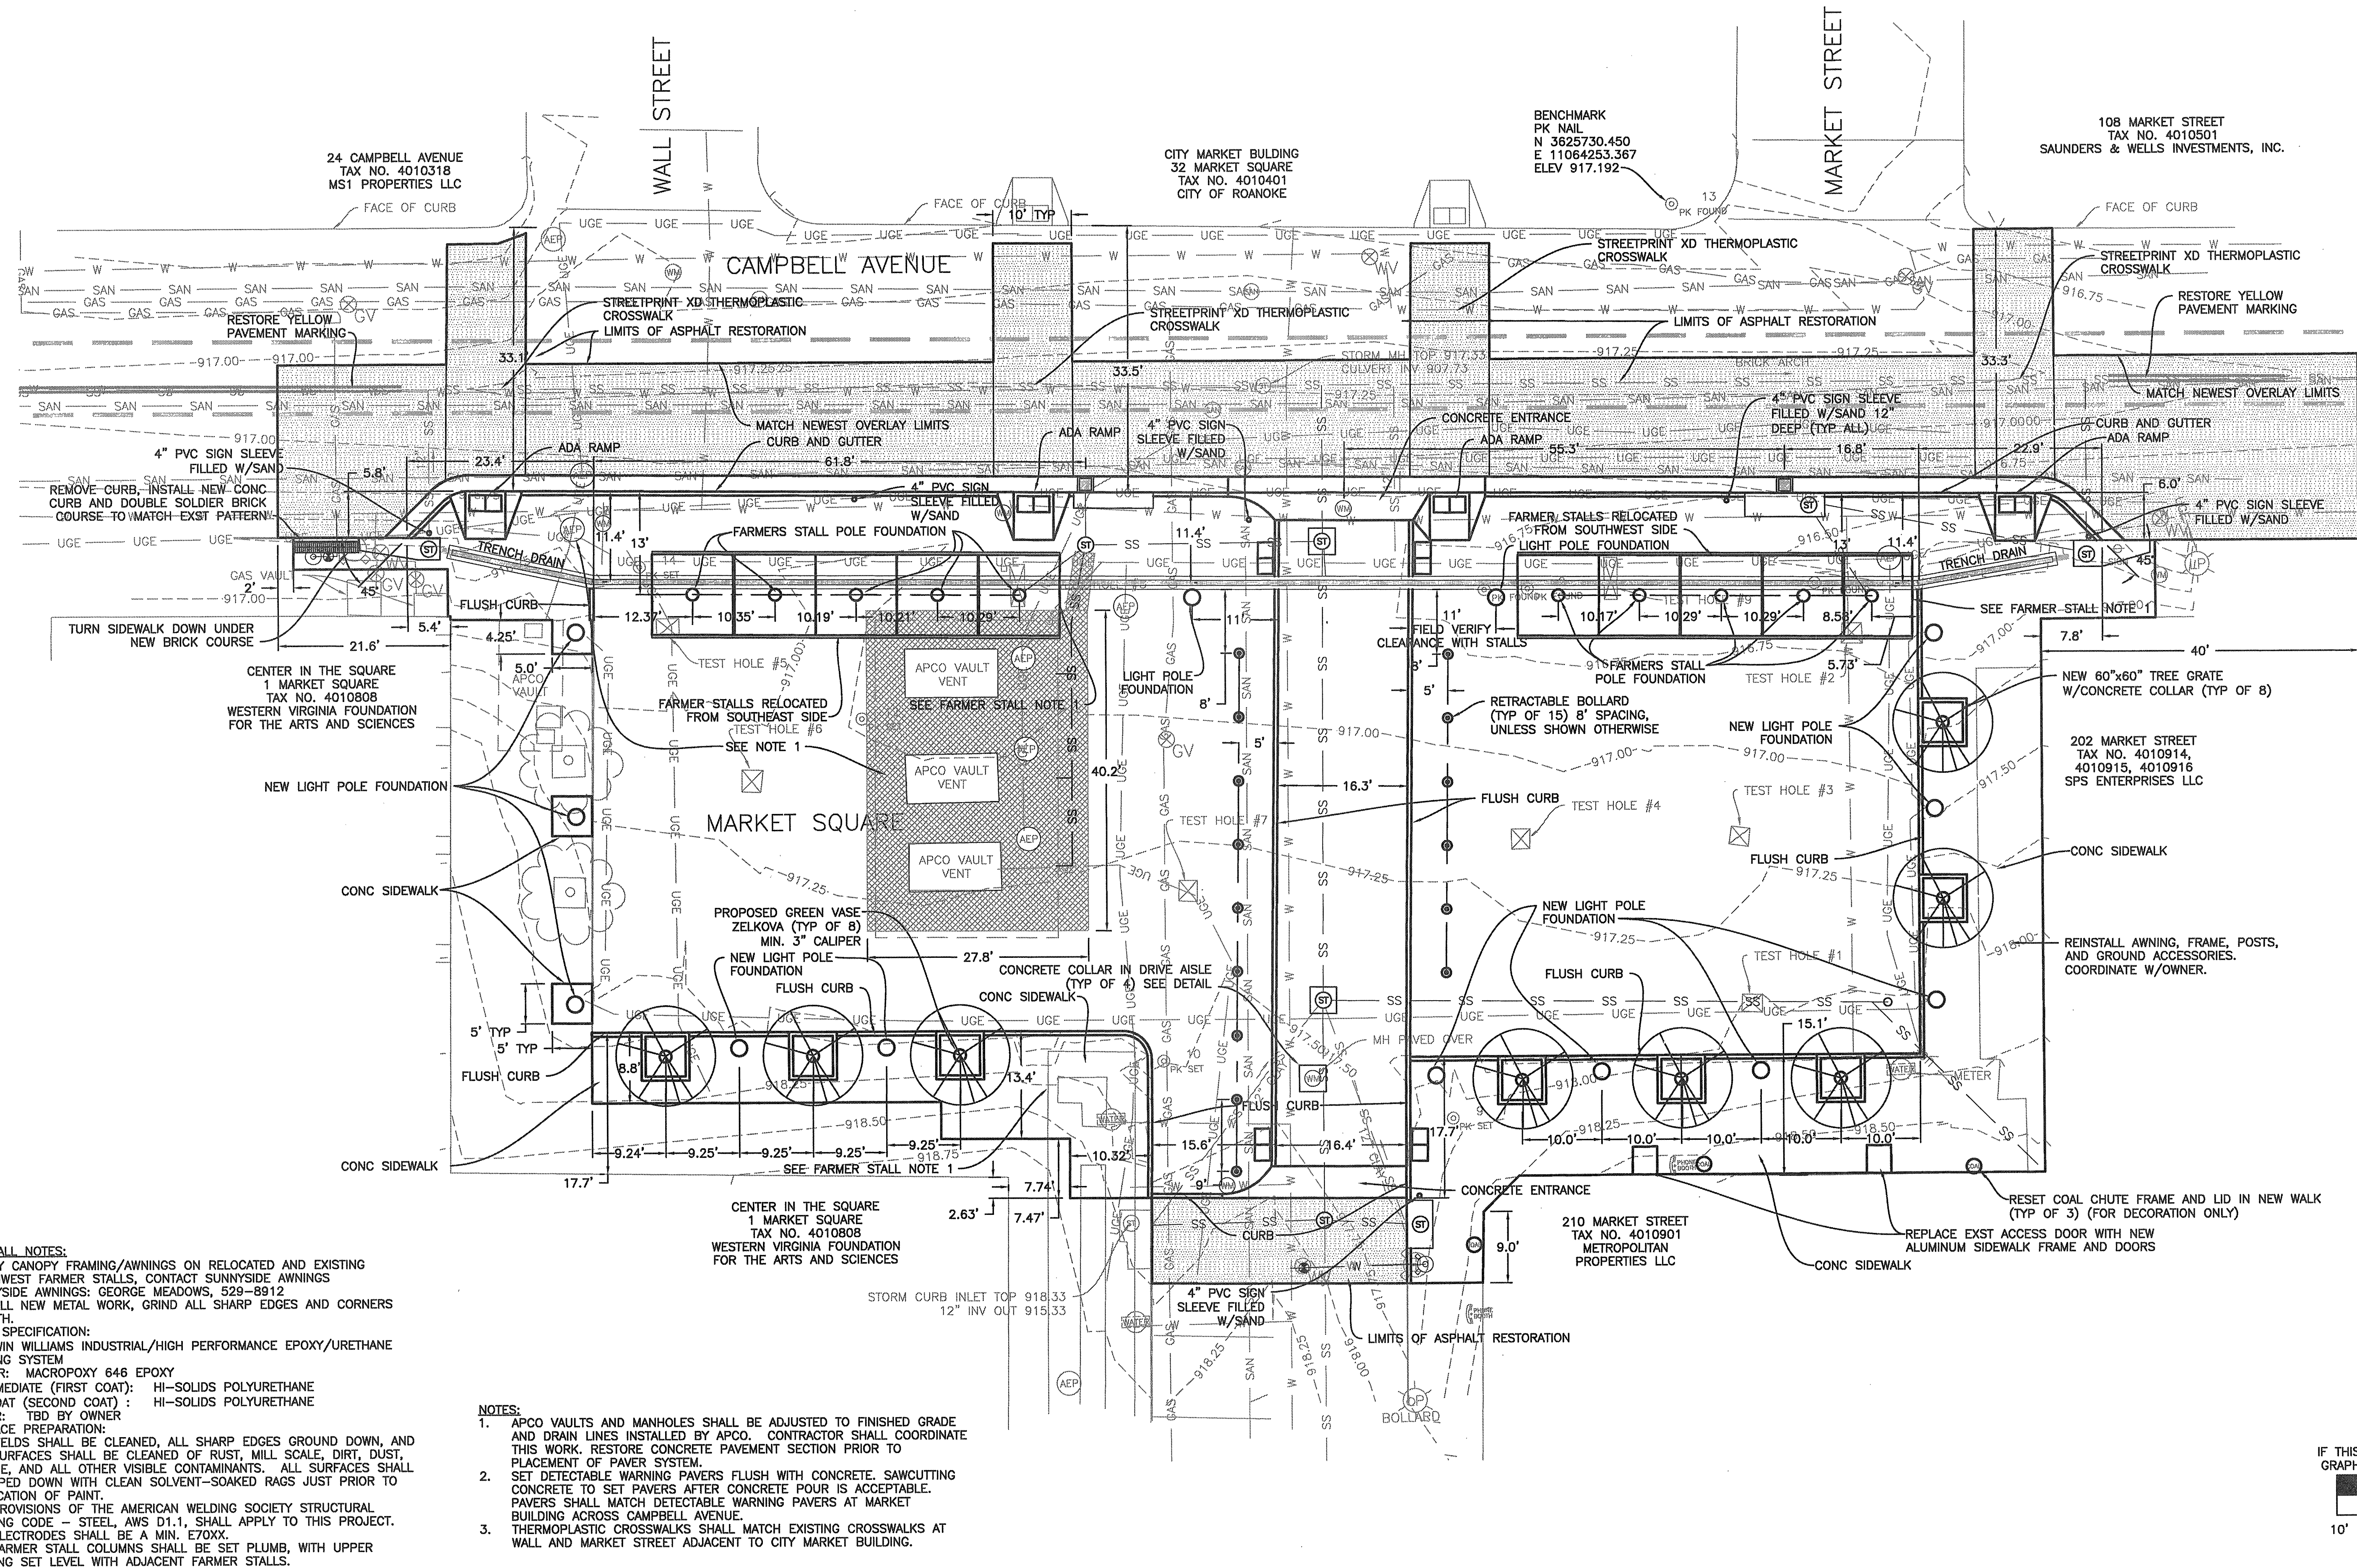

FARMER STALL NOTES:

1. MODIFY CANOPY FRAMING/AWNINGS ON RELOCATED AND EXISTING SOUTHWEST FARMER STALLS, CONTACT SUNNYSIDE AWNINGS SUNNYSIDE AWNINGS: GEORGE MEADOWS, 529-8912
2. FOR ALL NEW METAL WORK, GRIND ALL SHARP EDGES AND CORNERS SMOOTH.
3. PAINT SPECIFICATION:
SHERWIN WILLIAMS INDUSTRIAL/HIGH PERFORMANCE EPOXY/URETHANE COATING SYSTEM
PRIMER: MACROPOXY 646 EPOXY
INTERMEDIATE (FIRST COAT): HI-SOLIDS POLYURETHANE
TOPCOAT (SECOND COAT): HI-SOLIDS POLYURETHANE
COLOR: TBD BY OWNER
SURFACE PREPARATION:
ALL WELDS SHALL BE CLEANED, ALL SHARP EDGES GROUND DOWN, AND ALL SURFACES SHALL BE CLEANED OF RUST, MILL SCALE, DIRT, DUST, GREASE, AND ALL OTHER VISIBLE CONTAMINANTS. ALL SURFACES SHALL BE WIPED DOWN WITH CLEAN SOLVENT-SOAKED RAGS JUST PRIOR TO APPLICATION OF PAINT.
4. ALL PROVISIONS OF THE AMERICAN WELDING SOCIETY STRUCTURAL WELDING CODE - STEEL, AWS D1.1, SHALL APPLY TO THIS PROJECT. ALL ELECTRODES SHALL BE A MIN. E70XX.
5. ALL FARMER STALL COLUMNS SHALL BE SET PLUMB, WITH UPPER FRAMING SET LEVEL WITH ADJACENT FARMER STALLS.

NOTES:

1. APCO VAULTS AND MANHOLES SHALL BE ADJUSTED TO FINISHED GRADE AND DRAIN LINES INSTALLED BY APCO. CONTRACTOR SHALL COORDINATE THIS WORK. RESTORE CONCRETE PAVEMENT SECTION PRIOR TO PLACEMENT OF PAVER SYSTEM.
2. SET DETECTABLE WARNING PAVERS FLUSH WITH CONCRETE. SAWCUTTING CONCRETE TO SET PAVERS AFTER CONCRETE POUR IS ACCEPTABLE. PAVERS SHALL MATCH DETECTABLE WARNING PAVERS AT MARKET BUILDING ACROSS CAMPBELL AVENUE.
3. THERMOPLASTIC CROSSWALKS SHALL MATCH EXISTING CROSSWALKS AT WALL AND MARKET STREET ADJACENT TO CITY MARKET BUILDING.

IF THIS DRAWING IS A REDUCTION
GRAPHIC SCALE MUST BE USED

SCALE 1" = 10'

OFFICE OF THE CITY ENGINEER 215 CHURCH AVENUE, S.W. ROOM 350 PHONE: (540) 853-2731 FAX: (540) 853-1364 WWW.ROANOKEVA.GOV	DESIGNED: PMC	SEALS:	REV.	DATE:	DESCRIPTION	DATE: 8/30/2013	MARKET SQUARE IMPROVEMENTS CITY OF ROANOKE, VIRGINIA	SITE LAYOUT PLAN	SHEET 4 OF 18
	DRAWN: ARG					SCALE: 1"=10' 24"x36" SHEET			SHEET NO. 4
	CHECKED: PCS								