


J:\06055\Civil\06055.dwg, 06055 Chas.dwg, Plotted: Aug 28, 2007 - 8:42am

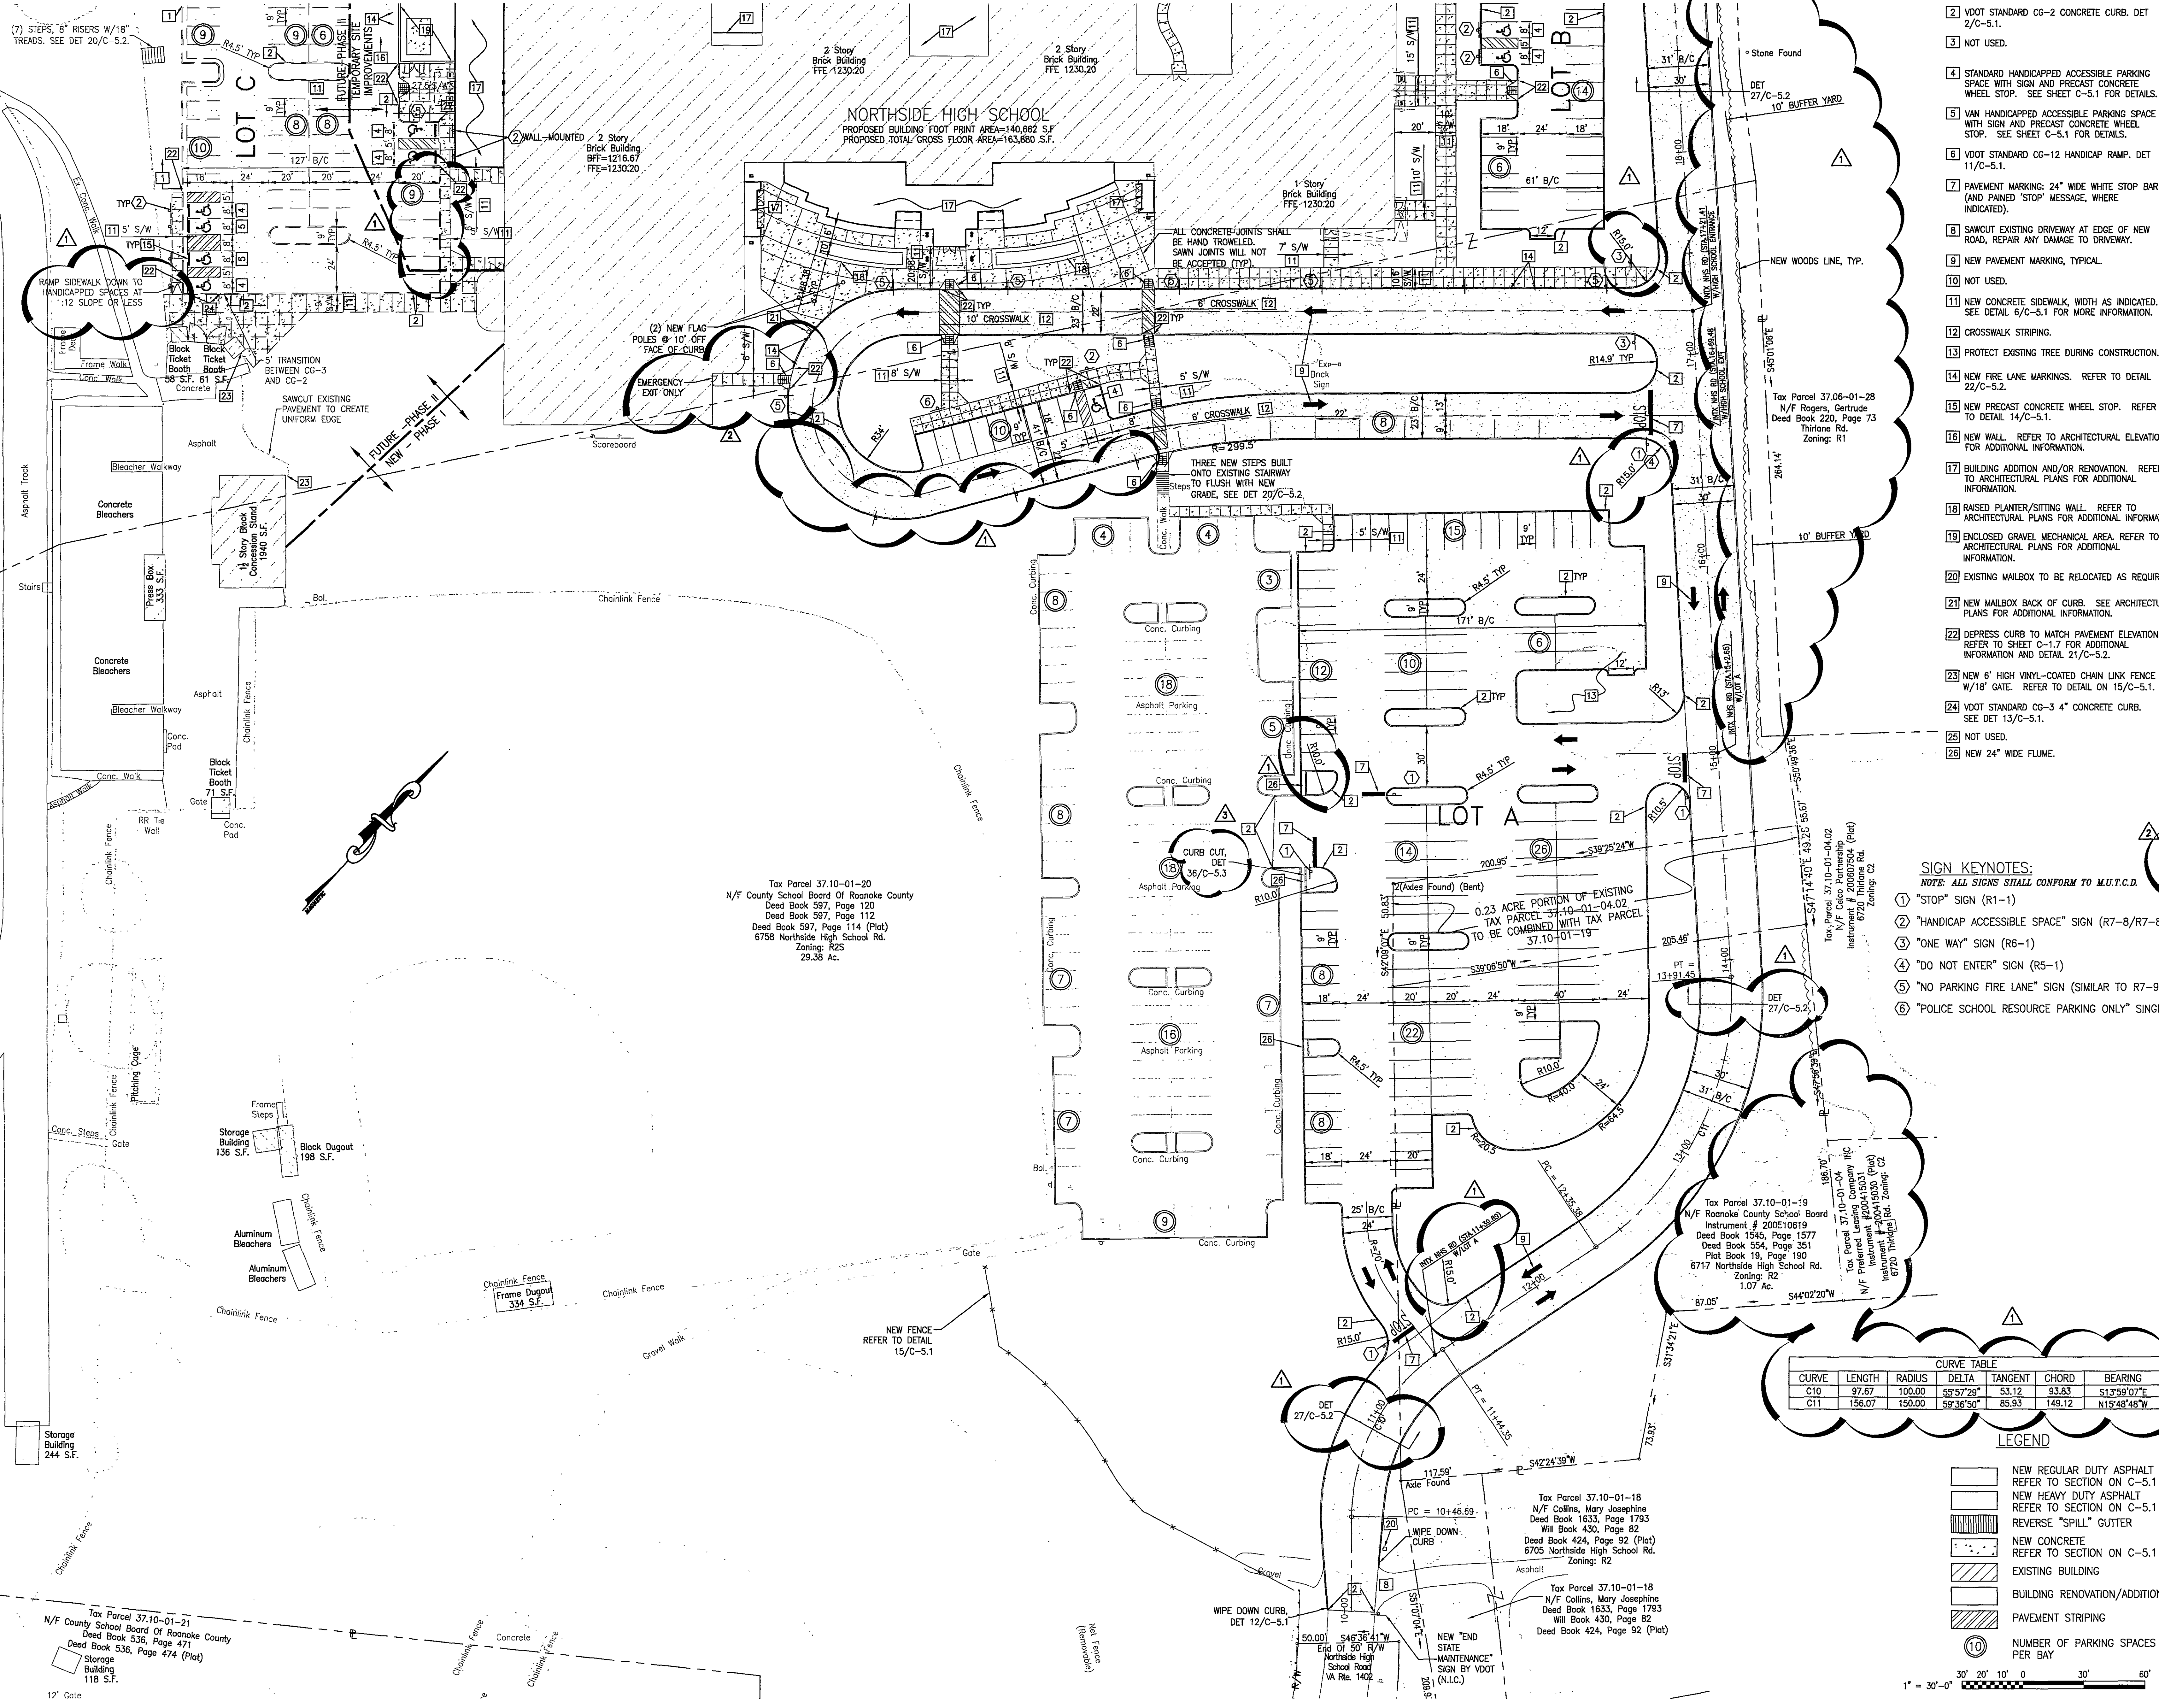


- KEYNOTES:**
- MODIFIED VDOT CG-6 CONCRETE CURB AND 18" GUTTER. DET 2/C-5.1. (FUTURE WORK ONLY)
 - VDOT STANDARD CG-2 CONCRETE CURB. DET 2/C-5.1.
 - NOT USED.
 - STANDARD HANDICAPPED ACCESSIBLE PARKING SPACE WITH SIGN AND PRECAST CONCRETE WHEEL STOP. SEE SHEET C-5.1 FOR DETAILS.
 - VAN HANDICAPPED ACCESSIBLE PARKING SPACE WITH SIGN AND PRECAST CONCRETE WHEEL STOP. SEE SHEET C-5.1 FOR DETAILS.
 - VDOT STANDARD CG-12 HANDICAP RAMP. DET 11/C-5.1.
 - PAVEMENT MARKING: 24" WIDE WHITE STOP BAR (AND PAINTED "STOP" MESSAGE, WHERE INDICATED).
 - SAW CUT EXISTING DRIVEWAY AT EDGE OF NEW ROAD, REPAIR ANY DAMAGE TO DRIVEWAY.
 - NEW PAVEMENT MARKING, TYPICAL.
 - NOT USED.
 - NEW CONCRETE SIDEWALK, WITH AS INDICATED. SEE DETAIL 6/C-5.1 FOR MORE INFORMATION.
 - CROSSWALK STRIPING.
 - PROTECT EXISTING TREE DURING CONSTRUCTION.
 - NEW FIRE LANE MARKINGS. REFER TO DETAIL 22/C-5.2.
 - NEW PRECAST CONCRETE WHEEL STOP. REFER TO DETAIL 14/C-5.1.
 - NEW WALL. REFER TO ARCHITECTURAL ELEVATIONS FOR ADDITIONAL INFORMATION.
 - BUILDING ADDITION AND/OR RENOVATION. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
 - RAISED PLANTER/SITTING WALL. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
 - ENCLOSED GRAVEL MECHANICAL AREA. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
 - EXISTING MAILBOX TO BE RELOCATED AS REQUIRED.
 - NEW MAILBOX BACK OF CURB. SEE ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
 - DEPRESS CURB TO MATCH PAVEMENT ELEVATION. REFER TO SHEET C-1.7 FOR ADDITIONAL INFORMATION AND DETAIL 21/C-5.2.
 - NEW 6" HIGH VINYL-COATED CHAIN LINK FENCE W/18" GATE. REFER TO DETAIL ON 15/C-5.1.
 - VDOT STANDARD CG-3 4" CONCRETE CURB. SEE DET 13/C-5.1.
 - NOT USED.
 - NEW 24" WIDE FLUME.

- SIGN KEYNOTES:**
NOTE: ALL SIGNS SHALL CONFORM TO M.U.T.C.D.
- "STOP" SIGN (R1-1)
 - "HANDICAP ACCESSIBLE SPACE" SIGN (R7-8/R7-8a)
 - "ONE WAY" SIGN (R6-1)
 - "DO NOT ENTER" SIGN (R5-1)
 - "NO PARKING FIRE LANE" SIGN (SIMILAR TO R7-9)
 - "POLICE SCHOOL RESOURCE PARKING ONLY" SIGN

CURVE TABLE					
CURVE	LENGTH	RADIUS	DELTA	TANGENT	CHORD
C10	97.67	100.00	55°57'29"	53.12	93.83
C11	156.07	150.00	59°36'50"	85.93	149.12

- LEGEND**
- NEW REGULAR DUTY ASPHALT REFER TO SECTION ON C-5.1
 - NEW HEAVY DUTY ASPHALT REFER TO SECTION ON C-5.1
 - REVERSE "SPILL" GUTTER
 - NEW CONCRETE REFER TO SECTION ON C-5.1
 - EXISTING BUILDING
 - BUILDING RENOVATION/ADDITION
 - PAVEMENT STRIPING
 - NUMBER OF PARKING SPACES PER BAY

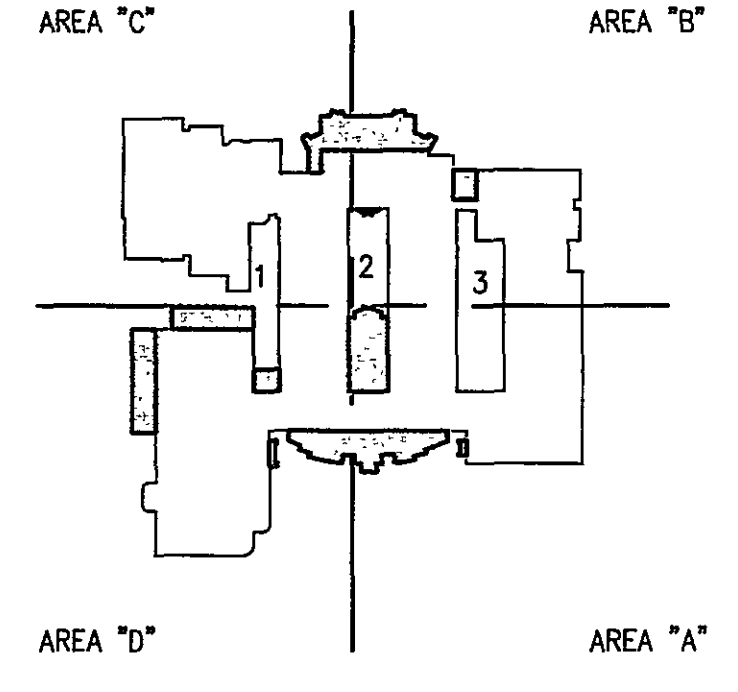

- GENERAL NOTES**
- EXISTING TOPOGRAPHIC AND PLANIMETRIC INFORMATION IS TAKEN FROM FIELD SURVEYS PERFORMED BY ANDERSON & ASSOCIATES, SEPTEMBER 2006.
 - THE CONTRACTOR SHALL CONTACT "MISS UTILITY" (1-800-552-7001) 48 HOURS PRIOR TO WORKING IN THE VICINITY OF THE EXISTING UTILITIES.
 - UNLESS OTHERWISE NOTED ALL LINEAR DIMENSIONS ARE TO THE FACE OF CURB.
 - UNLESS OTHERWISE NOTED ALL CURB RADI = 3'-0". ALL CURB RADI DIMENSIONS ARE TO THE FACE OF THE CURB.
 - REFER TO ARCHITECTURAL DRAWINGS FOR BUILDING LAYOUT AND DIMENSIONS
 - ALL CONCRETE CURB (AND GUTTER) SHALL BE CONSTRUCTED IN ACCORDANCE WITH VDOT STANDARD CG-2 (OR CG-6).
 - ALL SITE LAYOUT SHALL BE PERFORMED BY A LICENSED SURVEYOR UTILIZING AN ELECTRONIC COPY OF THE PLANS. DIMENSIONS PROVIDED ARE FOR GENERAL LOCATION PURPOSES ONLY.
 - ALL CONCRETE JOINTS SHALL BE HAND TROWLED. SAWN JOINTS WILL NOT BE ACCEPTED (TYP).
 - WIPE DOWN ENDS OF CG-2 AND CG-6 CURBS PER DETAIL 12 ON SHEET C-5.1.
 - ALL SIGNS, EXISTING OR PROPOSED, SHALL COMPLY WITH REQUIREMENTS STATED IN SECTION 30-93 OF THE ROANOKE COUNTY ZONING ORDINANCE.

REVISION #2 CHANGES
PARKING LOTS C & B AND ASSOCIATED AREAS ARE NOW SHOWN ON THIS PLAN AS FUTURE WORK (PHASE II). PHASE II WILL BE CONSTRUCTED AT A LATER DATE. REFER TO SHEET C-3.2 FOR TEMPORARY IMPROVEMENTS BETWEEN NEW & FUTURE WORK.

SPECTRUM DESIGN
10 CHURCH AVE SE, PLAZA SUITE 11 ROANOKE, VIRGINIA 24011 540.342.9001
ROANOKE • MARION

ADDITIONS AND RENOVATIONS TO NORTHSIDE HIGH SCHOOL ROANOKE COUNTY PUBLIC SCHOOLS VA DOE #80-52G

SPECTRUM DESIGN PROJECT NO. 06055



DATE: 15 APRIL, 2007

DESIGN ARCHITECT	MAR	027
PROJECT ARCHITECT		
CHECKED BY		
DRAWN BY		
REVISIONS	NUMBER	DATE
CO. REV. VE REVISION	1	5/25/07
COUNTY REVIEW	2	8/07/07
	3	8/28/07

SHEET TITLE DIMENSIONAL PLAN - AREA 'SOUTH'

C-1.3