


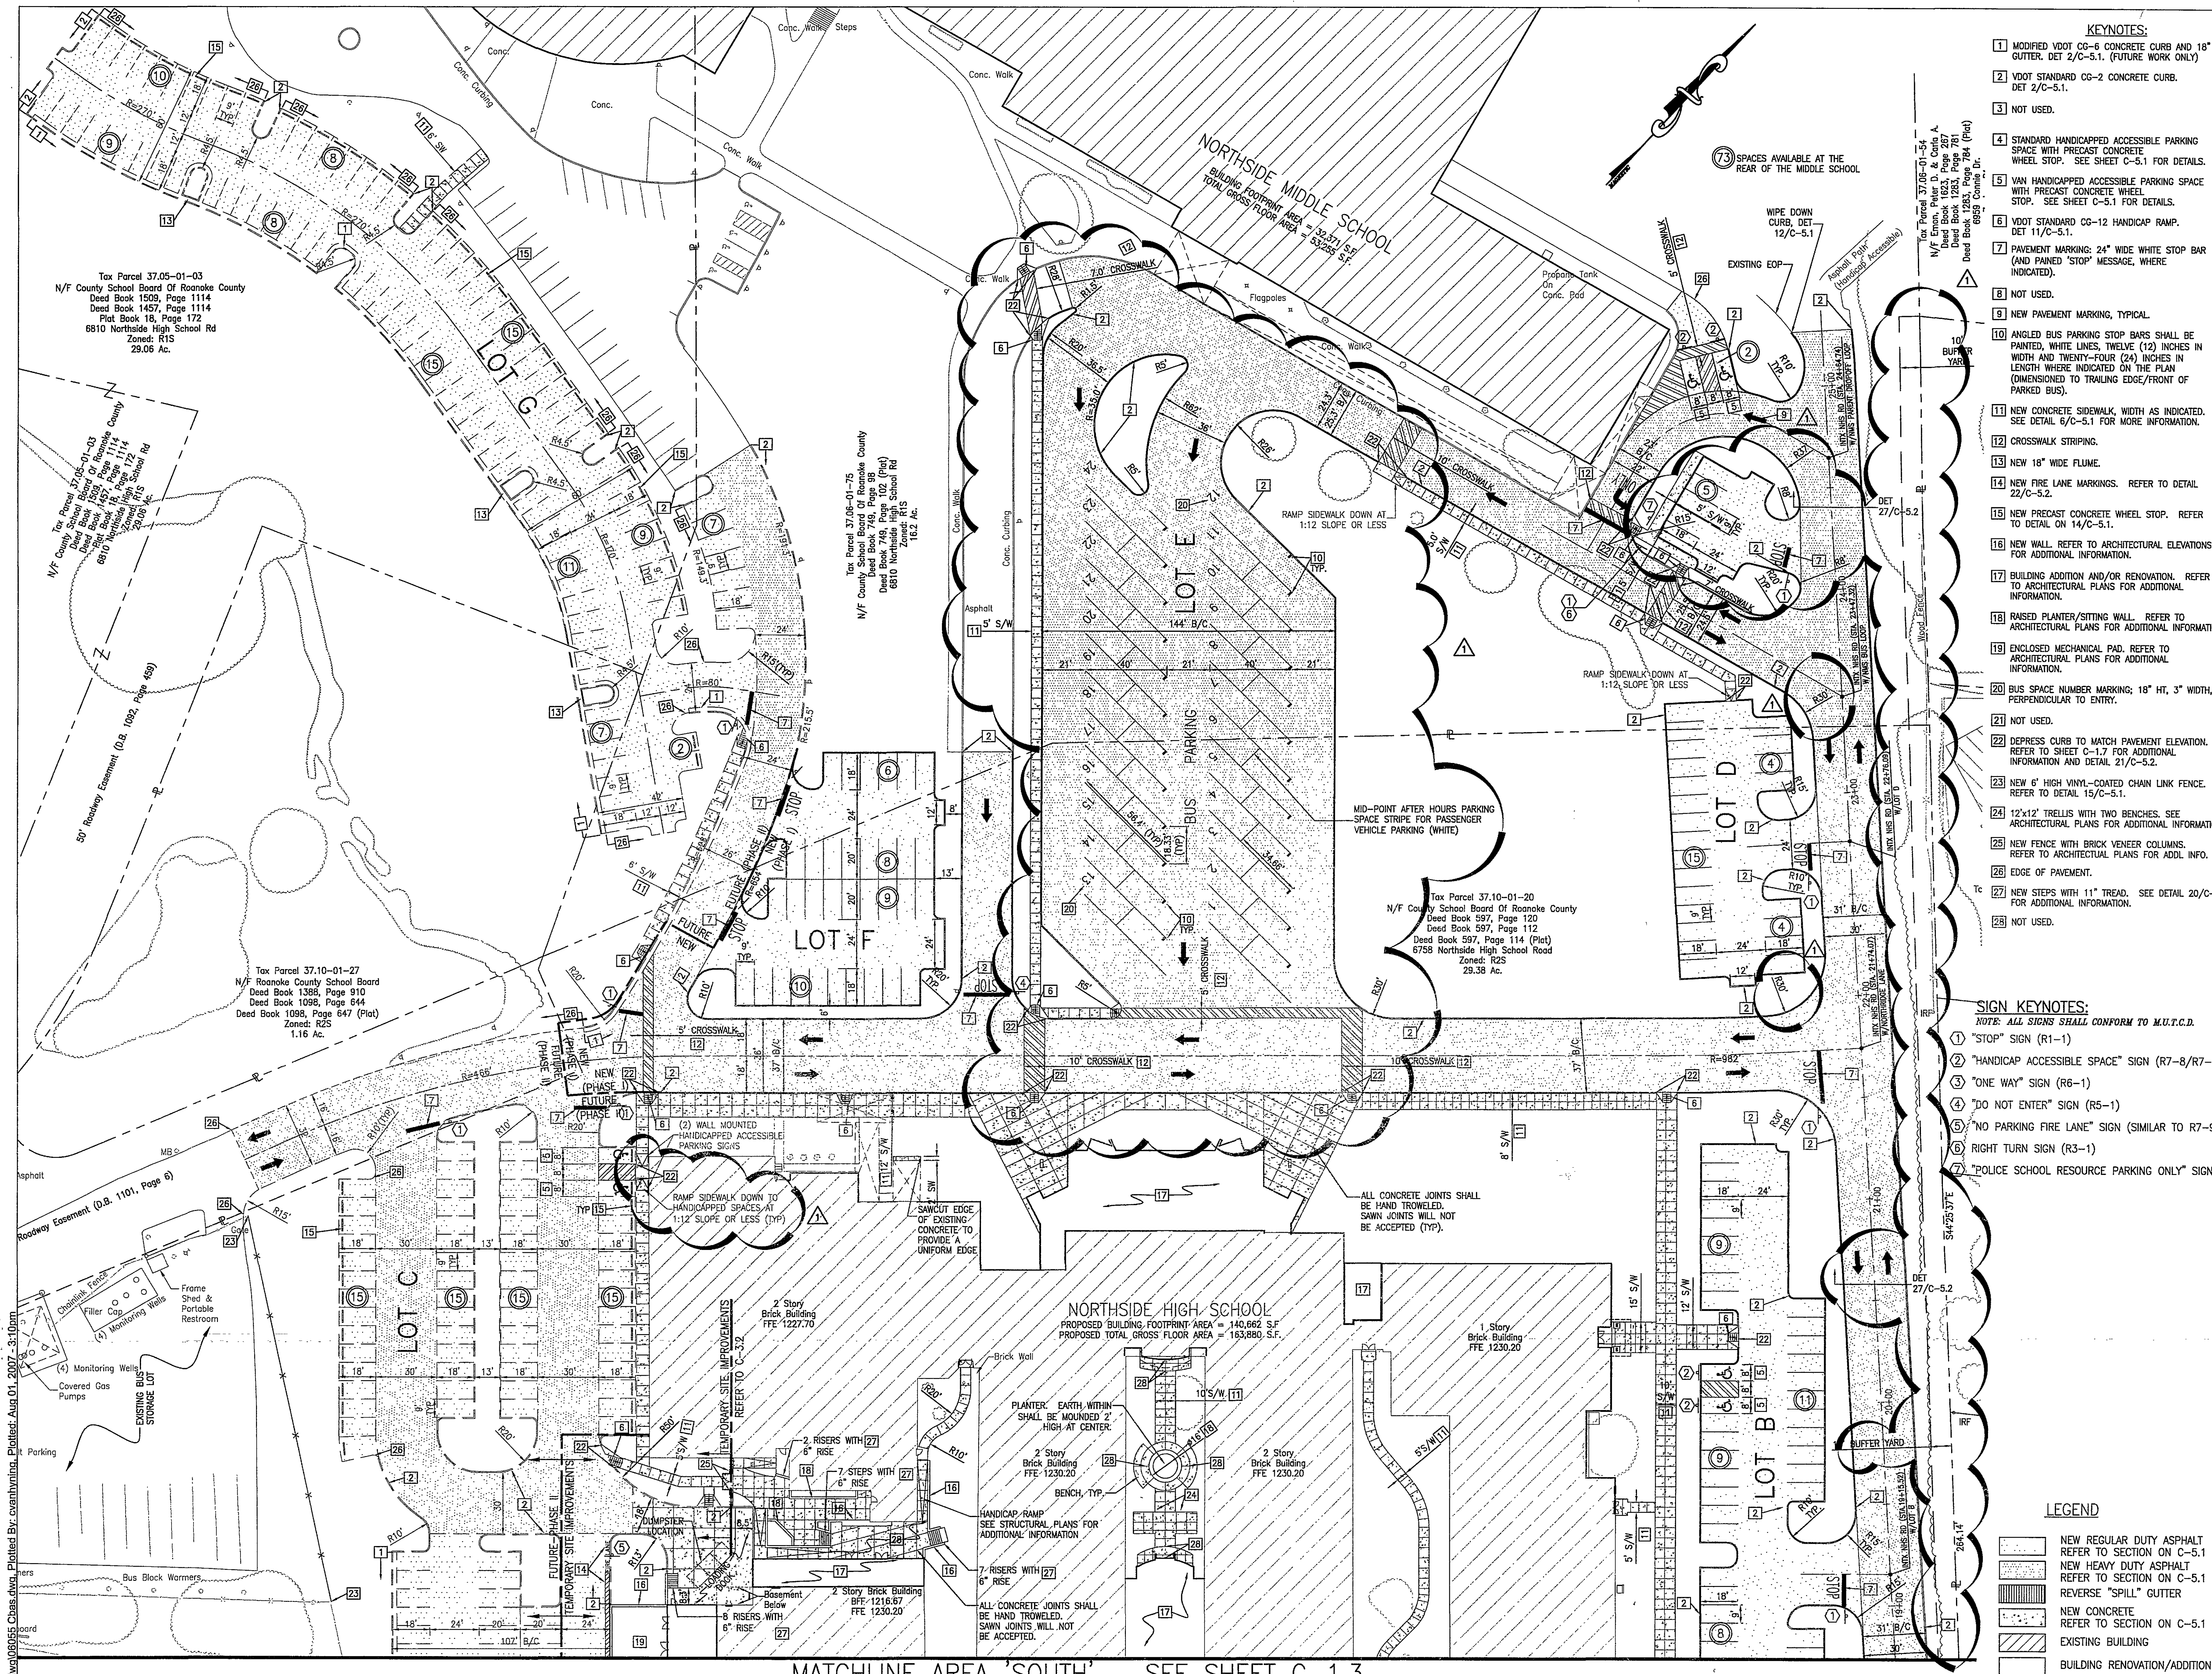

KEYNOTES:

- MODIFIED VDOT CG-6 CONCRETE CURB AND 18" GUTTER. DET 2/C-5.1. (FUTURE WORK ONLY)
- VDOT STANDARD CG-2 CONCRETE CURB. DET 2/C-5.1.
- NOT USED.
- STANDARD HANDICAPPED ACCESSIBLE PARKING SPACE WITH PRECAST CONCRETE WHEEL STOP. SEE SHEET C-5.1 FOR DETAILS.
- VAN HANDICAPPED ACCESSIBLE PARKING SPACE WITH PRECAST CONCRETE WHEEL STOP. SEE SHEET C-5.1 FOR DETAILS.
- VDOT STANDARD CG-12 HANDICAP RAMP. DET 11/C-5.1.
- PAVEMENT MARKING: 24" WIDE WHITE STOP BAR (AND PAINTED "STOP" MESSAGE, WHERE INDICATED).
- NOT USED.
- NEW PAVEMENT MARKING, TYPICAL.
- ANGLED BUS PARKING STOP BARS SHALL BE PAINTED, WHITE LINES, TWELVE (12) INCHES IN WIDTH AND TWENTY-FOUR (24) INCHES IN LENGTH WHERE INDICATED ON THE PLAN (DIMENSIONED TO TRAILING EDGE/FRONT OF PARKED BUS).
- NEW CONCRETE SIDEWALK, WIDTH AS INDICATED. SEE DETAIL 6/C-5.1 FOR MORE INFORMATION.
- CROSSWALK STRIPING.
- NEW 18" WIDE FLUME.
- NEW FIRE LANE MARKINGS. REFER TO DETAIL 22/C-5.2.
- NEW PRECAST CONCRETE WHEEL STOP. REFER TO DETAIL ON 14/C-5.1.
- NEW WALL. REFER TO ARCHITECTURAL ELEVATIONS FOR ADDITIONAL INFORMATION.
- BUILDING ADDITION AND/OR RENOVATION. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
- RAISED PLANTER/SITTING WALL. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
- ENCLOSED MECHANICAL PAD. REFER TO ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
- BUS SPACE NUMBER MARKING: 18" HT, 3" WIDTH, PERPENDICULAR TO ENTRY.
- NOT USED.
- DEPRESS CURB TO MATCH PAVEMENT ELEVATION. REFER TO SHEET C-1.7 FOR ADDITIONAL INFORMATION AND DETAIL 21/C-5.2.
- NEW 6" HIGH VINYL-COATED CHAIN LINK FENCE. REFER TO DETAIL 15/C-5.1.
- 12"x12" TRELLIS WITH TWO BENCHES. SEE ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION.
- NEW FENCE WITH BRICK VENEER COLUMNS. REFER TO ARCHITECTURAL PLANS FOR ADDL INFO.
- EDGE OF PAVEMENT.
- NEW STEPS WITH 11" TREAD. SEE DETAIL 20/C-5.2 FOR ADDITIONAL INFORMATION.
- NOT USED.

SIGN KEYNOTES:
NOTE: ALL SIGNS SHALL CONFORM TO M.U.T.C.D.

- "STOP" SIGN (R1-1)
- "HANDICAP ACCESSIBLE SPACE" SIGN (R7-8/R7-8a)
- "ONE WAY" SIGN (R6-1)
- "DO NOT ENTER" SIGN (R5-1)
- "NO PARKING FIRE LANE" SIGN (SIMILAR TO R7-9)
- RIGHT TURN SIGN (R3-1)
- "POLICE SCHOOL RESOURCE PARKING ONLY" SIGN

LEGEND

- NEW REGULAR DUTY ASPHALT REFER TO SECTION ON C-5.1
- NEW HEAVY DUTY ASPHALT REFER TO SECTION ON C-5.1
- REVERSE "SPILL" GUTTER
- NEW CONCRETE REFER TO SECTION ON C-5.1
- EXISTING BUILDING
- BUILDING RENOVATION/ADDITION
- PAVEMENT STRIPING
- NUMBER OF PARKING SPACES PER BAY

GENERAL NOTES

- EXISTING TOPOGRAPHIC AND PLANIMETRIC INFORMATION IS TAKEN FROM FIELD SURVEYS PERFORMED BY ANDERSON & ASSOCIATES, SEPTEMBER 2006.
- THE CONTRACTOR SHALL CONTACT "MISS UTILITY" (1-800-552-7001) 48 HOURS PRIOR TO WORKING IN THE VICINITY OF THE EXISTING UTILITIES.
- UNLESS OTHERWISE NOTED ALL LINEAR DIMENSIONS ARE TO THE FACE OF CURB.
- UNLESS OTHERWISE NOTED ALL CURB RADI = 3'-0".
- REFER TO ARCHITECTURAL DRAWINGS FOR BUILDING LAYOUT AND DIMENSIONS.
- ALL CONCRETE CURB (AND GUTTER) SHALL BE CONSTRUCTED IN ACCORDANCE WITH VDOT STANDARD CG-2 (OR CG-6).
- ALL SITE LAYOUT SHALL BE PERFORMED BY A LICENSED SURVEYOR UTILIZING AN ELECTRONIC COPY OF THE PLANS. DIMENSIONS PROVIDED ARE FOR GENERAL LOCATION PURPOSES ONLY.
- ALL CONCRETE JOINTS SHALL BE HAND TROWLED, SAWN JOINTS WILL NOT BE ACCEPTED (TYP).
- WIPE DOWN ENDS OF CG-2 AND CG-6 CURBS PER DETAIL 12 ON SHEET C-5.1.
- ALL SIGNS, EXISTING OR PROPOSED, SHALL COMPLY WITH REQUIREMENTS STATED IN SECTION 30-93 OF THE ROANOKE COUNTY ZONING ORDINANCE.

REVISION #2 CHANGES:
PARKING LOTS C & G AND ASSOCIATED AREAS ARE NOW SHOWN ON THIS PLAN AS FUTURE WORK (PHASE II). PHASE I WILL BE CONSTRUCTED AT A LATER DATE USING THESE PLANS. REFER TO SHEET C-3.2 FOR TEMPORARY IMPROVEMENTS BETWEEN NEW & FUTURE WORK.

ALL GUTTER HAS BEEN REMOVED FROM THIS PROJECT AND SELECTED SIDEWALKS HAVE BEEN NARROWED TO 5' WIDE (PHASE I).

APPROVED

SPECTRUM DESIGN

10 CHURCH AVE SE, PLAZA SUITE 1 ROANOKE, VIRGINIA 24011 540.342.6001
ROANOKE • MARION

ADDITIONS AND RENOVATIONS TO

NORTHSIDE HIGH SCHOOL

ROANOKE COUNTY PUBLIC SCHOOLS
VA DOE #80-52G

SPECTRUM DESIGN PROJECT NO. 06055

COMMONWEALTH OF VIRGINIA
MICHAEL A. RAVES
028599
8/9/07


DATE: 15 APRIL, 2007
DESIGN ARCHITECT: MAR
PROJECT ENGINEER: MAR
CHECKED BY: MAR
REVISIONS: 1
COUNTY REVIEW: 1
CO. REV. VE REVISION: 1

DATE: 5/25/07
8/3/07

SHEET TITLE

DIMENSIONAL PLAN - AREA 'NORTH'

MATCHLINE AREA 'SOUTH' - SEE SHEET C-1.3

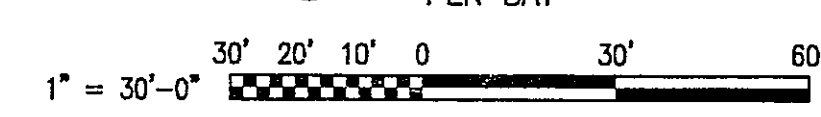

C-1.4