



LANDSCAPE MATERIALS								
SYMBOL & KEY	SCIENTIFIC NAME	COMMON NAME	SIZE	CONTAINER	COMMENT	QUANTITY	20 YEAR CANOPY	TREE CANOPY
TREES								
AR	Acer rubrum "Red Sunset"	RED SUNSET MAPLE	2" CAL.	B4B	-	3	314	942
QP	Quercus phellos	WILLOW OAK	2" CAL.	B4B	-	15	254	3,810
JV	Juniperus virginiana	EASTERN RED CEDAR	5'	B4B	-	57	38	2,166
CL	X Cupressocyparis leylandii	LEYLAND CYPRESS	5'	B4B	-	48	113	5,424
SHRUBS								
AG	Abelia x grandiflora	GLOSSY ABELIA	18"	#3	3" O.C.	77		
IG	Ilex glabra "Shamrock"	SHAMROCK INKBERY HOLLY	18"	#3	3" O.C.	45		
JV	Juniperus chinensis "GOLD COAST"	GOLD COAST JUNIPER	18"	#3	4" O.C.	150		
VP	Viburnum prunifolium	BLACK-HAW VIBURNUM	18"	#3	4" O.C.	145		
GROUND COVER								
HA	Hemerocallis x "Azttec Gold"	AZTEC GOLD DAYLILY	-	PINT	30" O.C.	42		
IH	Juniperus horizontalis "Wiltoni"	BLUE RUG JUNIPER	-	PINT	32" O.C.	48		
						TOTAL CANOPY		12,432

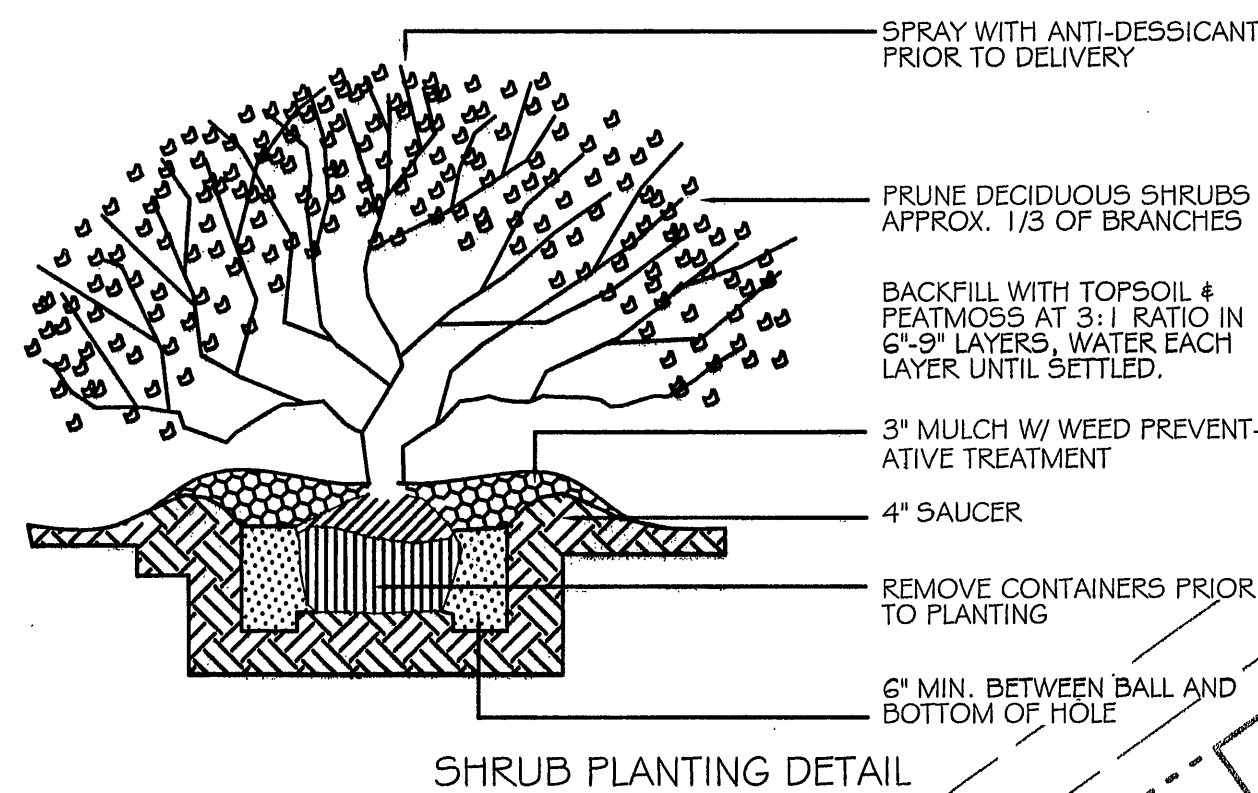


CANOPY COVERAGE:

1. SITE AREA: 35,719 SF (0.82 AC.) DISTURBED AREA
2. CANOPY COVERAGE REQUIRED (15%): 5,358 SF
3. CANOPY COVERAGE PROVIDED: 12,432 SF

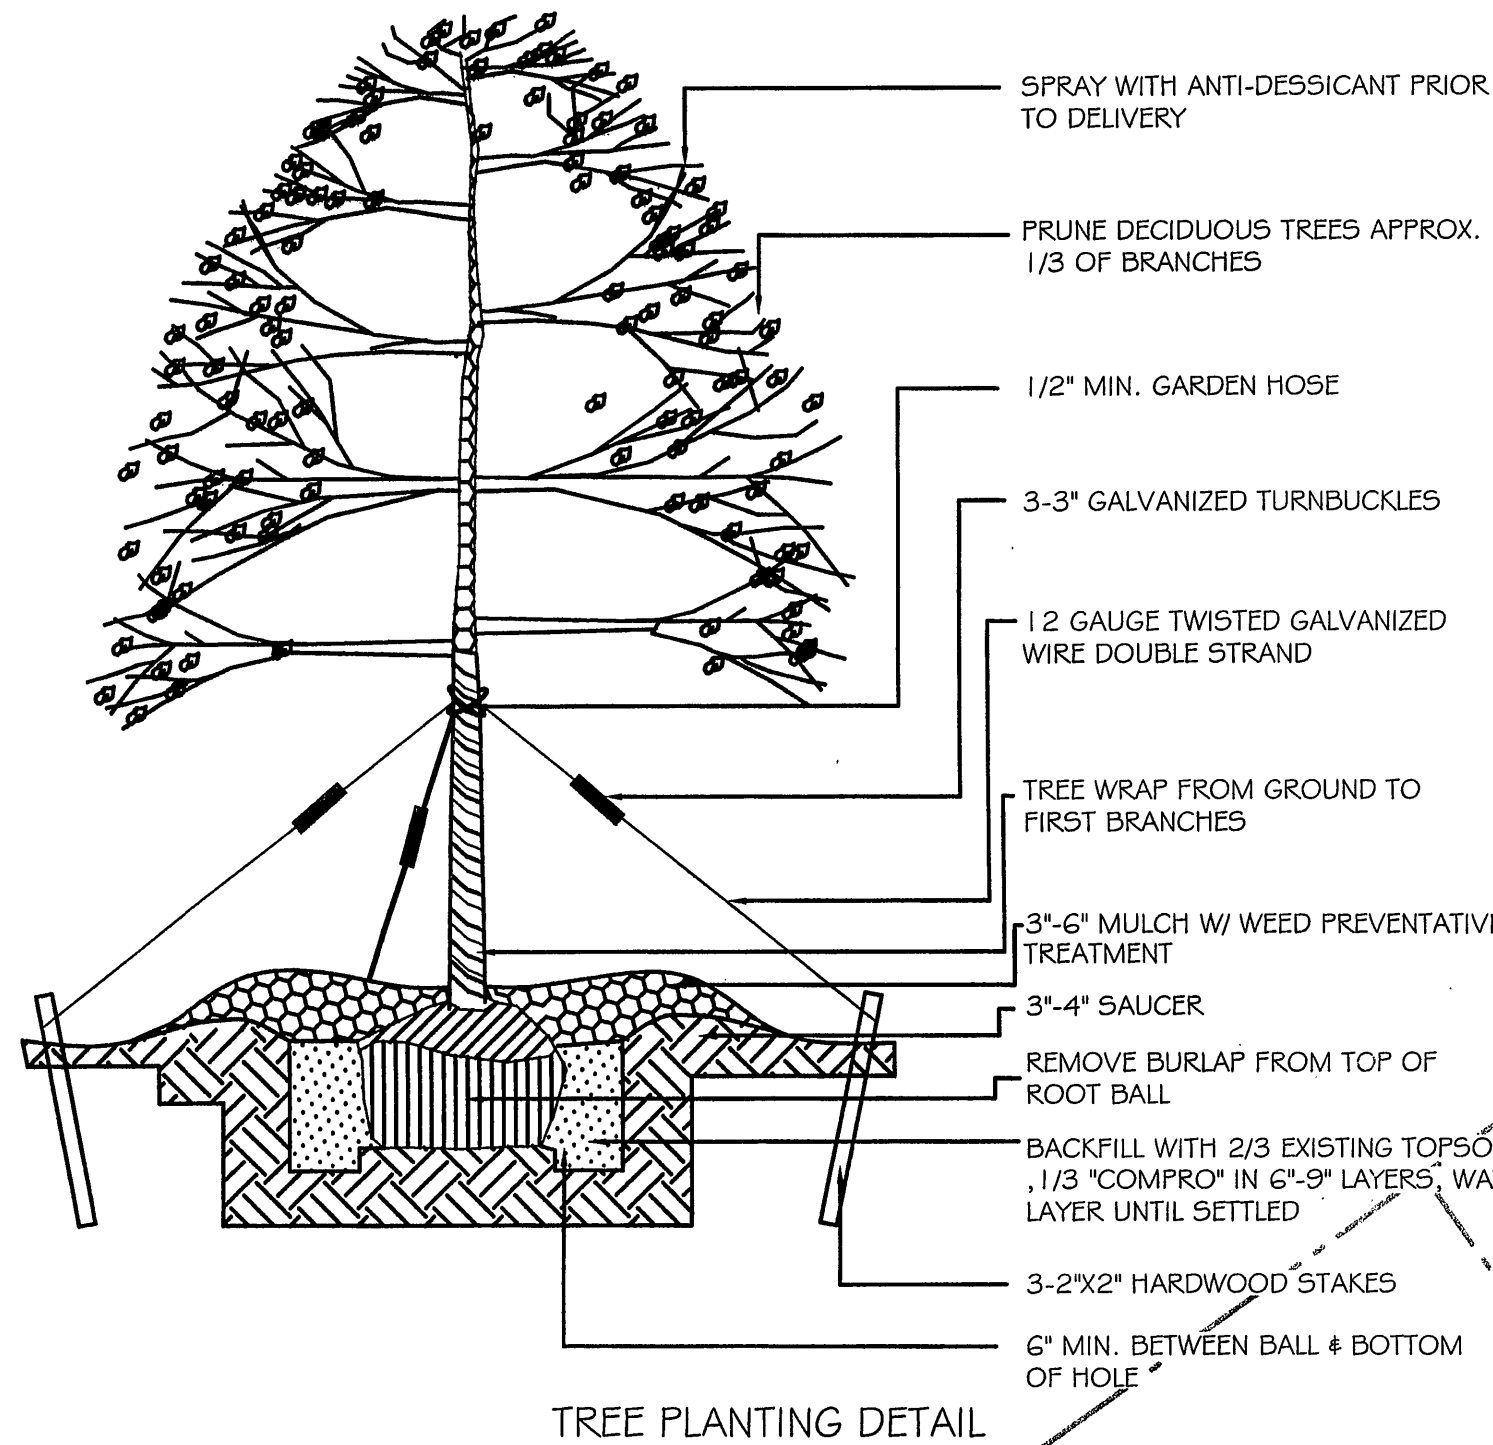

TREE PLANTING DETAIL

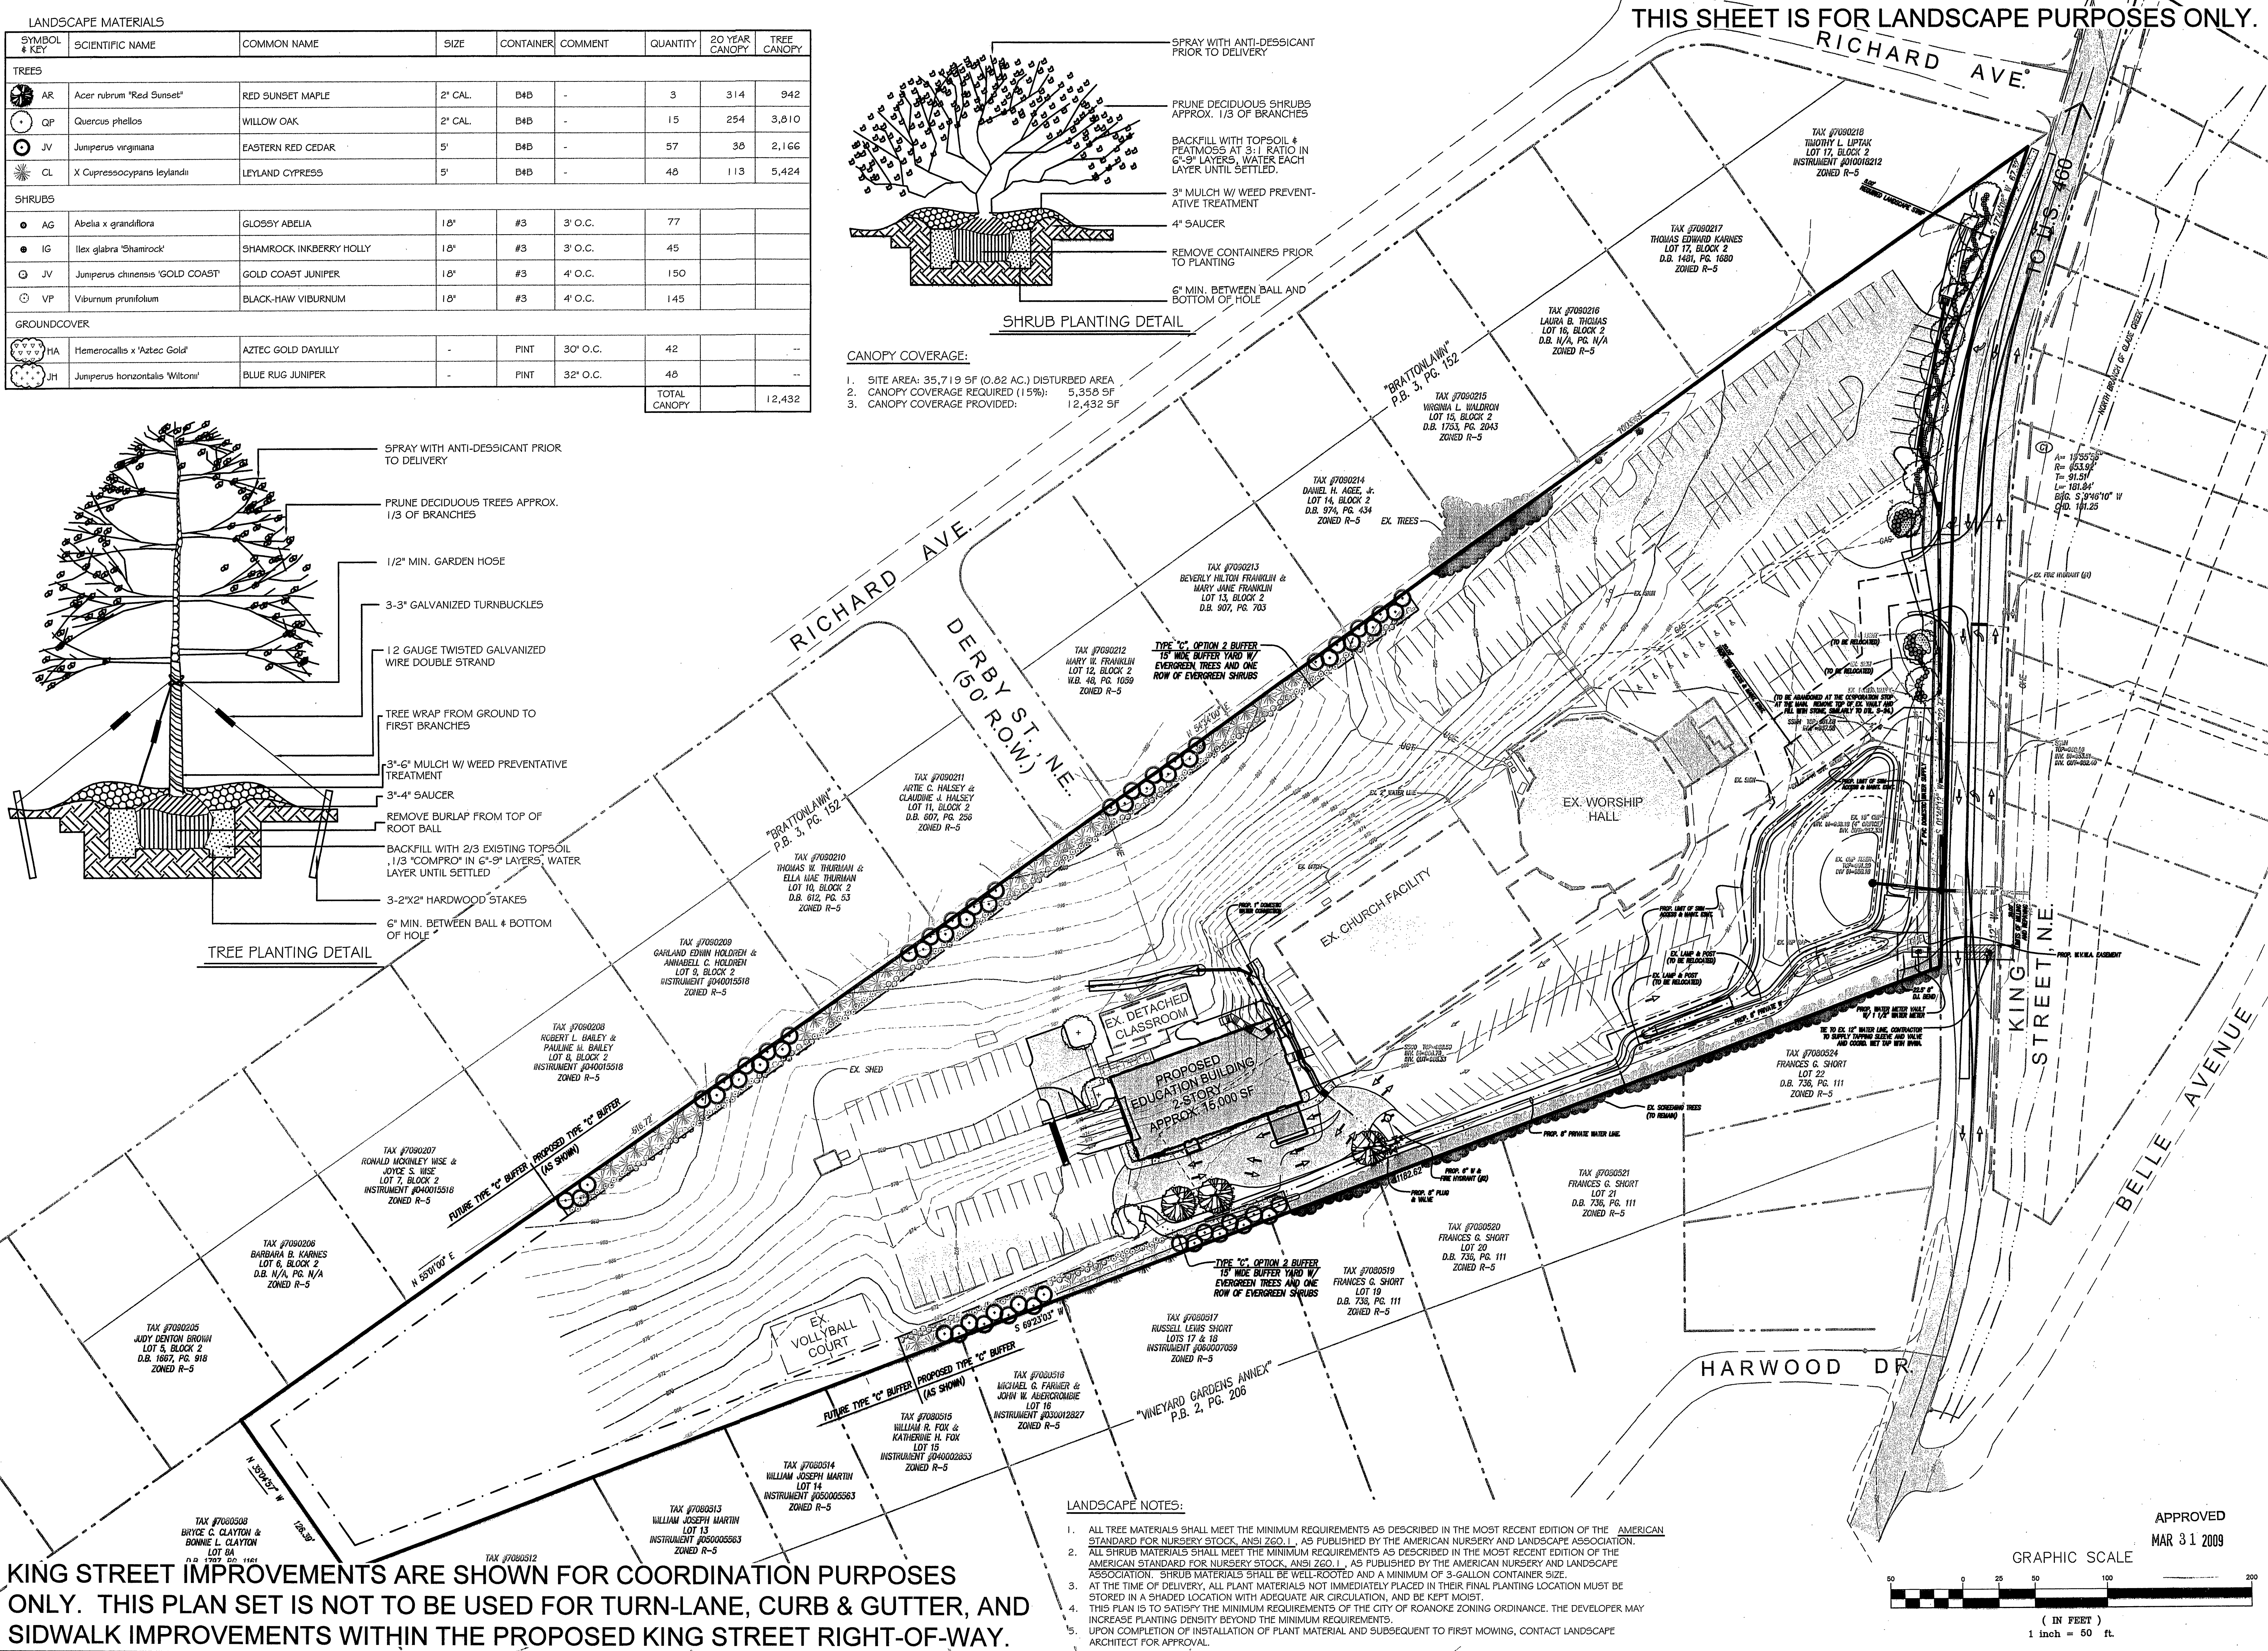


KING STREET IMPROVEMENTS ARE SHOWN FOR COORDINATION PURPOSES ONLY. THIS PLAN SET IS NOT TO BE USED FOR TURN-LANE, CURB & GUTTER, AND SIDEWALK IMPROVEMENTS WITHIN THE PROPOSED KING STREET RIGHT-OF-WAY.

LANDSCAPE NOTES:

1. ALL TREE MATERIALS SHALL MEET THE MINIMUM REQUIREMENTS AS DESCRIBED IN THE MOST RECENT EDITION OF THE "AMERICAN STANDARD FOR NURSERY STOCK, ANSI Z60.1", AS PUBLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION.
2. ALL SHRUB MATERIALS SHALL MEET THE MINIMUM REQUIREMENTS AS DESCRIBED IN THE MOST RECENT EDITION OF THE "AMERICAN STANDARD FOR NURSERY STOCK, ANSI Z60.1", AS PUBLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION. SHRUB MATERIALS SHALL BE WELL-ROOTED AND A MINIMUM OF 3-GALLON CONTAINER SIZE.
3. AT THE TIME OF DELIVERY, ALL PLANT MATERIALS NOT IMMEDIATELY PLACED IN THEIR FINAL PLANTING LOCATION MUST BE STORED IN A SHADED LOCATION WITH ADEQUATE AIR CIRCULATION, AND BE KEPT MOIST.
4. THIS PLAN IS TO SATISFY THE MINIMUM REQUIREMENTS OF THE CITY OF ROANOKE ZONING ORDINANCE. THE DEVELOPER MAY INCREASE PLANTING DENSITY BEYOND THE MINIMUM REQUIREMENTS.
5. UPON COMPLETION OF INSTALLATION OF PLANT MATERIAL AND SUBSEQUENT TO FIRST MOWING, CONTACT LANDSCAPE ARCHITECT FOR APPROVAL.

APPROVED
MAR 31 2009

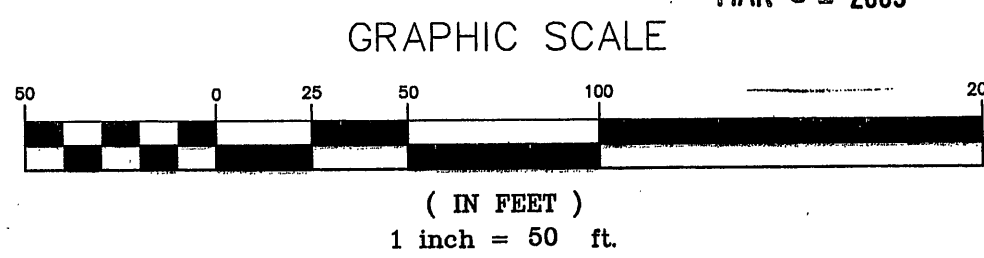

LANDSCAPE PLAN

PARKWAY ACADEMY
AT
PARKWAY HOUSE OF PRAYER
PREPARED FOR
JONES & JONES ARCHITECTS, PC
CITY OF ROANOKE, VIRGINIA

REVISIONS

NO.	DATE	DESCRIPTION
1		
2		
3		
4		
5		

DATE: March 26, 2009

SCALE: 1" = 50'

COMMISSION NO: 08-210

SHEET 11 OF 13

LUMSDEN ASSOCIATES, P.C.
ENGINEERS-SURVEYORS-PLANNERS
ROANOKE, VIRGINIA

COMMONWEALTH OF VIRGINIA
KEVIN T. BARNES
Cert. No. 000787
LANDSCAPE ARCHITECT

PHONE: (540) 774-4411
FAX: (540) 774-4445
EMAIL: MAIL@LUMSDENPC.COM

4664 BRIMBLETON AVENUE
C/O CHURCHMAN
ROANOKE, VIRGINIA 24018