

PLAN


SCALE: 1" = 20'-0"

PLANT LIST

QTY.	SYMB.	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS
TREES					
19	AG	Ametanther grandiflora 'Autumn Brilliance'	Autumn Brilliance Serviceberry	8'-10' ht.	B&B; multi-stem, well-branched
22	AR	Acer rubrum 'October Glory'	October Glory Red Maple	3" - 3 1/2" cal.	B&B; symmetrical, well-branched
24	CC	Cercis canadensis	Eastern Redbud	5'-6' ht.	Container or B&B
106	PT	Pinus taeda	Loblolly Pine	5'-6' ht.	Container or B&B
24	OP	Quercus phellos	Willow oak	3" - 3 1/2" cal.	B&B; symmetrical, well-branched
SHRUBS					
205	IC	Ilex crenata 'Bennett's Compact'	Bennett's Compact Japanese Holly	18" - 24" ht.	Container
10	ICB	Ilex x meserveae 'China Boy'	China Boy Holly	18" - 24" ht.	Container
93	ICG	Ilex x meserveae 'China Girl'	China Girl Holly	18" - 24" ht.	Container
18	IMJ	Ilex verticillata 'Jim Dandy'	Jim Dandy Winterberry	18" - 24" ht.	Container
168	IVR	Ilex verticillata 'Red Sprite'	Red Sprite Winterberry	18" - 24" ht.	Container
216	JC	Juniperus chinensis 'Sam Jones'	Sam Jones Juniper	12" - 15" spr.	3' o.c.; triangular spacing
GROUNDCOVERS, PERENNIALS & ANNUALS					
7128	PA	Pennisetum alopecuroides 'Nanah'	Dwarf Fountain Grass	1 qt.	12" O.C.; triangular spacing
			Soil		

PLANTING NOTES

- Contractor shall be responsible for making himself familiar with all underground utilities, pipes and structures. Contractor shall take sole responsibility for any cost incurred due to damage to utilities, pipes and structures.
- Do not proceed with construction as designed when it is obvious that obstructions and/or grade differences exist that may not have been known during design. Such conditions shall immediately be brought to the attention of the Architect. The Contractor
- All plant material shall be approved by the Architect prior to its arrival on site.
- Final location of all plant material shall be subject to the approval of the Architect. The Contractor shall notify the Architect for inspection of plant layout after the layout of each area and before installation.
- See details and specifications for staking methods, plant pit dimensions and planting soil requirements.
- Soil amendments and fertilizer specified are to be used for bid price basis only. Specific amendments and fertilizer application will be determined after grading operations are complete and soil test results are in.
- No planting shall be done before acceptance of grading.
- No substitutions of plant species shall be made without the prior written permission of the Architect.
- For planting details, see Sheet L-2.
- All areas disturbed by construction operation and not otherwise specified shall be seeded per the Specifications.

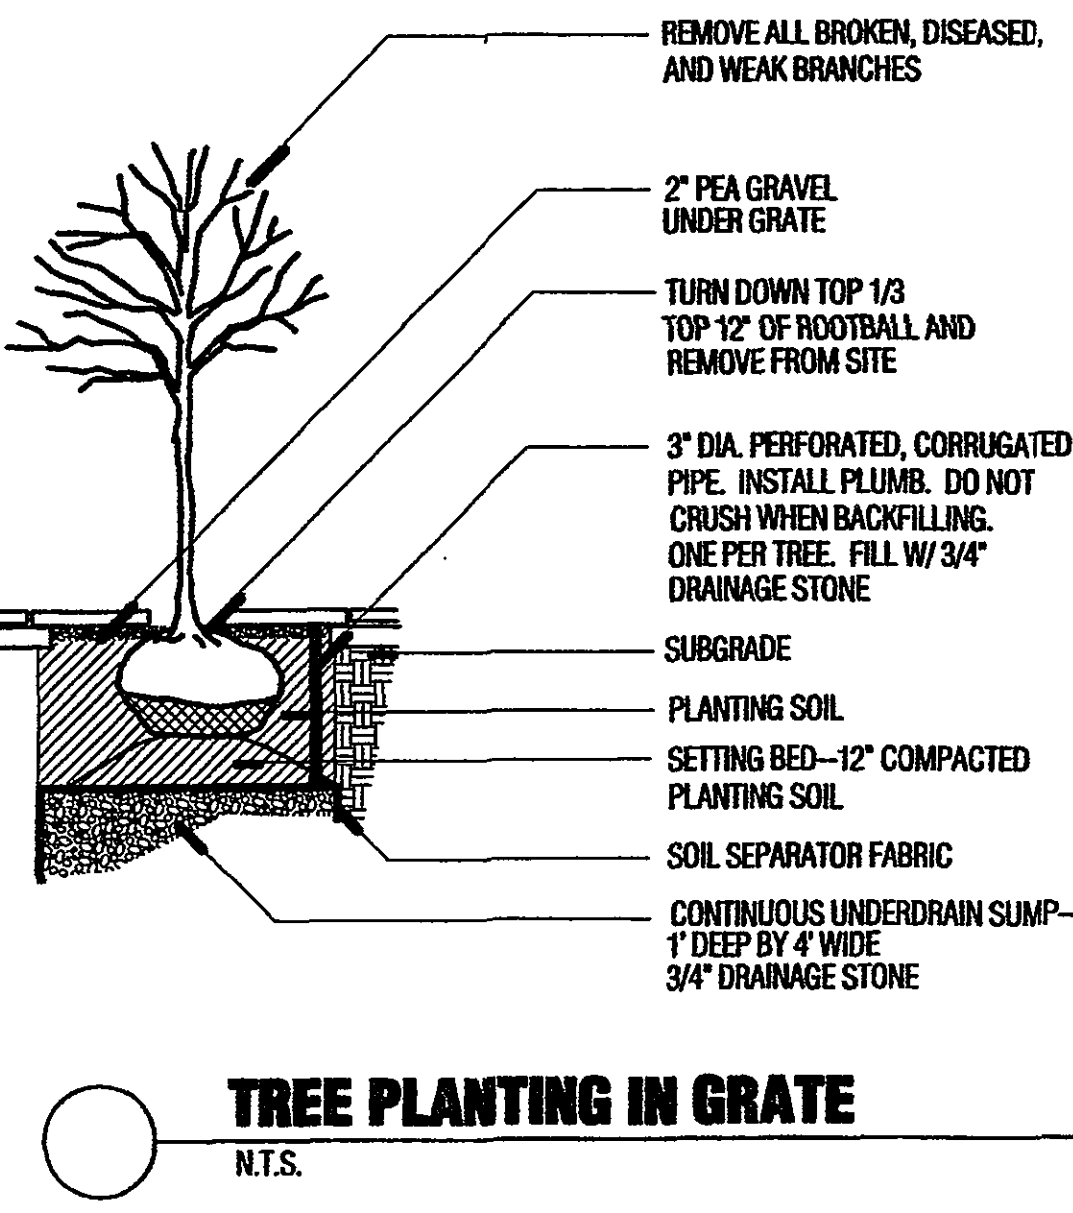

PERKINS & WILL
Architecture • Interiors • Planning
1282 Peachtree Street NE
Atlanta, Georgia 30309 USA
404.873.2300 Fax: 404.892.5823
Boston • Charlotte/FFP • Chicago • Dallas
Los Angeles • Miami • Minneapolis • New York

Rife + Wood ARCHITECTS
128 South End Avenue, Virginia Beach, VA 23462
(703) 366-8100 Fax: (703) 366-8102

In association with:
Caldwell White - Civil Engineers
4203 Melrose Avenue
Roanoke, Virginia 24017
T: 540.389.8455
F: 540.366.8702
The Fish Studio Landscape Architects
1740 20th Street, NW
Washington, DC 20009
T: 678.553.5200
F: 678.553.5270
Kinsey Shomo & Associates - Architects and Structural Engineers
201 West Main Street
Salem, Virginia 24153
T: 540.389.9455
F: 540.389.9130
Lawrence Perry & Associates, Inc. Mechanical & Electrical Engineers
304 West Church Avenue
Roanoke, Virginia 24011
T: 540.342.1810
F: 540.344.3410
Faassen & Associates - Food Service
8526 Sunflower Road
Charlotte, North Carolina
T: 704.535.9234
F: 704.535.4020
vanBlaricom & Frantz - Interior Designers
112 West Kirk Avenue
Roanoke, Virginia 24015
T: 540.344.4098
F: 540.344.4295

PATRICK HENRY HIGH SCHOOL

PHASE 1
School Site Project No. 124-39A
Literary Loan No. 11187

Revisions		

PLANTING PLAN-SOUTH