



\\Drawings\2005\06006\eng\06006comp.dwg

06006comp-11-020.dwg

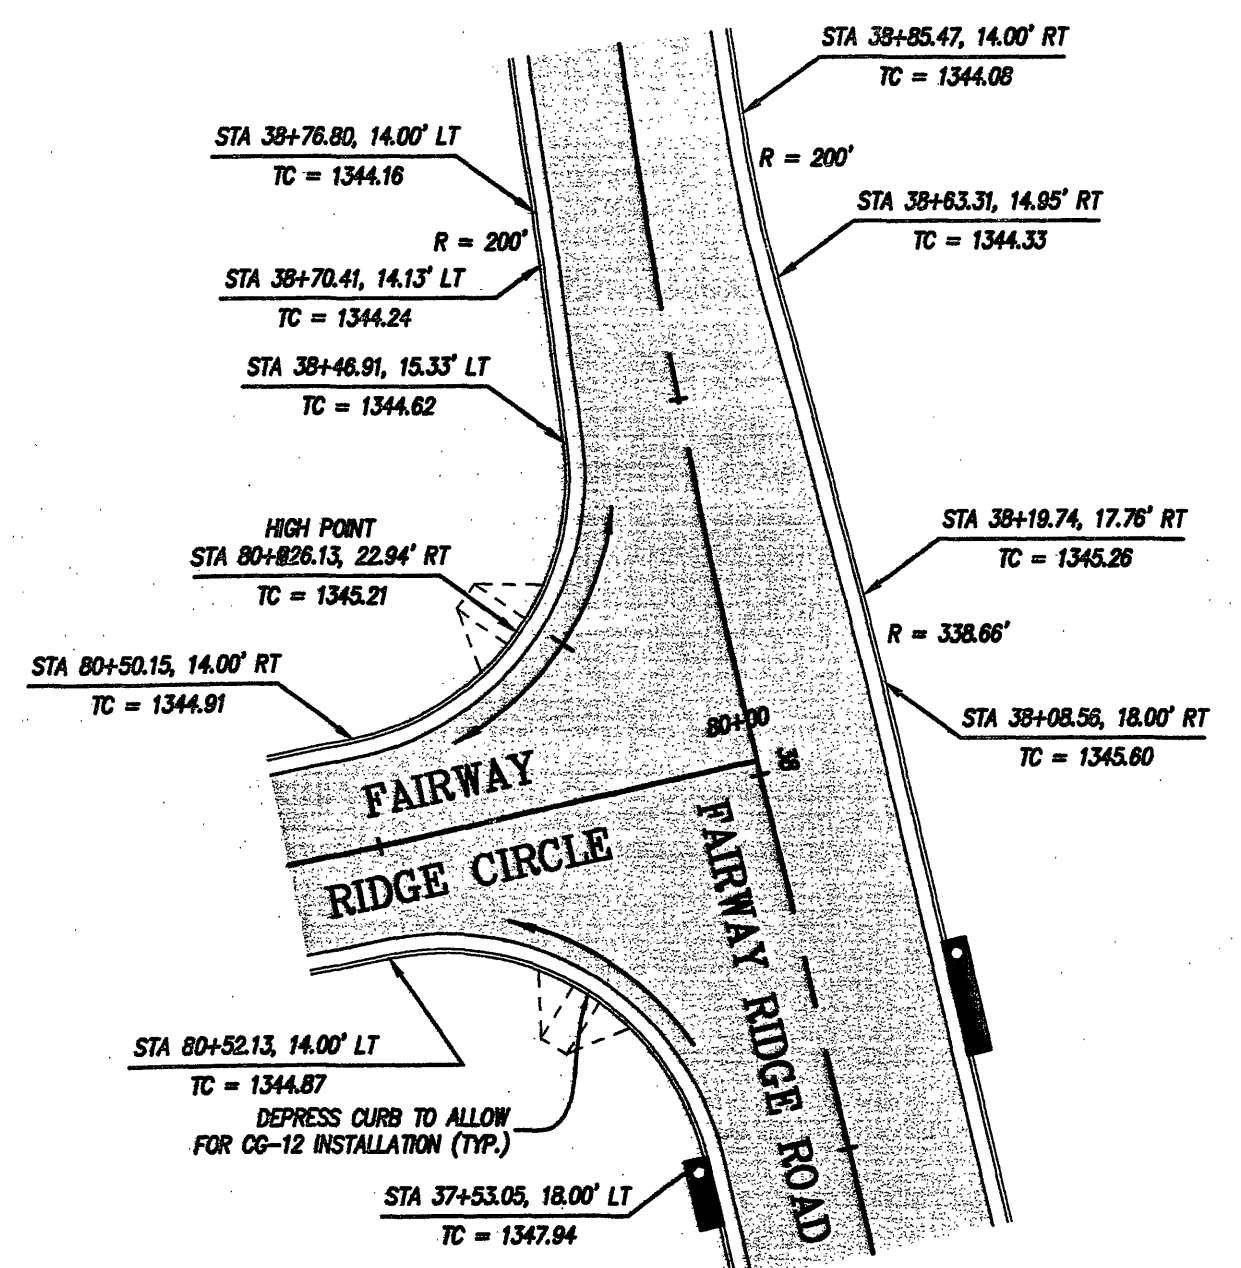

- NOTES
1. ALL WATER AND SANITARY SEWER LINES SHALL HAVE A MINIMUM OF 3.0 FEET OF COVER.
 2. MAINTAIN A MINIMUM OF 18" CLEARANCE FROM OUTSIDE OF PIPE TO OUTSIDE OF PIPE AT ALL WATER, SANITARY SEWER, AND STORM DRAIN CROSSINGS. WHERE THIS CLEARANCE CAN NOT BE ACHIEVED, CONCRETE PIERS SHALL BE UTILIZED IN ACCORDANCE WITH THE WESTERN WATERS AUTHORITY'S WATER AND SANITARY SEWER STANDARDS.
 3. SANITARY SEWER LINE MATERIAL SHALL BE PVC, SDR-35, EXCEPT AS NOTED, OR APPROVED EQUAL.
 4. WATER LINE MAIN PIPE MATERIAL SHALL BE C900, DR-14, EXCEPT AS NOTED, OR APPROVED EQUAL.
 5. ALL NEW DROP INLETS AND STORM DRAIN MANHOLES SHALL HAVE 100T STD. IS-1, INLET SHAPING.
 6. SAFETY SLABS (100T STD. IS-1) ARE REQUIRED IN ALL DRAINAGE STRUCTURES WITH A DEPTH OF 12.0 FEET OR GREATER. THE SPACING OF THE SLABS SHOULD BE 8 TO 12 FEET WITH NO SAFETY SLAB LOCATED WITHIN 6 FEET FROM THE TOP OR BOTTOM OF THE STRUCTURE.
 7. ALL DRAINAGE STRUCTURES OVER 4.0 FEET OF DEPTH SHALL HAVE 100T STANDARD STEPS (ST-1).

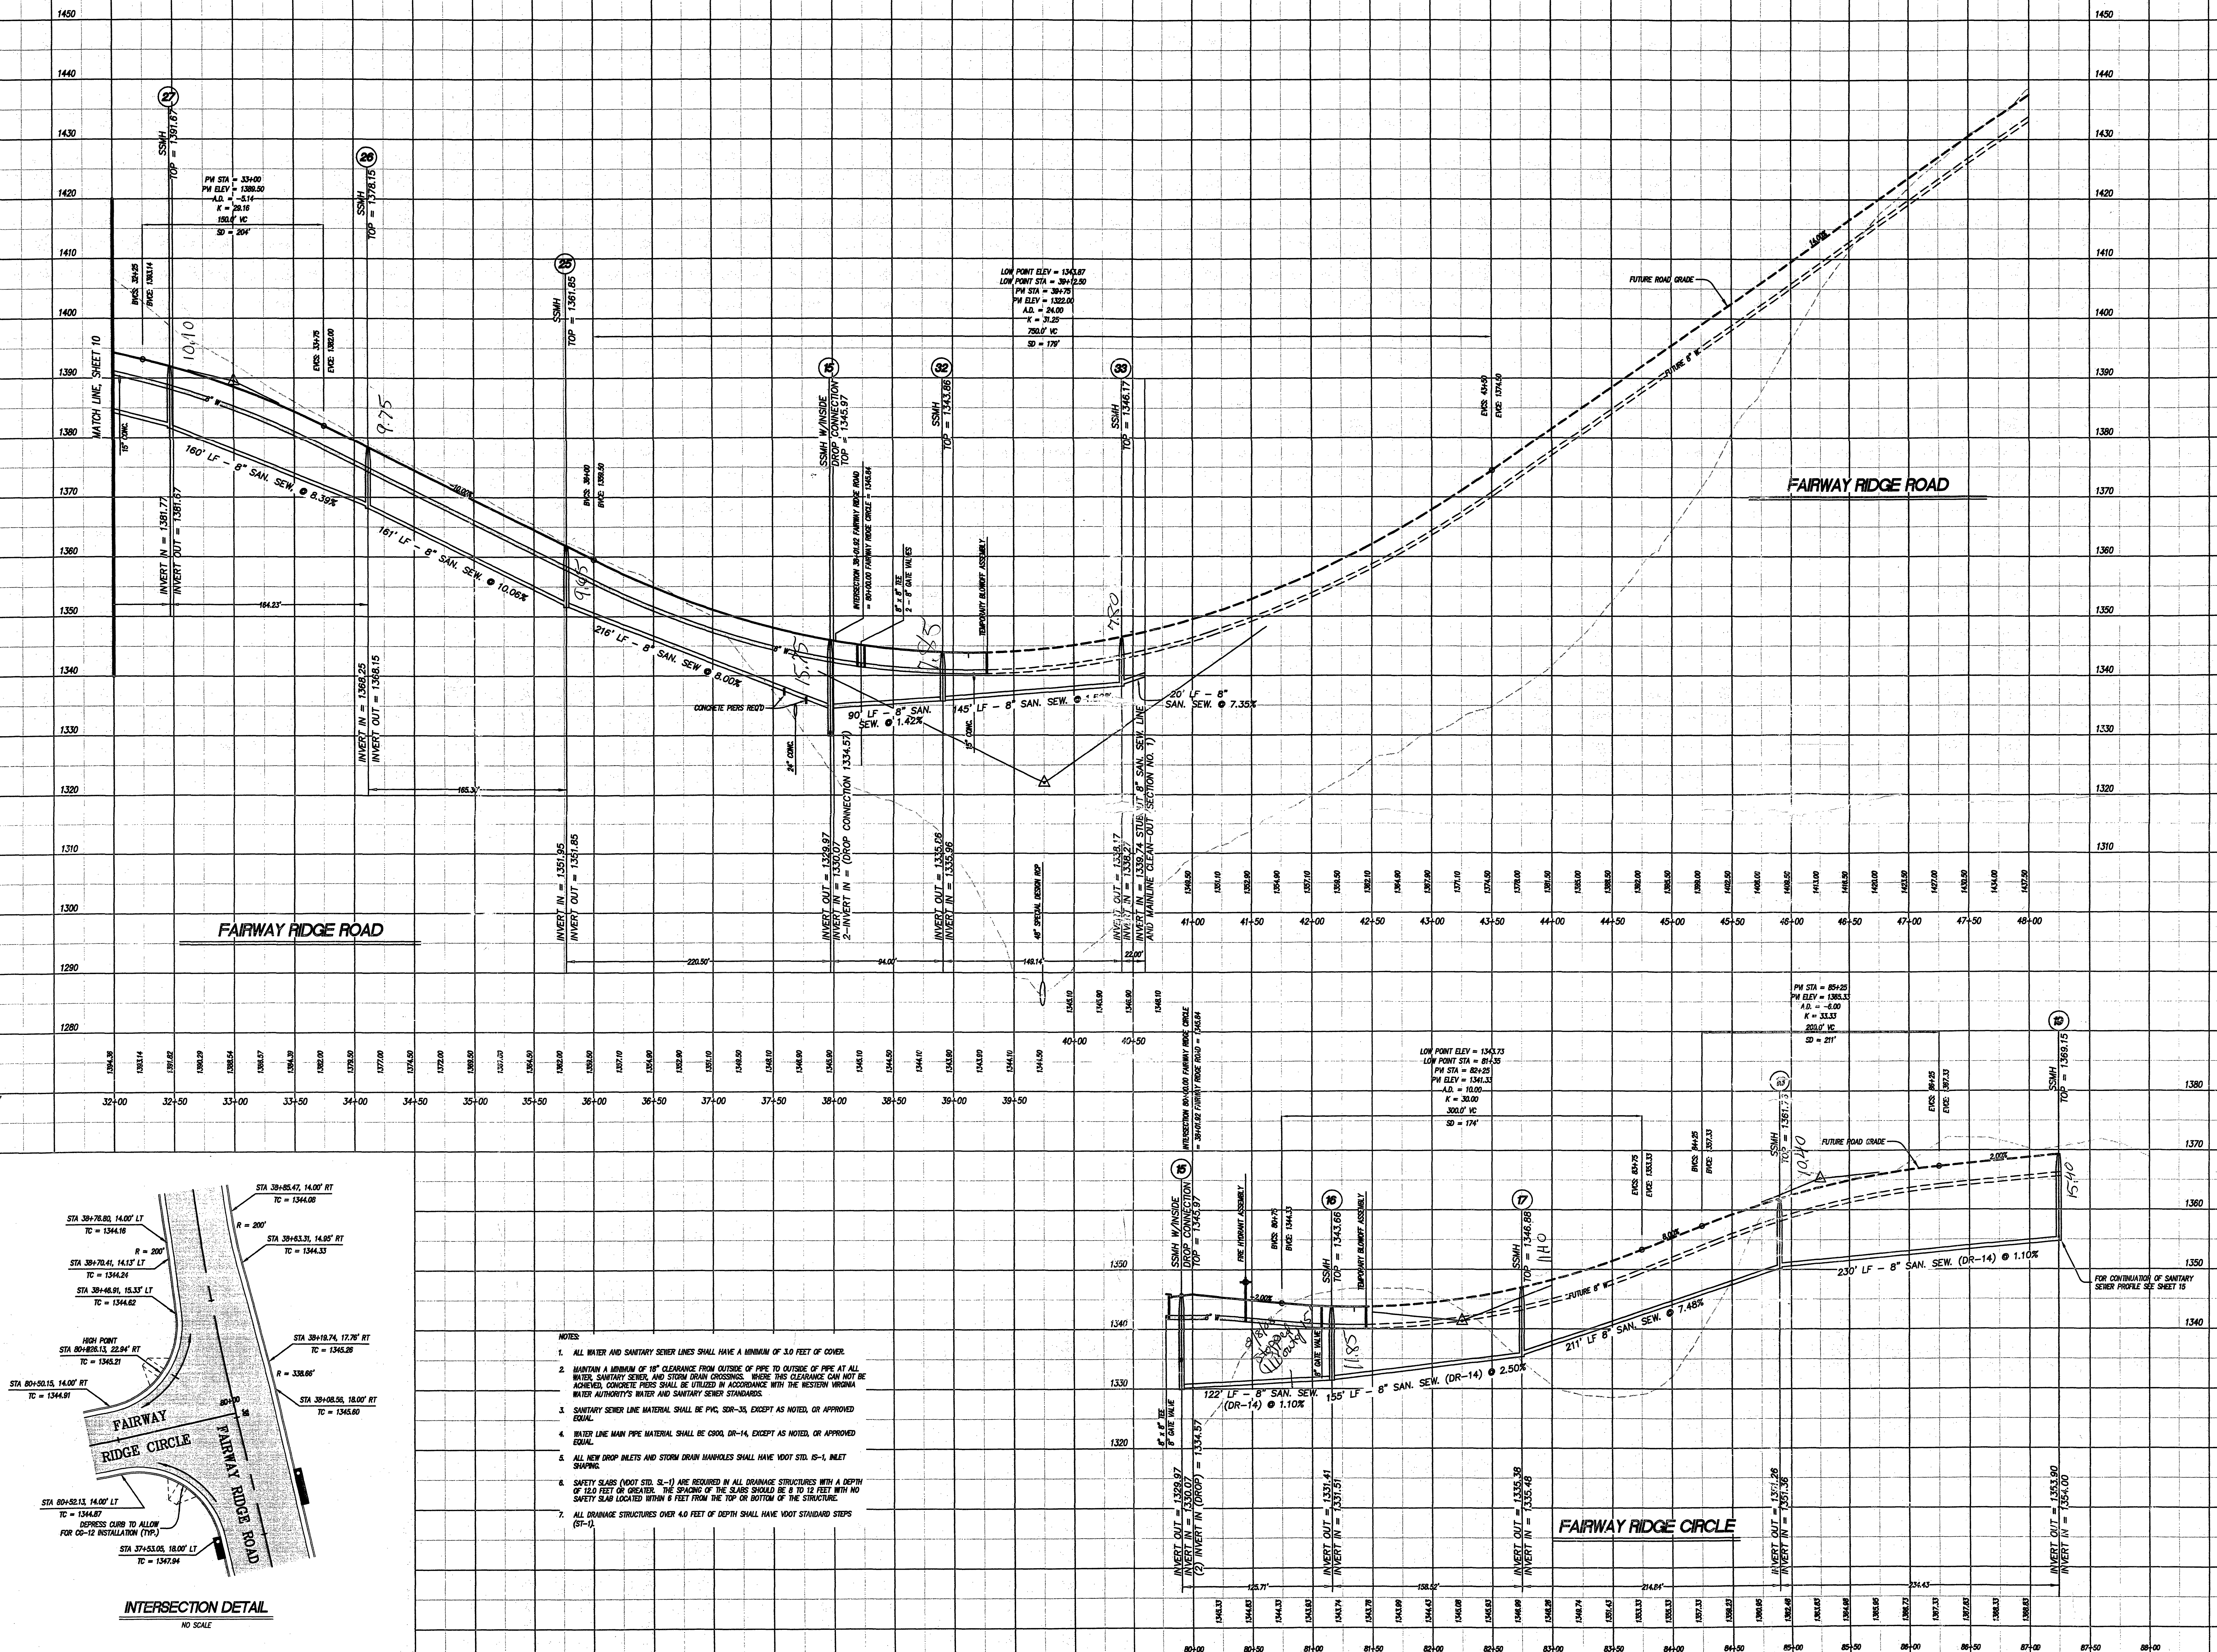

REVISIONS		NO.	DATE	DESCRIPTION
1		1		
2		2		
3		3		
4		4		

DATE: January 1, 2006


SCALE: (H) 1"=50' (V) 1"=10'

COMMISSION NO.:

SHEET 1

SECTION No. 1
"THE RIDGE AT FAIRWAY FOREST"
PREPARED FOR
BOONE HOMES, INC. OF ROANOKE
WINDSOR HILLS MAGISTERIAL DISTRICT
ROANOKE COUNTY, VIRGINIA

ROAD
PROFILES

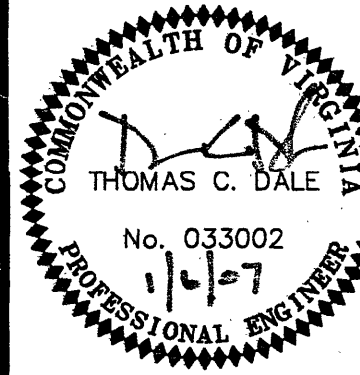

LUMSDEN ASSOCIATES, P.C.
ENGINEERS-SURVEYORS-PLANNERS
ROANOKE, VIRGINIA

1664 BRAMBLETON AVENUE
P.O. BOX 20669
ROANOKE, VIRGINIA 24018

PHONE: (540) 774-4411
FAX: (540) 772-9445
E-MAIL: MAIL@LUMSDENPC.COM