GENERAL NOTES

PRE-CONSTRUCTION MEETING AND CONSTRUCTION COMMENCEMENT:

- 1. All construction methods and materials shall conform to the Construction Standards and Specifications of Roanoke County, the Western Virginia Water Authority, and the Virginia Department of Transportation.
- 2. Stormwater Management Agreements with an attached 8 1/2" x 11" or 8 1/2" x 14" plat must be approved and recorded prior to the pre-construction meeting.
- 3. Once all required items are submitted to the County of Roanoke, the developer must contact the Development Review Coordinator to indicate that a pre-construction meeting needs to be scheduled. The pre-construction meeting will be scheduled with the owner/developer two (2) working days later.
- 4. All land disturbing projects that require approval of an erosion and sediment control plan, grading or clearing permit shall require that the applicant provide the name of an individual who will be responsible for land disturbing activities and that this individual hold a Responsible Land Disturber (RLD) Certificate from the Department of Environmental Quality. The Responsible Land Disturber can be anyone from the Project team that is certified by the Commonwealth of Virginia to be in charge of carrying out the land disturbing activity for the project.
- 5. It is the responsibility of the owner/developer to notify the certified Responsible Land Disturber and the Utility Contractor to attend the pre-construction meeting.
- 6. The Development Review Coordinator will schedule the pre-construction meeting with the County Review Engineer, the County Inspector, and the Western Virginia Water Authority and the Town of Vinton Public Works Department if applicable.
- 7. An approved set of plans, Storm Water Pollution Prevention Plan (SWPPP), VSMP
- coverage letter, and all permits must be available at the construction site at all times. 8. The developer and/or contractor shall supply all utility companies with copies of approved plans, advising them that all grading and installation shall conform to
- 9. The project engineer will inform the owner/developer verbally and in writing of the County's obligation to perform inspections on site. Everyone in the meeting will be required to sign a pre-construction checklist indicating their knowledge of Roanoke County's obligation to perform inspections on site.
- 10. The Erosion Control Permit or Combined Erosion Control & VSMP Permit is given to the developer at this pre-construction meeting.
- 11. Notify the County of Roanoke prior to beginning installation of ESC measures. The County will inspect initial installations to ensure compliance with approved plan prior to start of grading. The developer SHALL contact the project inspector 24 hours before beginning any grading or construction on the property.
- 12. County inspectors must inspect storm drain / stormwater management / BMP installations during the process of installation. Please contact the site inspector 24
- 13. All work shall be subject to inspection by Roanoke County, the Western Virginia Water Authority and the Virginia Department of Transportation Inspectors.
- 14. Contractors shall notify utilities of proposed construction at least two (2), but not more than ten (10) working days in advance. Area public utilities may be notified thru "Miss Utility": 1-800-552-7001 or VA 811.
- 15. The 100 year Floodway shall be staked prior to any construction.
- 16. Grade stakes shall be set for all curb and gutter, culvert, sanitary sewer and storm sewer at all times of construction.
- 17. The Department of Community Development shall be notified when a spring is encountered during construction.
- 18. Construction debris shall be containerized in accordance with the Virginia Litter Control Act. No less than one litter receptacle shall be provided on site.
- 19. The contractor shall provide adequate means of cleaning mud from trucks and/or other equipment prior to entering public streets or rights of ways. It is the contractors responsibility to insure that the streets are in a clean, mud and dust free condition at
- 20. Plan approval in no way relieves the developer or contractors of the responsibilities contained within the erosion and sediment control or stormwater management policies.
- 21. Field construction shall honor proposed drainage divides as shown on plans.
- 22. Field corrections shall be approved by the Roanoke County Engineering Division and/or the Western Virginia Water Authority and the Professional of Record, prior to
- 23. The developer or contractor shall supply the County and the Western Virginia Water Authority with correct As-Built plans before final acceptance.


VIRGINIA DEPARTMENT OF TRANSPORTATION:

- 24. Plan approval by Roanoke County does not guarantee issuance of any permits by the Virginia Department of Transportation.
- 25. A permit must be obtained from the Virginia Department of Transportation, Salem Residency Office prior to construction in the highway right-of-way.
- 26. The preliminary pavement designs should be based on a predicted sub-grade CBR value of 7.0 and with a Resiliency Factor (RF) of 2.0 as shown in Appendix I of the 2000 Virginia Department of Transportation Pavement Design Guide for Subdivision and Secondary Roads. The sub-grade soil is to be tested by an independent laboratory and the results submitted to the Virginia Department of Transportation prior to base construction. Should the sub-grade CBR value and/or the RF value be less than the predicted values, additional base material will be required in accordance with Departmental specifications. Refer to the same manual as the number and locations of the required soil samples to be tested. All pavement designs shall be submitted to the Department for review and approval. The sub-grade shall be approved by the Virginia Department of Transportation prior to placement of the base. Base shall be approved by the Virginia Department of Transportation for depth, template, and compaction before the surface is applied.
- 27. Standard guardrail with safety end sections may be required on fills or in areas where hazards exist as deemed necessary. After completion of rough grading operations, the County Engineer and Virginia Department of Transportation shall be contacted to schedule a field review. Where guard rail is warranted, the standard shoulder width shall be provided and the guard rail shall be installed in accordance with the 2001 VDOT Road and Bridge Standards as part of this development.
- 28. Standard street and traffic control signs shall be erected at each intersection by the developer prior to final street acceptance.
- 29. All traffic devices shall be in accordance with current edition of the "Manual on Uniform Traffic Control Devices" (MUTCD).
- 30. All unsuitable material shall be removed from the construction limits of the roadway before placing embankment.

See Sheet C13 for Stormwater Site Statistics Table. See Sheet C13 for New BMP Information Table.

The Project Engineer shall provide electronic copies of the approved plans to the Development Review Coordinator within 5 working days of the pre-construction

The notes on this sheet shall not be modified.

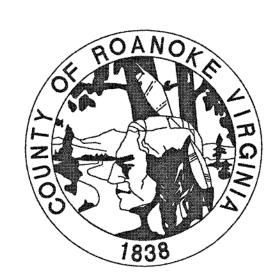

COUNTY OF ROANOKE, VA

HEREBY CERTIFY THAT I AGREE TO COMPLY WITH THESE REQUIREMENTS ND THE THIRTY (30) POINTS SHOWN ON THIS COVER SHEET UNLESS ODIFIED IN ACCORDANCE WITH LOCAL LAW.
S, P.E. 540-772-9580 FAX 540-772-8050

WATER NOTES

All water facilities shall be constructed according to the Western Virginia Regional Design and Construction Standards (Latest Edition).

A minimum cover of three (3) feet is required over proposed lines.

Contractor shall be responsible for locating and uncovering valve vaults after paving and adjustment to final grade if necessary.

All existing utilities may not be shown in their exact location. The contractor shall comply with the (State Water Works Regulations, Section 12VAC5-590-1150, where lines cross.


All trenches in existing or future highway right-of-ways shall be compacted according to Virginia Department of Transportation

Lines shall be staked prior to construction.

Water main shall be minimum Class 350 Ductile Iron in accordance to AWWA C151 or DR-14 PVC in accordance with AWWA C-900.

Ductile Iron Pipe in accordance with the Western Virginia Regional Design and Construction Standards shall be required for all pipe with a working pressure equal to or greater than 100 p.s.i.

Western Virginia Water Authority Availability letter number: _____

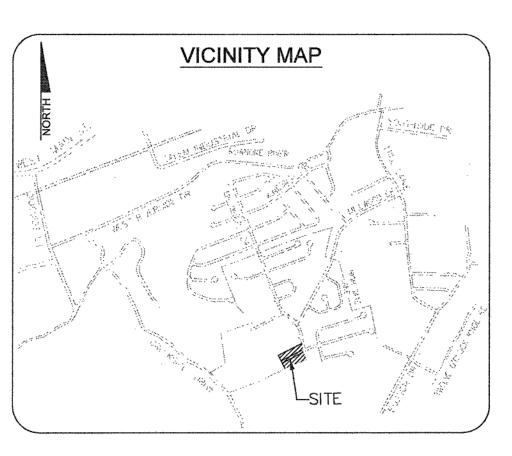

LECEND

	LEGEND
Property Line	
Right-of-way	quarter properties and the constraints of the c
Centerline	•
Minimum Building Line	
Existing Storm Sewer	
Existing Sanitary Sewer	rius prosessassassassassas (t. 4 SAN) suura tehnirius uura aa a
Existing Water Main	8" WL
Existing Contour	1155
Proposed Contour	
Proposed Drainage Divide	жеждай мерация организация организация организация организация организация организация организация организация -
Proposed Limits of Clearing	
Proposed Storm Sewer	
Proposed Sanitary Sewer	8" SS
Proposed Water Main	8" W
To Be Removed	T.B.R.

SEWER NOTES

All sanitary sewer facilities shall be installed according to the Western Virginia Regional Design and Construction Standards. (Latest Edition).

A minimum cover of three (3) feet is required over proposed lines. Contractor shall be responsible for locating and uncovering all manholes after

paving. Manhole tops shall be adjusted to grade if necessary. All existing utilities may not be shown in their exact location. The contractor shall comply with (State Water Works Regulations, Section 12VAC5-590-1150, where

All trenches in existing or future rights-of-way shall be compacted according to Virginia Department of Transportation standards. Lines shall be staked prior to construction.

PRIVATE UTILITIES

Underground utilities installed on private property or in private utility easements and building related storm drains shall be designed and installed per the current edition of the Virginia Uniform Statewide Building Code. Design and installation requirements issued by the Western Virginia Water Authority that meet or exceed the USBC requirements are acceptable for private utilities. All private utilities are to be permitted through and inspected by the Roanoke County Inspections Office. Vaults, valves and other devices installed by or under the control of the Western Virginia Water Authority may not substituted for the code required devices.

C1 C2 C3 C4 C5 C6 C7 C8 C9 C10 C11 C12 C13 C14	OVERALL PLAN GENERAL NOTES LAYOUT & UTILITY PLAN GRADING PLAN RUSSLEN DRIVE & WATERLINE PROFILE SANITARY PROFILE STORM SEWER PROFILES I E.S.C. PLAN — PHASE I E.S.C. PLAN — PHASE II E.S.C. NOTES E.S.C. DETAILS CONSTRUCTION DETAILS WESTERN VA REGIONAL DETAILS

Sheet Index

SURVEY INFORMATION

Ву:	BALZEF	R AND ASSO	CIATES, INC. (E	3 & A, INC.)
				etic Vertical Datum of 1929 or 1988 can Datum of 1927 or 1983.
Horizontal D	oatum: INST.#2	201706985	Vertical Datum:	1988
Source of to	pographic mappi	ng is dated	2018 BY B &	A, INC.
Boundary w	as performed by	B & A, INC.	dated:	2018
Benchmark	Information:	CURB INLE		

be accurate and correct.

EARING AND GRUBBING		UNIT	UNIT PRICE C	OST BONDABLE
PTHMORK	20,000	AC	62.00	
RTHWORK BANKMENT	20,000	C.Y.	\$3.00	\$60,000.00
SANKMENI		C.Y.		
T STD. DI-7	6	EA	\$1,500.00	\$9,000.00
DT STD. DI-3B	4	EA	\$1,500.00	\$6,000.00
OT STD. MH-1	1	EA	\$1,000.00	\$1,000.00
N. TYPE S HDPE PIPE	635	LF	\$25.00	\$15,875.00
N. TYPE S HDPE PIPE	610	LF	\$45.00	\$27,450.00
		deministration de services de menorementes condemités dibber de fination		
	•			

			<u> </u>	
		·	_	
	_			
AP - CLASS	1	CE		
NF - VLAGO		SF		
MANENT GRASS SWALE	_	LF		
THE THE STATE OF T	_	LF	<u> </u>	
	1			
	1			
	1			
HALT PAVEMENT SECTION	1,530	SY	\$10.00	\$15,300.00
B & GUTTER CG-6	1,020	LF	\$16.00	\$16,320.00
VEL BASE - TURNAROUND	405	SY	\$10.00	\$4,050.00

ATER LINE	450	LF	\$40.00	\$18,000.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER	1 1	EA	\$1,400.00	\$1,400.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER	1 1	EA EA	\$1,400.00 \$1,200.00	\$1,400.00 \$1,200.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE	1 1 2	EA EA	\$1,400.00 \$1,200.00 \$750.00	\$1,400.00 \$1,200.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE	1 1	EA EA	\$1,400.00 \$1,200.00	\$1,400.00 \$1,200.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE	1 1 2	EA EA	\$1,400.00 \$1,200.00 \$750.00	\$1,400.00 \$1,200.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE	1 1 2	EA EA EA	\$1,400.00 \$1,200.00 \$750.00	\$1,400.00 \$1,200.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE	1 1 2	EA EA EA	\$1,400.00 \$1,200.00 \$750.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00
ATER LINE WOFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE	1 1 2 7 7 · · · · · · · · · · · · · · · · ·	EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00	\$1,400.00 \$1,200.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER IDARD MANHOLE W/FRAME & COVER	1 1 2 7	EA EA EA LF	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00
ATER LINE NOFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE WITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER	1 1 2 7	EA EA EA LF EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - SINGLE	1 1 2 7 560 2 1	EA EA EA LF EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00
ATER LINE V OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER TARY SEWER LATERAL - SINGLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - SINGLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE MITARY SEWER MDARD MANHOLE W/FRAME & COVER TARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE MITARY SEWER MDARD MANHOLE W/FRAME & COVER TARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE MITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER TARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE V OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE NITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE V OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE NITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE V OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE NITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE WITTER SEWER WITTER SERVICE - DOUBLE WITTER SEWER WITTER SEWER WITTER SEWER WITTER SEWER WITTER SEWER SERVICE - DOUBLE WITTER SEWER SEWER SERVICE - DOUBLE WITTER SEWER SEWER SERVICE - DOUBLE	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER IDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER TARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE DSCAPING NITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC)	1 1 2 7 560 2 1 10	EA EA EA LF EA EA EA EA EA EA EA EA EA	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00
ATER LINE N OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER DENTIAL WATER SERVICE - SINGLE DENTIAL WATER SERVICE - DOUBLE INITARY SEWER NDARD MANHOLE W/FRAME & COVER TARY SEWER LATERAL - SINGLE TARY SEWER LATERAL - DOUBLE DSCAPING NITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC)	1 1 2 7 7 560 2 1 1 10 3 3	EA EA EA EA LS LS	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$2,000.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00 \$6,000.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE IDENTIAL WATER SERVICE - DOUBLE ANITARY SEWER NDARD MANHOLE W/FRAME & COVER ITARY SEWER LATERAL - SINGLE ITARY SEWER LATERAL - DOUBLE DSCAPING NITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC)	1 1 2 7 7 560 2 1 1 10 3 3	EA EA EA EA LS LS	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$2,000.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00 \$6,000.00
ATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE IDENTIAL WATER SERVICE - DOUBLE ANITARY SEWER NDARD MANHOLE W/FRAME & COVER ITARY SEWER LATERAL - SINGLE ITARY SEWER LATERAL - DOUBLE DSCAPING NITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC) BUILT PLANS (STORM SEWER SYSTEMS)	1 1 2 7 7 560 2 1 1 10 3 3	EA EA EA EA LS LS	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$2,000.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00 \$6,000.00
WATER LINE W OFFS W/ VAULT, FRAME & COVER GATE VALVES, W/ VAULT, FRAME & COVER IDENTIAL WATER SERVICE - SINGLE IDENTIAL WATER SERVICE - DOUBLE ANITARY SEWER NDARD MANHOLE W/FRAME & COVER IDARD FRAME & COVER ITARY SEWER LATERAL - DOUBLE DSCAPING INITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC) BUILT PLANS (STORM SEWER SYSTEMS)	1 1 2 7 7 560 2 1 1 10 3 3	EA EA EA EA LS LS	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$2,000.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00 \$6,000.00 \$1,000.00
WATER LINE WATER LINE WYOFFS WY VAULT, FRAME & COVER GATE VALVES, WY VAULT, FRAME & COVER SIDENTIAL WATER SERVICE - SINGLE SIDENTIAL WATER SERVICE - DOUBLE ANITARY SEWER NDARD MANHOLE WIFRAME & COVER NDARD FRAME & COVER IITARY SEWER LATERAL - SINGLE IITARY SEWER LATERAL - DOUBLE ENITIES (INCLUDING BUT NOT LIMITED TO TRAILS, ETC) BUILT PLANS (STORM SEWER SYSTEMS) FTOTAL CONTINGENCY	1 1 2 7 7 560 2 1 1 10 3 3	EA EA EA EA LS LS	\$1,400.00 \$1,200.00 \$750.00 \$1,000.00 \$50.00 \$3,000.00 \$1,500.00 \$2,000.00 \$1,500.00	\$1,400.00 \$1,200.00 \$1,500.00 \$7,000.00 \$28,000.00 \$6,000.00 \$1,500.00 \$6,000.00 \$1,000.00 \$1,000.00

QUANTITY & COST ESTIMATE

REFLECTING TOMORROW

www.balzer.cc PLANNERS • ARCHITECTS ENGINEERS • SURVEYORS

1208 Corporate Circle Roanoke, Virginia 24018 Phone: 540/772-9580 FAX: 540/772-8050

15871 City View Drive Midlothian, Virginia 23113 Phone: 804/794-0571 FAX: 804/794-2635

448 Peppers Ferry Road Christiansburg, Virginia 24073 Phone: 540/381-4290 FAX: 540/381-4291

1561 Commerce Road Suite 401 Verona, Virginia 24482 Phone: 540/248-3220 FAX: 540/248-3221

DRAWN BY:

DESIGNED BY:

CHECKED BY:

REVISIONS:

DATE:

KRO

5/9/2019

10/1/2019

Lic. No. 47338 10/1/19

CHRISTOPHER P. BURNS

Materials

Monholes CP+P 8" SDR 35+26 NCDG SDR ZLO Diamond 4" SDR ZLO NOPCO

8" C900 Blue Brute

&" Values AVK

Frame of Covers Capital

100

<u>G</u>

SHEET No .: