


THIS DRAWING HAS BEEN PREPARED FOR WORK IN AND AROUND LOWES PROPERTY. REFER TO NOTES ON THIS DRAWING OR THE FOLLOWING NOTES:

1. WORK IN AND AROUND LOWES DRIVEWAY AREAS TO BE COORDINATED WITH LOWES STORE OPERATIONS.
2. DETAILS FOR HEAVY DUTY PAVING, STANDARD DUTY PAVING, AND CURB & GUTTER ARE ON DRAWING C.
3. EROSION AND SEDIMENT CONTROL REQUIREMENTS AND NOTES ARE FOUND ON DRAWINGS & .
4. DOCUMENT USING PHOTOGRAPHS ALL EXISTING LANDSCAPING. ANY LANDSCAPING DISTURBED AS A RESULT OF THIS CONSTRUCTION ACTIVITY SHALL BE REPLACED IN KIND.
5. DEVELOPER AND CONTRACTOR TO COORDINATE WITH LOWES PROPERTY MANAGER & LOWES RETROFIT PROJECT MANAGER PRIOR TO CONSTRUCTION START. ON-SITE PRE-CONSTRUCTION MEETING WILL BE REQUIRED PRIOR TO CONSTRUCTION.
6. CONTRACTOR TO REPAIR/REPLACE ANY EXISTING UTILITIES INCLUDING CONDUIT AND WIRING THAT IS DAMAGED DURING CONSTRUCTION.
7. ALL WORK PERFORMED ON LOWES PROPERTY TO BE PERFORMED PER LOWES STANDARDS AND SPECIFICATIONS.
8. ALL WORK PERFORMED ON LOWES PROPERTY TO BE REVIEWED AND INSPECTED BY LOWES PROPERTY MANAGEMENT DEPARTMENT AND RETROFIT CONSTRUCTION DEPARTMENT.
9. CONTRACTOR TO USE ROAD SIGNS TO RE-ROUTE TRAFFIC DURING CONSTRUCTION AS NECESSARY.
10. AFTER CONSTRUCTION, PAVEMENT, AND STABILIZATION OF VEGETATED AREAS, CONTRACTOR SHALL CLEAN OUT SEDIMENT CONTROL BASIN TO ORIGINAL CONDITION PRIOR TO CONSTRUCTION.
11. CONTRACTOR TO VISIT SITE AFTER EACH RAINFALL EVENT TO INSPECT EROSION AND SEDIMENT CONTROL DEVICES. CONTRACTOR SHALL ADJUST/CLEAN ALL DEVICES TO ASSURE THEY ARE IN WORKING ORDER.
12. CONTRACTOR TO STAY WITHIN 30' WIDE TEMPORARY CONSTRUCTION EASEMENT (15' EITHER SIDE OF STORM LINE).

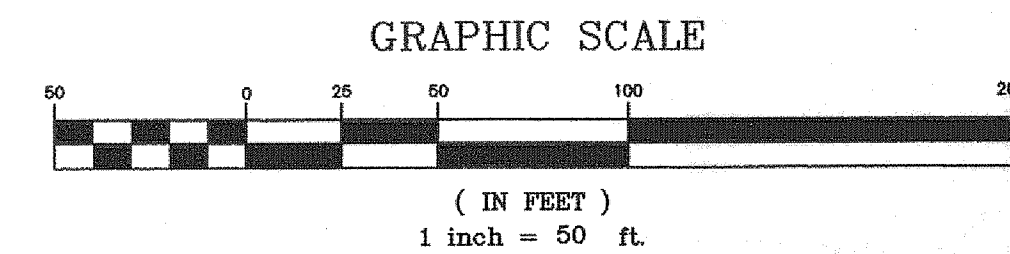

THERE ARE TWO PROPOSED STORM LINES THAT WILL TIE INTO THE EXISTING INLETS LOCATED AT THE BACK OF THE EXISTING LOWES WALL. THE EXISTING GEOGRID STARTS JUST BELOW THE 1ST ROW OF BLOCK AND IS INSTALLED ON EVERY OTHER COURSE OF BLOCK AS YOU GO DEEPER. THE DEPTH OF THE PROPOSED STORM LINES IS SHALLOW, APPROXIMATELY 2'. CONTRACTOR TO USE CARE TO DISTURB AS LITTLE AS POSSIBLE GEOGRID DURING THE INSTALLATION OF THE PROPOSED STORM LINES. CONTRACTOR TO CONSULT WITH A GEOTECHNICAL ENGINEER AS TO THE PROPER METHOD OF REINSTALLING THE GEOGRID AT THE TIME OF CONSTRUCTION.

EXISTING LOWES SEGMENTAL BLOCK RETAINING WALL

APPROXIMATE EXTENTS OF GEOGRID EMBEDMENT

EXISTING LOWES SEGMENTAL BLOCK RETAINING WALL

EXISTING LOWES SEGMENTAL BLOCK RETAINING WALL

30' WIDE CONSTRUCTION EASEMENT

CONSTRUCTION OF THE PROPOSED STORM LINE WILL INTERFERE WITH THE EXISTING SEGMENTAL BLOCK RETAINING WALL. A PORTION OF THE WALL WILL HAVE TO BE DISASSEMBLED AND REASSEMBLED. THE LOCATION OF THE EXISTING GEOGRID BEHIND THIS WALL IS NOT KNOWN. CONTRACTOR TO USE CARE TO DISTURB AS LITTLE AS POSSIBLE GEOGRID DURING THE INSTALLATION OF THE PROPOSED STORM PIPE. CONTRACTOR TO CONSULT WITH A GEOTECHNICAL ENGINEER AS TO THE PROPER METHOD OF REINSTALLING THE GEOGRID AT THE TIME OF CONSTRUCTION.


INSET DRAWING SCALE: 1" = 40'

THIS DRAWING IS FROM A SET PREPARED BY ANDERSON & ASSOCIATES FOR THE CONSTRUCTION OF THE LOWES FACILITY DATED 02/11/99. IGNORE ORIGINAL CONSTRUCTION NOTES. DRAWING IS INTENDED TO SHOW THE EXTENTS OF THE POND AND THE EROSION & SEDIMENT CONTROL MEASURES ONLY.

parker
DESIGN GROUP

816 Boulevard
Salem, Virginia 24153
Phone: 540-387-1153
Fax: 540-389-5767
www.parkerdg.com

These documents are the property of Parker Design Group (PDG) and may not be reproduced or used without the express permission of PDG. Any reuse of these documents without authorization of PDG will be at the sole risk of the individual or entity utilizing said documents.

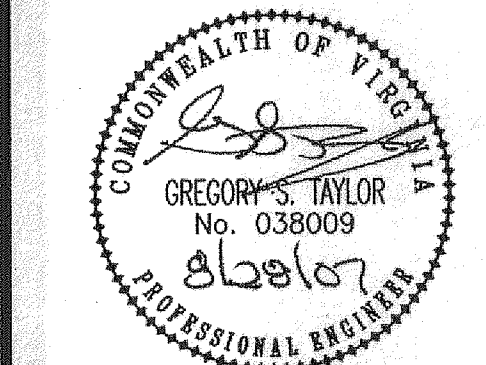

Site Development Plan Prepared for Slate Hill II, LLC Cave Spring Magisterial District Roanoke, Virginia

REVISIONS:

County & VDOT Comment Revisions	August 8, 2006
County & VDOT Comment Revisions	October 20, 2006
County WYWA & VDOT Revisions	December 8, 2006
County WYWA & VDOT Revisions	January 12, 2007
County WYWA & VDOT Revisions	March 2, 2007
County WYWA Revisions	March 30, 2007
Added Dwg C08A - Lowes Revisions	August 28, 2007

DESIGNED BY: GST
DRAWN BY: GST
CHECKED BY: SRB
SCALE: 1" = 50'
DATE: April 7, 2006

SHEET TITLE:
Requirements for
Working on
Lowes Property

C08A
08 OF 60
PROJECT NUMBER:
S05047-03