

STORMWATER MANAGEMENT COST ESTIMATE ALL COSTS GIVEN ARE COMPLETE IN PLACE DESCRIPTION QUANTITY UNIT COST TOTAL COST 550.00 | \$ 550.00 LEARING & GRUBBING LS EXCAVATION 390.00 78 5.00 EMBANKMENT FENCING 2,500.00 12,500.00 STRUCTURES ACCESS ROAD 2,500.00 2,500.00 AS-BUILTS \$ 15,950.00 SUB-TOTAL \$ 1,594.00 10% CONTINGENCY TOTAL PROJECT COST \$ 17,544.00 SEDIMENT BASIN SCHEMATIC **ELEVATIONS**

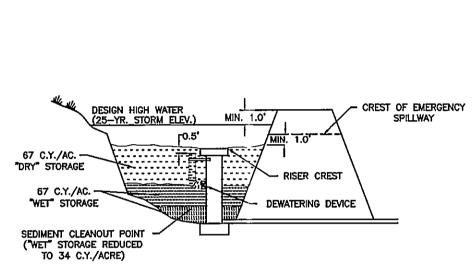

DESIGN ELEVATIONS WITH

EMERGENCY SPILLWAY

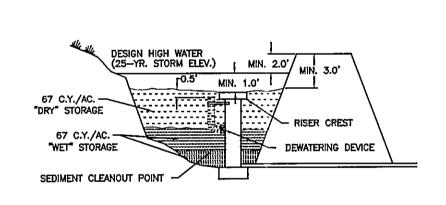

DESIGN ELEVATIONS WITHOUT EMERGENCY SPILLWAY (RISER PASSES 25-YR. EVENT)

GENERAL NOTES

- . DESIGN OF DETENTION BASINS SHALL CONFORM TO THE REQUIREMENTS OF THE COUNTY OF ROANOKE DRAINAGE STANDARDS (REF. SECTIONS 503.02, 503.03, AND 505.02). THE DESIGN OF THE FACILITY AND PREPARATION OF AS-BUILT PLANS SHALL BE BY A CERTIFIED PROFESSIONAL ENGINEER LICENSED TO PRACTICE IN THE COMMONWEALTH
- 2. ACCESS TO THE FACILITY MUST BE PROVIDED IN ACCORDANCE WITH THE COUNTY OF ROANOKE DESIGN AND CONSTRUCTION STANDARDS FOR DETENTION PONDS, LATEST EDITION.
- 3. IF THE FACILITY IS OVER FOUR (4) FEET DEEP, TAKES OVER TWO (2) HOURS TO DRAIN, OR THE INTERIOR SLOPE EXCEEDS 3 (H): 1 (V), PERMANENT FENCING MAY BE REQUIRED, ADDITIONALLY, IF THE FACILITY IS IN A CONGESTED AREA OR WILL IN ANY WAY POSE A HAZARD TO THE GENERAL PUBLIC, FENCING MAY BE REQUIRED. FENCING SHALL BE A MINIMUM OF SIX (6) FEET HIGH, A MINIMUM OF STANDARD NINE GAUGE LINK FENCE, AND MUST HAVE ONE OR MORE LOCKING DOUBLE GATES (MINIMUM TEN FEET WIDE) FOR ACCESS.
- 4. DETENTION PONDS SHALL BE BONDED IN ACCORDANCE WITH THE ROANOKE COUNTY BONDING POLICY FOR SUBDIVISION AND SITE DEVELOPMENT. A SEPARATE BOND FOR THE DETENTION FACILITY WILL BE REQUIRED AND ADMINISTERED APART FROM THE SUBDIVISION DEVELOPMENT BOND. REFERENCE ESTIMATE - THIS SHEET.
- 5. REFERENCE THE COUNTY OF ROANOKE DESIGN AND CONSTRUCTION STANDARDS FOR DETENTION PONDS, LATEST EDITION, FOR ACCEPTANCE AND MAINTENANCE OF THE FACILITY. CERTIFIED AS-BUILTS ARE REQUIRED AND MUST INCLUDE:
- A. DIMENSIONS OF THE FACILITY
- B. VOLUME @ MAXIMUM DEPTH
- C. ELEVATIONS OF STRUCTURES, SPILLWAYS, AND TOP
- MATERIALS VERIFICATION INCLUDING RESULTS OF DENSITY TESTS CONDUCTED BY AN INDEPENDENT SOIL TESTING LABORATORY
- E. LOCATION AND ELEVATION OF BENCHMARK.
- 6. ONE FOOT MINIMUM FREEBOARD REQUIRED FOR THE 100 YR WATER SURFACE ELEVATION.

CONSTRUCTION NOTES

- . SITE PREPARATION SHALL BE IN ACCORDANCE WITH THE COUNTY OF ROANOKE DESIGN AND CONSTRUCTION STANDARDS FOR DETENTION PONDS,
- 2. SLOPES STEEPER THAN 3 TO 1 (HORIZONTAL TO VERTICAL) SHALL BE BENCHED OR STEPPED PRIOR TO PLACING FILL ON THEM.
- 3. ON-SITE FILL MATERIAL OR BORROW FILL MATERIAL MAY BE UTILIZED. FILL MATERIAL SOILS, IN GENERAL:
- SHALL BE WITHIN AN ACCEPTABLE RANGE OF MOISTURE CONTENT WHICH IS READILY CONTROLLED C. SHALL NOT BE HIGHLY SUSCEPTIBLE TO VOLUME CHANGE

(SHRINKAGE OR SWELL) OR SETTLEMENT

- 4. FILL MATERIALS CONTAINING ROCKS LARGER THAN SIX (6) INCHES (15.2 CM) SHALL NOT BE USED. THE UPPERMOST TWO (2) FEET (61 CM) SHALL NOT HAVE ANY ROCK LARGER THAN TWO (2) INCHES (5.1 CM) IN DIAMETER.
- 5. THE APPROVED FILL SHALL BE PLACED IN EIGHT (8) INCH (20 CM) LOOSE LIFTS. EACH LIFT SHALL BE SPREAD IN UNIFORM LAYERS. FILL SOIL SHALL BE UTILIZED ONLY WITHIN A MOISTURE RANGE OF +/- 5% OF THE OPTIMUM MOISTURE CONTENT. COMPACTION OF THE FILL SHALL BE PERFORMED WITH APPROVED EQUIPMENT. COMPACTION OF THE LAYERS SHALL BE CONTINUOUS AND UNIFORM.
- 6. EMBANKMENT MATERIAL IN FILL AREAS SHALL BE PLACED IN LIFTS NOT EXCEEDING EIGHT (8) INCHES AND SHALL BE COMPACTED TO A MINIMUM 95% DENSITY IN ACCORDANCE WITH SECTION 303 OF THE VIRGINIA DEPARTMENT OF TRANSPORTATION ROAD AND BRIDGE SPECIFICATIONS.
- 7. FIELD DENSITY TESTS ARE TO BE CONDUCTED BY AN INDEPENDENT SOILS TESTING LABORATORY UNDER THE DIRECTION OF A QUALIFIED GEOTECHNICAL ENGINEER. THE RESULTS OF THESE TESTS SHALL BE SUBMITTED TO THE COUNTY OF ROANOKE WITH AS—BUILT PLANS AS A CONDITION OF ACCEPTANCE OF THE FACILITY BY THE COUNTY. FIELD DENSITY TESTS. AS DIRECTED BY THE ENGINEER SHALL BE PERFORMED PERIODICALLY TO DETERMINE THE DEGREE OF COMPACTION. ANY AREAS FAILING TO MEET THE ABOVE REQUIREMENTS SHALL BE REWORKED AND/OR RECOMPACTED UNTIL THE REQUIRED DEGREE OF COMPACTION IS
- 8. ANTI-SEEP COLLARS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION.
- 9. ALL DISTURBED AREAS SHALL BE COVERED WITH FOUR (4) INCHES OF
- 10.THE MINIMUM SLOPE OF THE BASIN "FLOOR SHALL BE ONE (1) PERCENT GRADED TO DRAIN TO THE PRINCIPAL SPILLWAY.


are desirable.


SPECIFIC APPLICATION


This method of inlet protection is applicable


where heavy flows are expected and where

an overflow capability and ease of maintenance

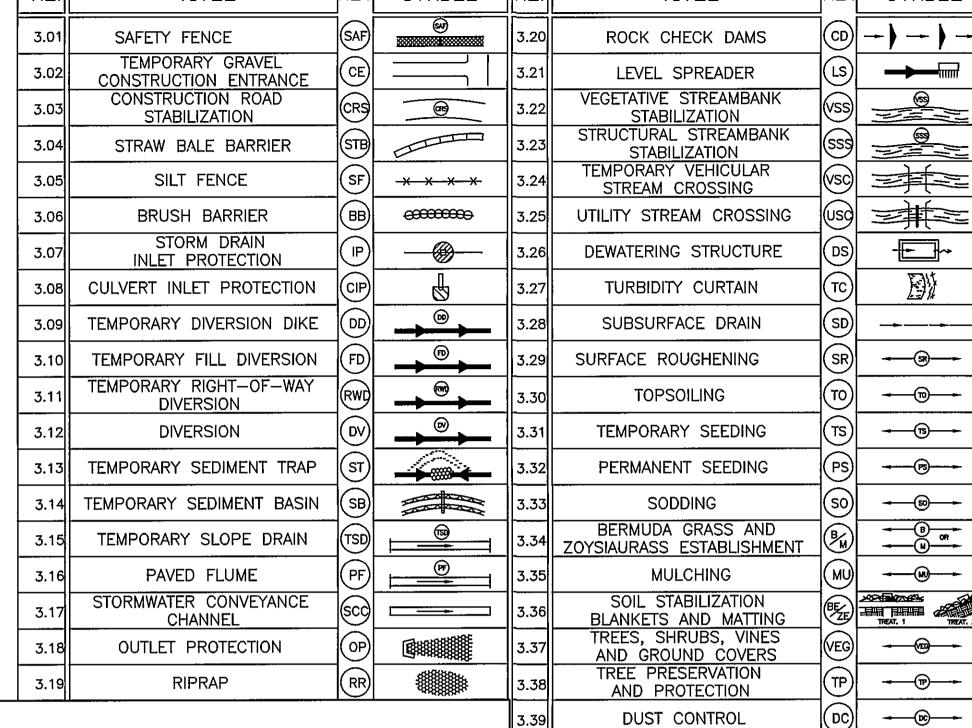

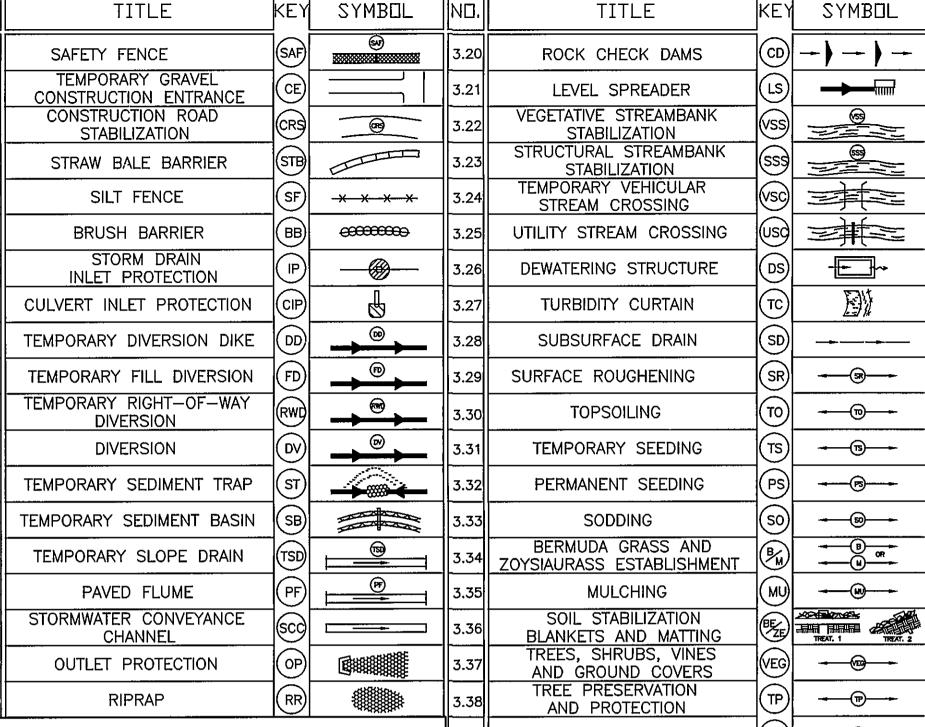

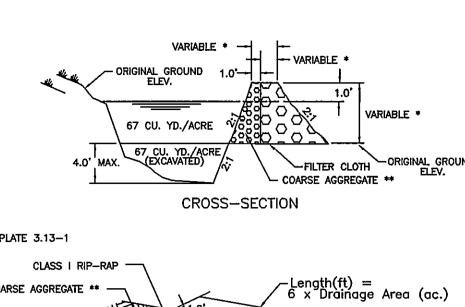

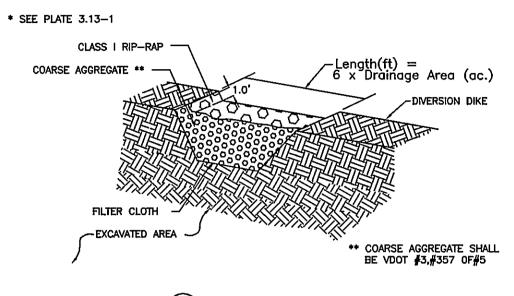

(ST) SEDIMENT TRAP

DESIGN

139

For areas less than 3.0 acres. For areas larger than 3.0 acres, A SEDIMENT TRAP, is required Please see Va' ESC manual for design.

DRAINAGE

AREA (ACRES)

1.00

134


STRUCTUR

ERUSION-SILTATION CONTROL COST ESTIMATE


ALL COSTS GIVEN ARE COMPLETE IN PLACE

ALL COSTS GIVEN ARE	COMPLETE IN	PLACE			
DESCRIPTION	UNIT	QUANTITY	UNIT COST	TOT	AL COST
CONSTRUCTION ENTRANCE	EA	1	\$ 1200.00	\$	1200.00
SILT FENCE	LF	430	3.00		1290.00
INLET PROTECTION	EA	3	100.00		300.00
TEMPORARY DIVERSION DIKE	LF	341	3.00		1023.00
TEMPORARY FILL DIVERSION	LF				
SEDIMENT TRAP	EA	1	500.00		500.00
CHECK DAM	EA	3	100.00		300.00
PERMANENT SEEDING	1000 SF	12	30.00		360.00
OUTLET PROTECTION	EA				
SEDIMENT BASIN	EA				
RIGHT OF WAY DIVERSION	EA	1	100.00		100.00
RIP RAP	EA	1	200.00		200.00
SUB-TOTAL				\$	5273.00
10% CONTINGENCY				\$	527.00
TOTAL PROJECT COST				\$	5800.00
·			<u> </u>		

2 ACRES OR LESS OF DRAINAGE AREA: 2-10 ACRES OF DRAINAGE AREA:

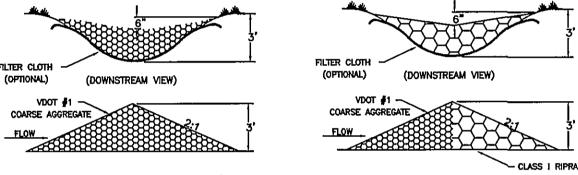

(CD) ROCK CHECK DAM

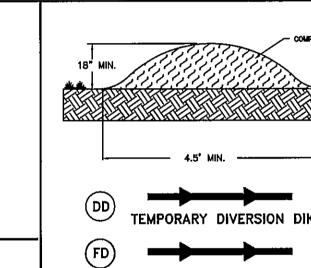

TEMPORARY DIVERSION DIKE TEMPORARY FILL DIVERSION

TEMPORARY RIGHT-OF-WAY DIVERSION DIVERSION


TEMPORARY SEDIMENT TRAP DATA IGENERAL EROSION AND SEDIMENT CONTROL NOTES STORAGE (C.Y.)

6.0'


1.5'


,	1. ALL SOIL EROSION & SEDIMENT CONTROL MEASURES SHALL BE ACCOMPLISHE
	IN STRICT ACCORDANCE WITH THE STANDARDS AND SPECIFICATIONS CONTAINED
	IN THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITIO


- 2. THE APPROVING AUTHORITY MAY ADD TO, DELETE, RELOCATE, CHANGE, OR OTHERWISE MODIFY CERTAIN EROSION AND SEDIMENT CONTROL MEASURES WHERE FIELD CONDITIONS ARE ENCOUNTERED THAT WARRANT SUCH MODIFICATIONS. 3. ALL SOIL EROSION AND SEDIMENT CONTROL MEASURES AS SHOWN ON THE PLAN
- SHALL BE PLACED IN ADVANCE OF THE WORK BEING PERFORMED, AS FAR AS . IN NO CASE DURING CONSTRUCTION SHALL WATER RUNOFF BE DIVERTED OR
- ALLOWED TO FLOW TO LOCATIONS WHERE ADEQUATE PROTECTION HAS NOT BEEN
- 5. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO LEAVE THE SITE ADEQUATELY PROTECTED AGAINST EROSION, SEDIMENTATION, OR ANY DAMAGE TO ANY ADJACENT PROPERTY AT THE END OF EACH DAY'S WORK.
- 6. FOR THE EROSION CONTROL KEY SYMBOLS SHOWN ON THE PLANS, REFER TO THE VIRGINIA UNIFORM CODING SYSTEM FOR EROSION AND SEDIMENT CONTROL PRACTICES CONTAINED IN THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION. THESE SYMBOLS AND KEYS ARE TO BE UTILIZED ON ALL EROSION CONTROL

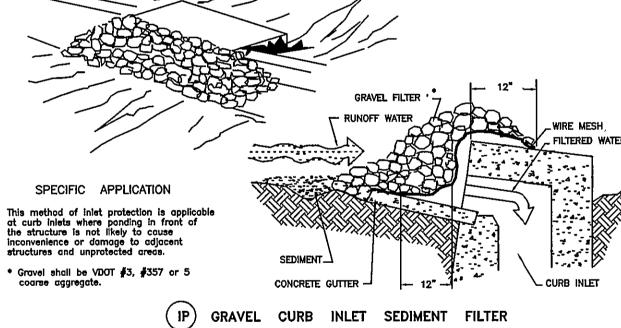



STORM WATER WITH LARGER PARTICLES REMOVED

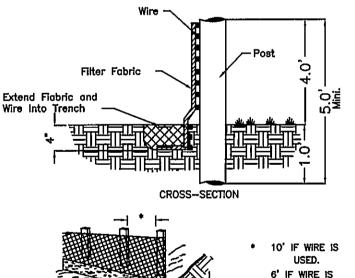

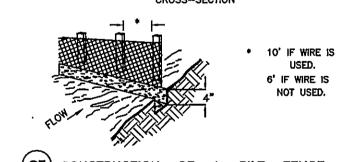

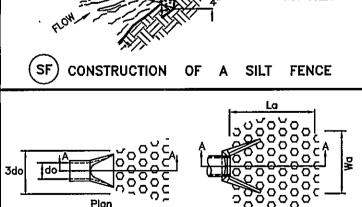


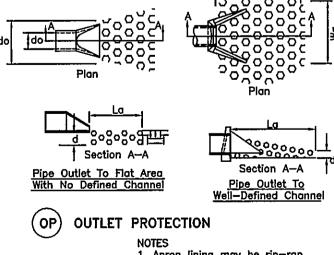

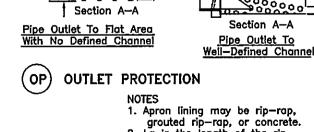


 Apron lining may be rip-rap, grouted rip-rap, or concrete.
 La is the length of the riprap apron as calculated using plates 1.36d and 1.36e.

3. d = 1.5 times the maximum stone diameter, but not less than 6".

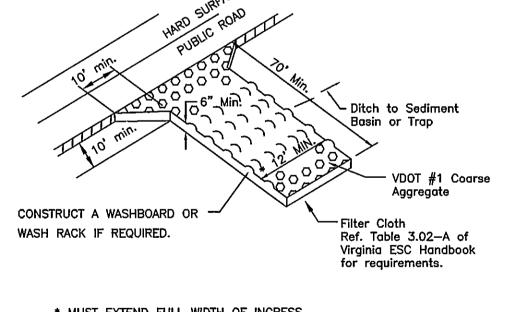

* MUST EXTEND FULL WIDTH OF INGRESS & EGRESS OPERATION.

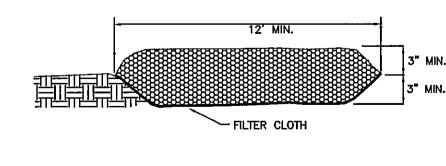

WASH RACK DETAIL (IF REQUIRED)

CE TEMPORARY GRAVEL CONSTRUCTION ENTRANCE

PERMANENT SEEDING MIXTURE

TYPE B (SLOPES 3:1 OR STEEPER) 5 OCTOBER TO 1 FEBRUARY 15 MARCH TO 1 MAY CROWN VETCH © 1/2 LB / 1000 SF PERENNIAL RYEGRASS © 1/2 LB / 1000 SF RED TOP © 1/8 LB / 1000 SF K-31 FESCUE @ 5 LB / 1000 SF BORZY WINTER RYE @ 1/2 LB / 1000 SF FEBRUARY TO 1 JUNE K-31 FESCUE @ 5 LB / 1000 SF ANNUAL RYE @ 1/2 LB / 1000 SF

K-31 FESCUE @ 5 LB / 1000 SF

15 AUGUST TO 1 OCTOBER CROWN VETCH @ 1/2 LB / 1000 SF PERENNIAL RYEGRASS @ 1/2 LB / 1000 SF RED TOP @ 1/8 LB / 1000 SF 1 JUNE TO 1 SEPTEMBER K-31 FESCUE © 5 LB / 1000 SF GERMAN MILLET @ 1/2 LB / 1000 SF 1 SEPTEMBER TO 15 OCTOBER

ANNUAL RYE 1/2 LB / 1000 SF 140 LB / 1000 SF PULVERIZED AGRICULTURAL LIMESTONE 5-20-10 **9** 25 LB / 1000 SF 38-0-0 **9** 7 LB / 1000 SF FERTILIZER:

IF REQUIRED, SHALL BE USED OVER ALL SEEDED AREAS AND SHALL BE APPLIED IN ACCORDANCE WITH SECTION 1.75 OF THE VIRGINIA EROSION MULCH: AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION.

SOIL CONDITIONING: INCORPORATION OF LIME AND FERTILIZER, SELECTION OF CERTIFIED SEED, MULCHING, MAINTENANCE OF NEW SEEDLINGS, AND RESEEDING SHALL BE IN ACCORDANCE WITH SPECIFICATIONS CONTAINED WITHIN THE VIRGINIA SOIL EROSION AND SEDIMENT CONTROL HANDBOOK.

LATEST EDITION. ADDITIONAL SEEDING TO BE PERFORMED AS REQUIRED SEED APPLICATION: APPLY SEED UNIFORMLY WITH A CYCLONE SEEDER, DRILL, CULTIPACKER SEEDER, OR HYDROSEEDER ON A FIRM, FRIABLE, SEEDBED. MAXIMUM SEEDING DEPTH SHALL BE 1/4 INCH.

TOTAL DISTURBED AREA = 1.40 AC. = 60,984 SQ. FT.

DEPARTMENT ENGINEERING AND INSPECTIONS

This method of inlet protection is applicable where heavy concentrated flows are expected, but not where ponding around the structure might cause excessive inconvenience or damage

(IP) GRAVEL AND WIRE MESH DROP INLET SEDIMENT FILTER

SPECIFIC APPLICATION

to adjacent structures and unprotected areas.

* Gravel shall be VDOT #3, #357 or #5 coarse aggregate.

ENGR. & INSPEC.	04-10-93
ENGR. & INSPEC.	08-05-93
ENGR. & INSPEC.	10-27-93
REVISIONS	DATE
	ENGR. & INSPEC. ENGR. & INSPEC.

COUNTY OF ROANOKE

EXCAVATED DROP INLET SEDIMENT TRAP

DRAWING BY: CLN,AF	(G:\CAD\DETAILS\EROS)
DESIGNED BY:	

STRUCTURES OFFICE PARK **EROSION & SEDIMENT CONTROL** STORMWATER MANAGEMENT DETAILS 5 OF 9