

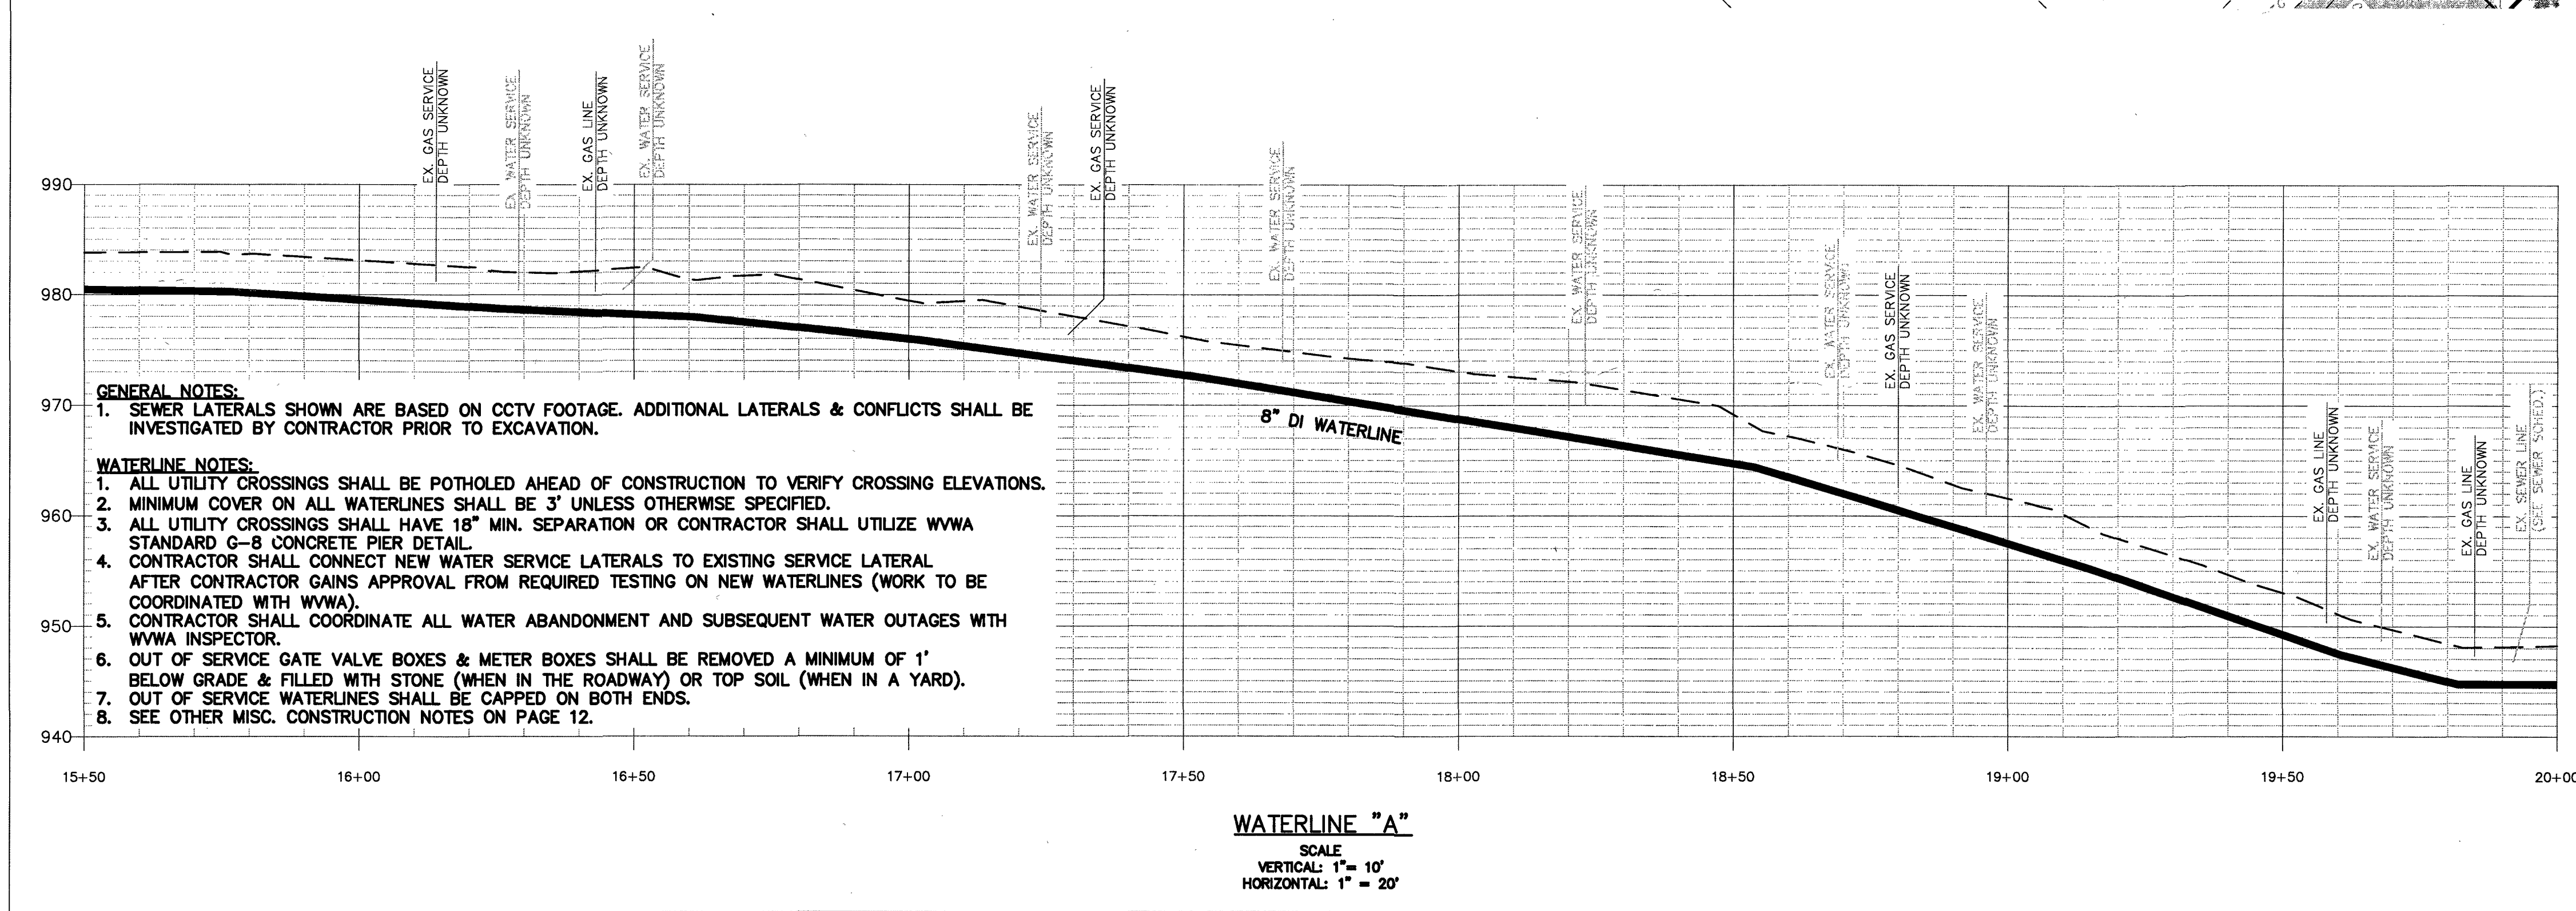
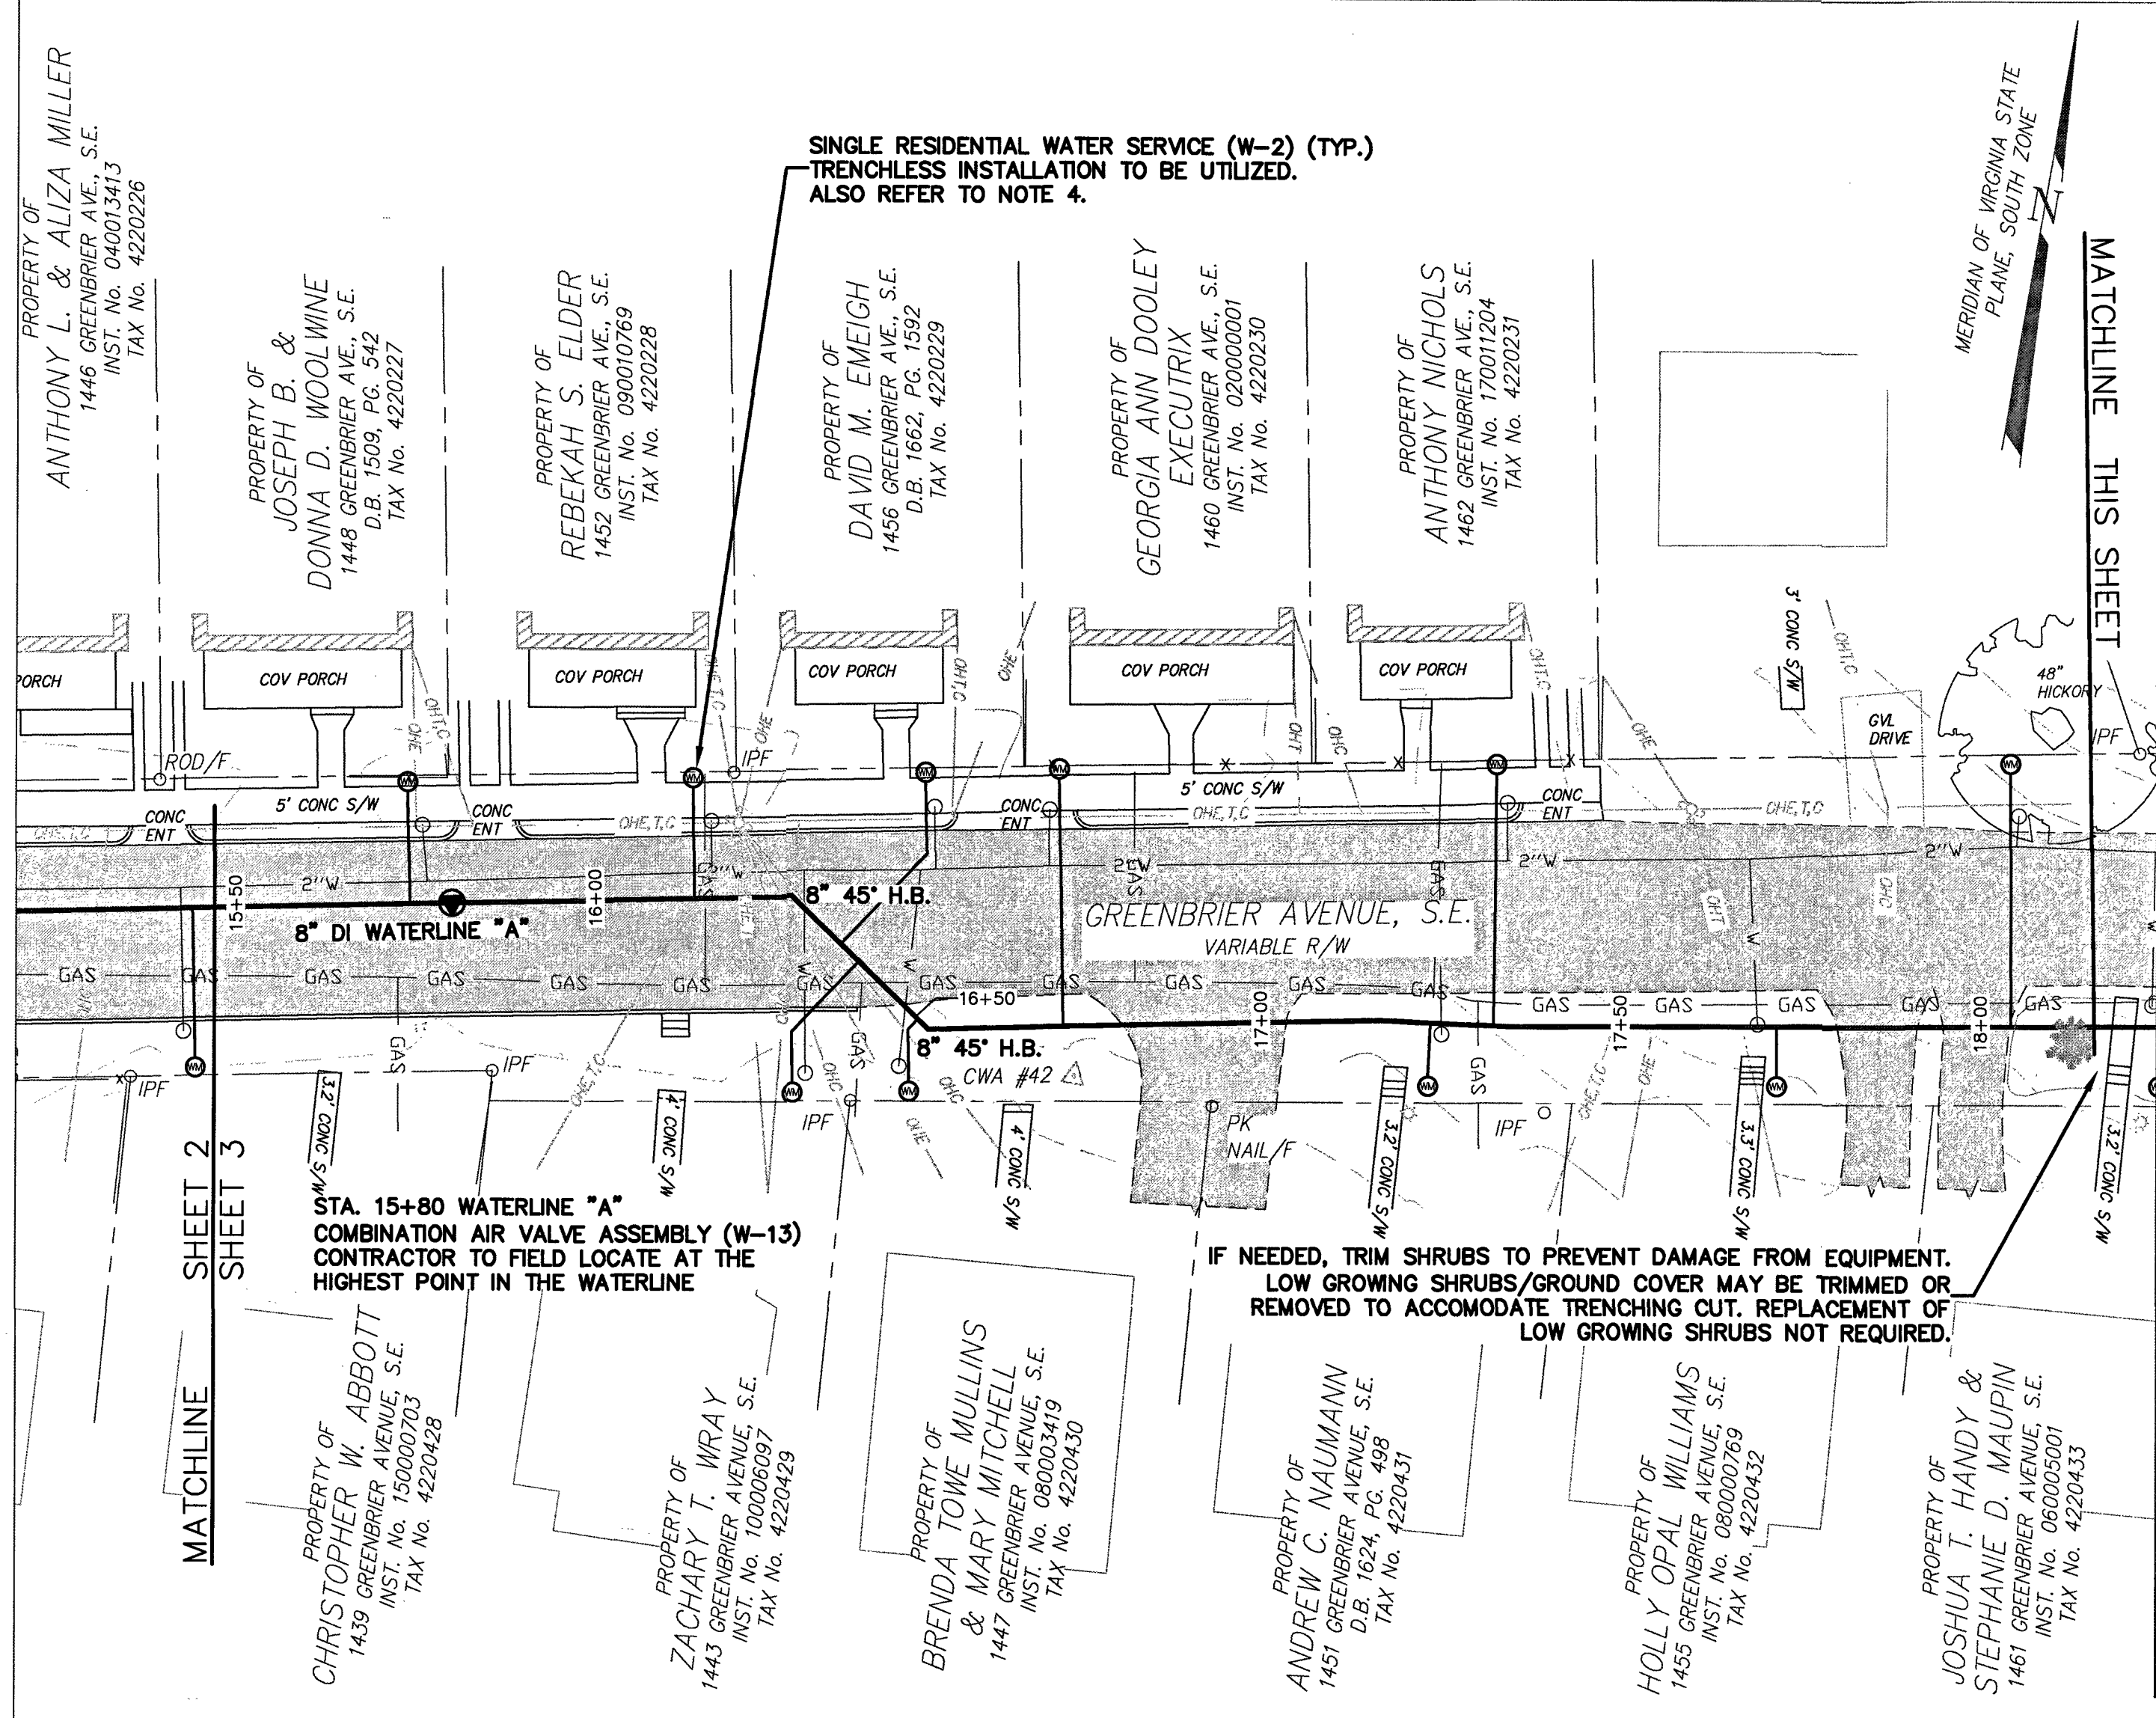


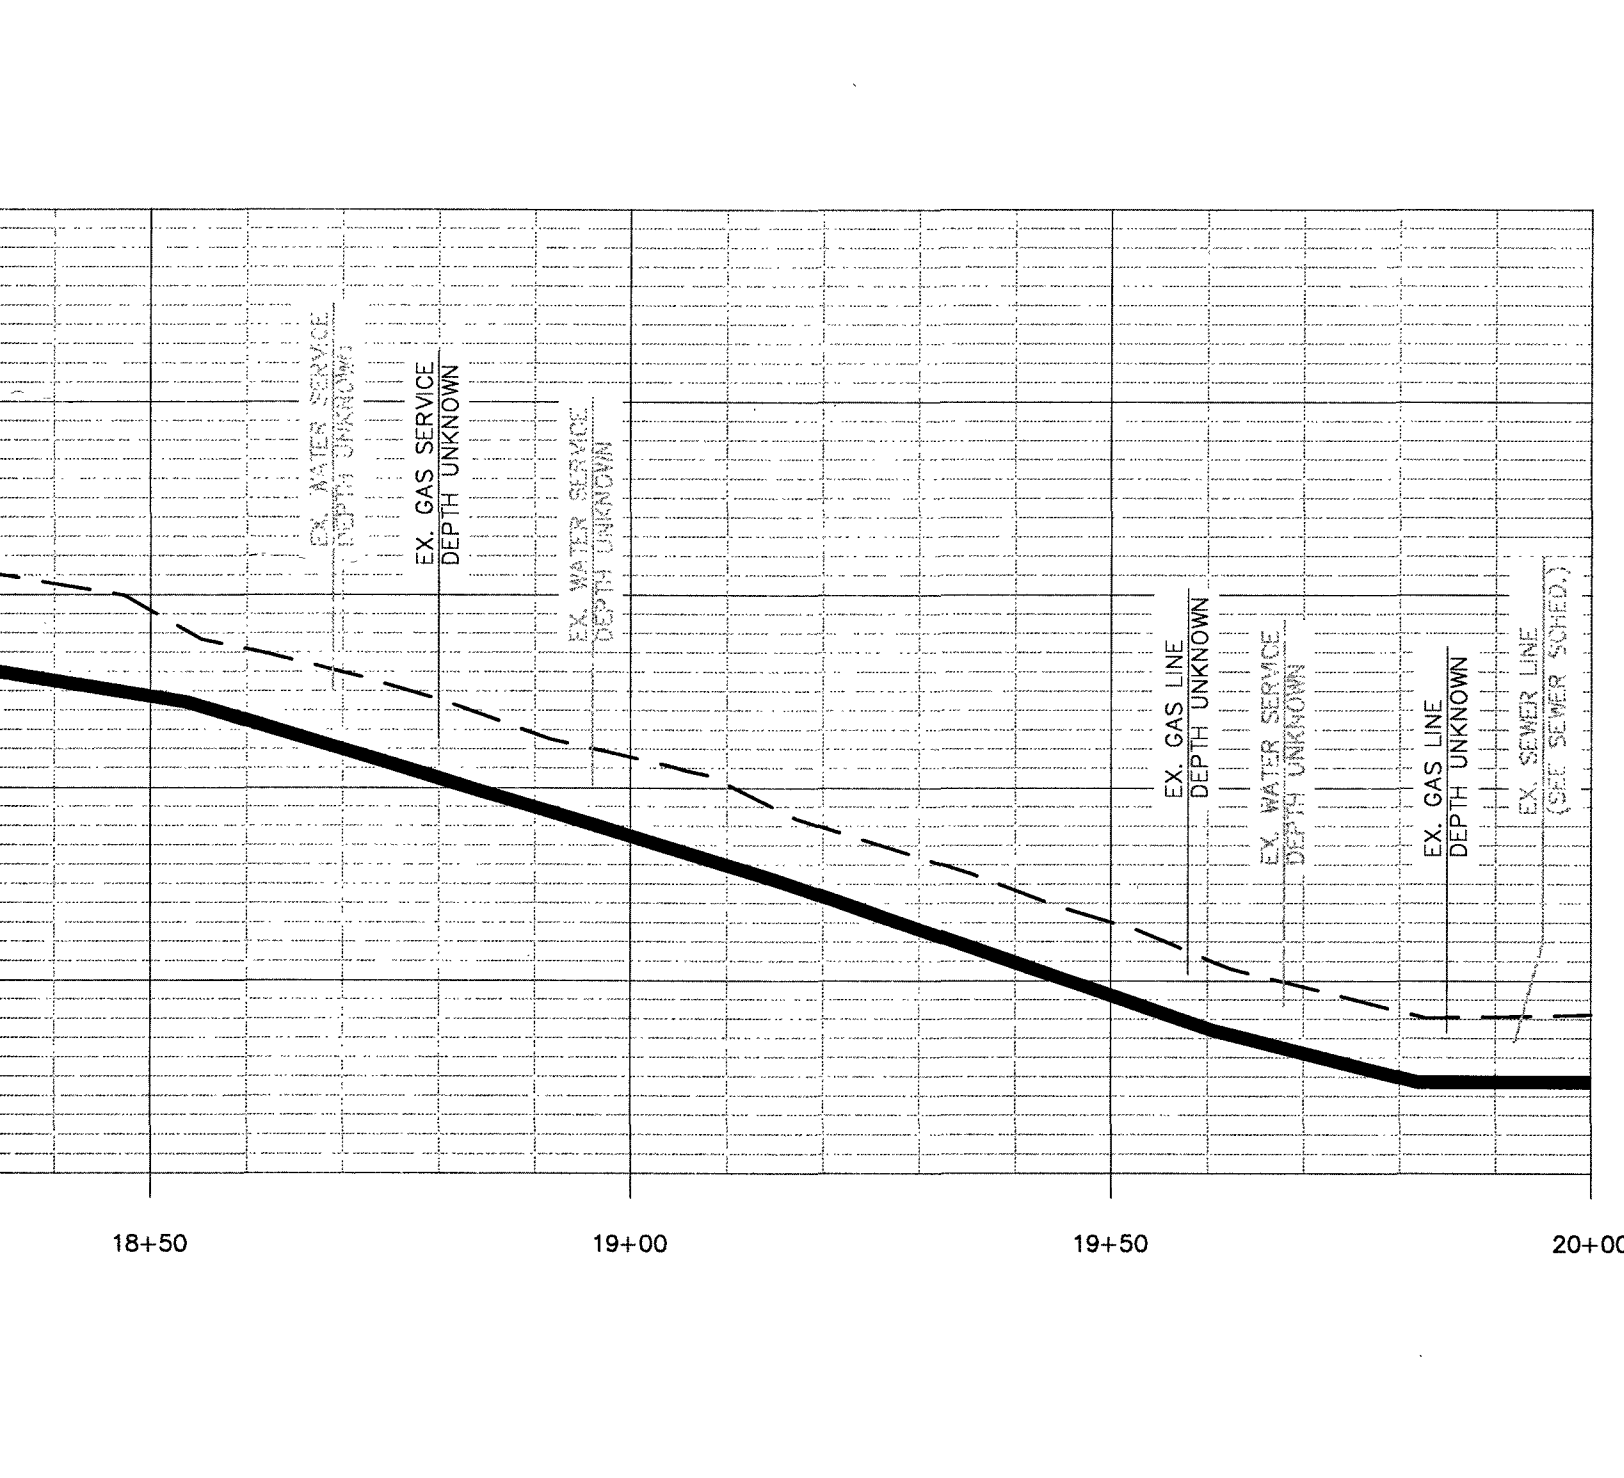


- GENERAL NOTES:**
- SEWER LATERALS SHOWN ARE BASED ON CCTV FOOTAGE. ADDITIONAL LATERALS & CONFLICTS SHALL BE INVESTIGATED BY CONTRACTOR PRIOR TO EXCAVATION.
- WATERLINE NOTES:**
- ALL UTILITY CROSSINGS SHALL BE POTHOLED AHEAD OF CONSTRUCTION TO VERIFY CROSSING ELEVATIONS.
 - MINIMUM COVER ON ALL WATERLINES SHALL BE 3' UNLESS OTHERWISE SPECIFIED.
 - ALL UTILITY CROSSINGS SHALL HAVE 18" MIN. SEPARATION OR CONTRACTOR SHALL UTILIZE WYWA STANDARD C-8 CONCRETE PIER DETAIL.
 - CONTRACTOR SHALL CONNECT NEW WATER SERVICE LATERALS TO EXISTING SERVICE LATERAL AFTER CONTRACTOR GAINS APPROVAL FROM REQUIRED TESTING ON NEW WATERLINES (WORK TO BE COORDINATED WITH WYWA).
 - CONTRACTOR SHALL COORDINATE ALL WATER ABANDONMENT AND SUBSEQUENT WATER OUTAGES WITH WYWA INSPECTOR.
 - OUT OF SERVICE GATE VALVE BOXES & METER BOXES SHALL BE REMOVED A MINIMUM OF 1' BELOW GRADE & FILLED WITH STONE (WHEN IN THE ROADWAY) OR TOP SOIL (WHEN IN A YARD).
 - OUT OF SERVICE WATERLINES SHALL BE CAPPED ON BOTH ENDS.
 - SEE OTHER MISC. CONSTRUCTION NOTES ON PAGE 12.

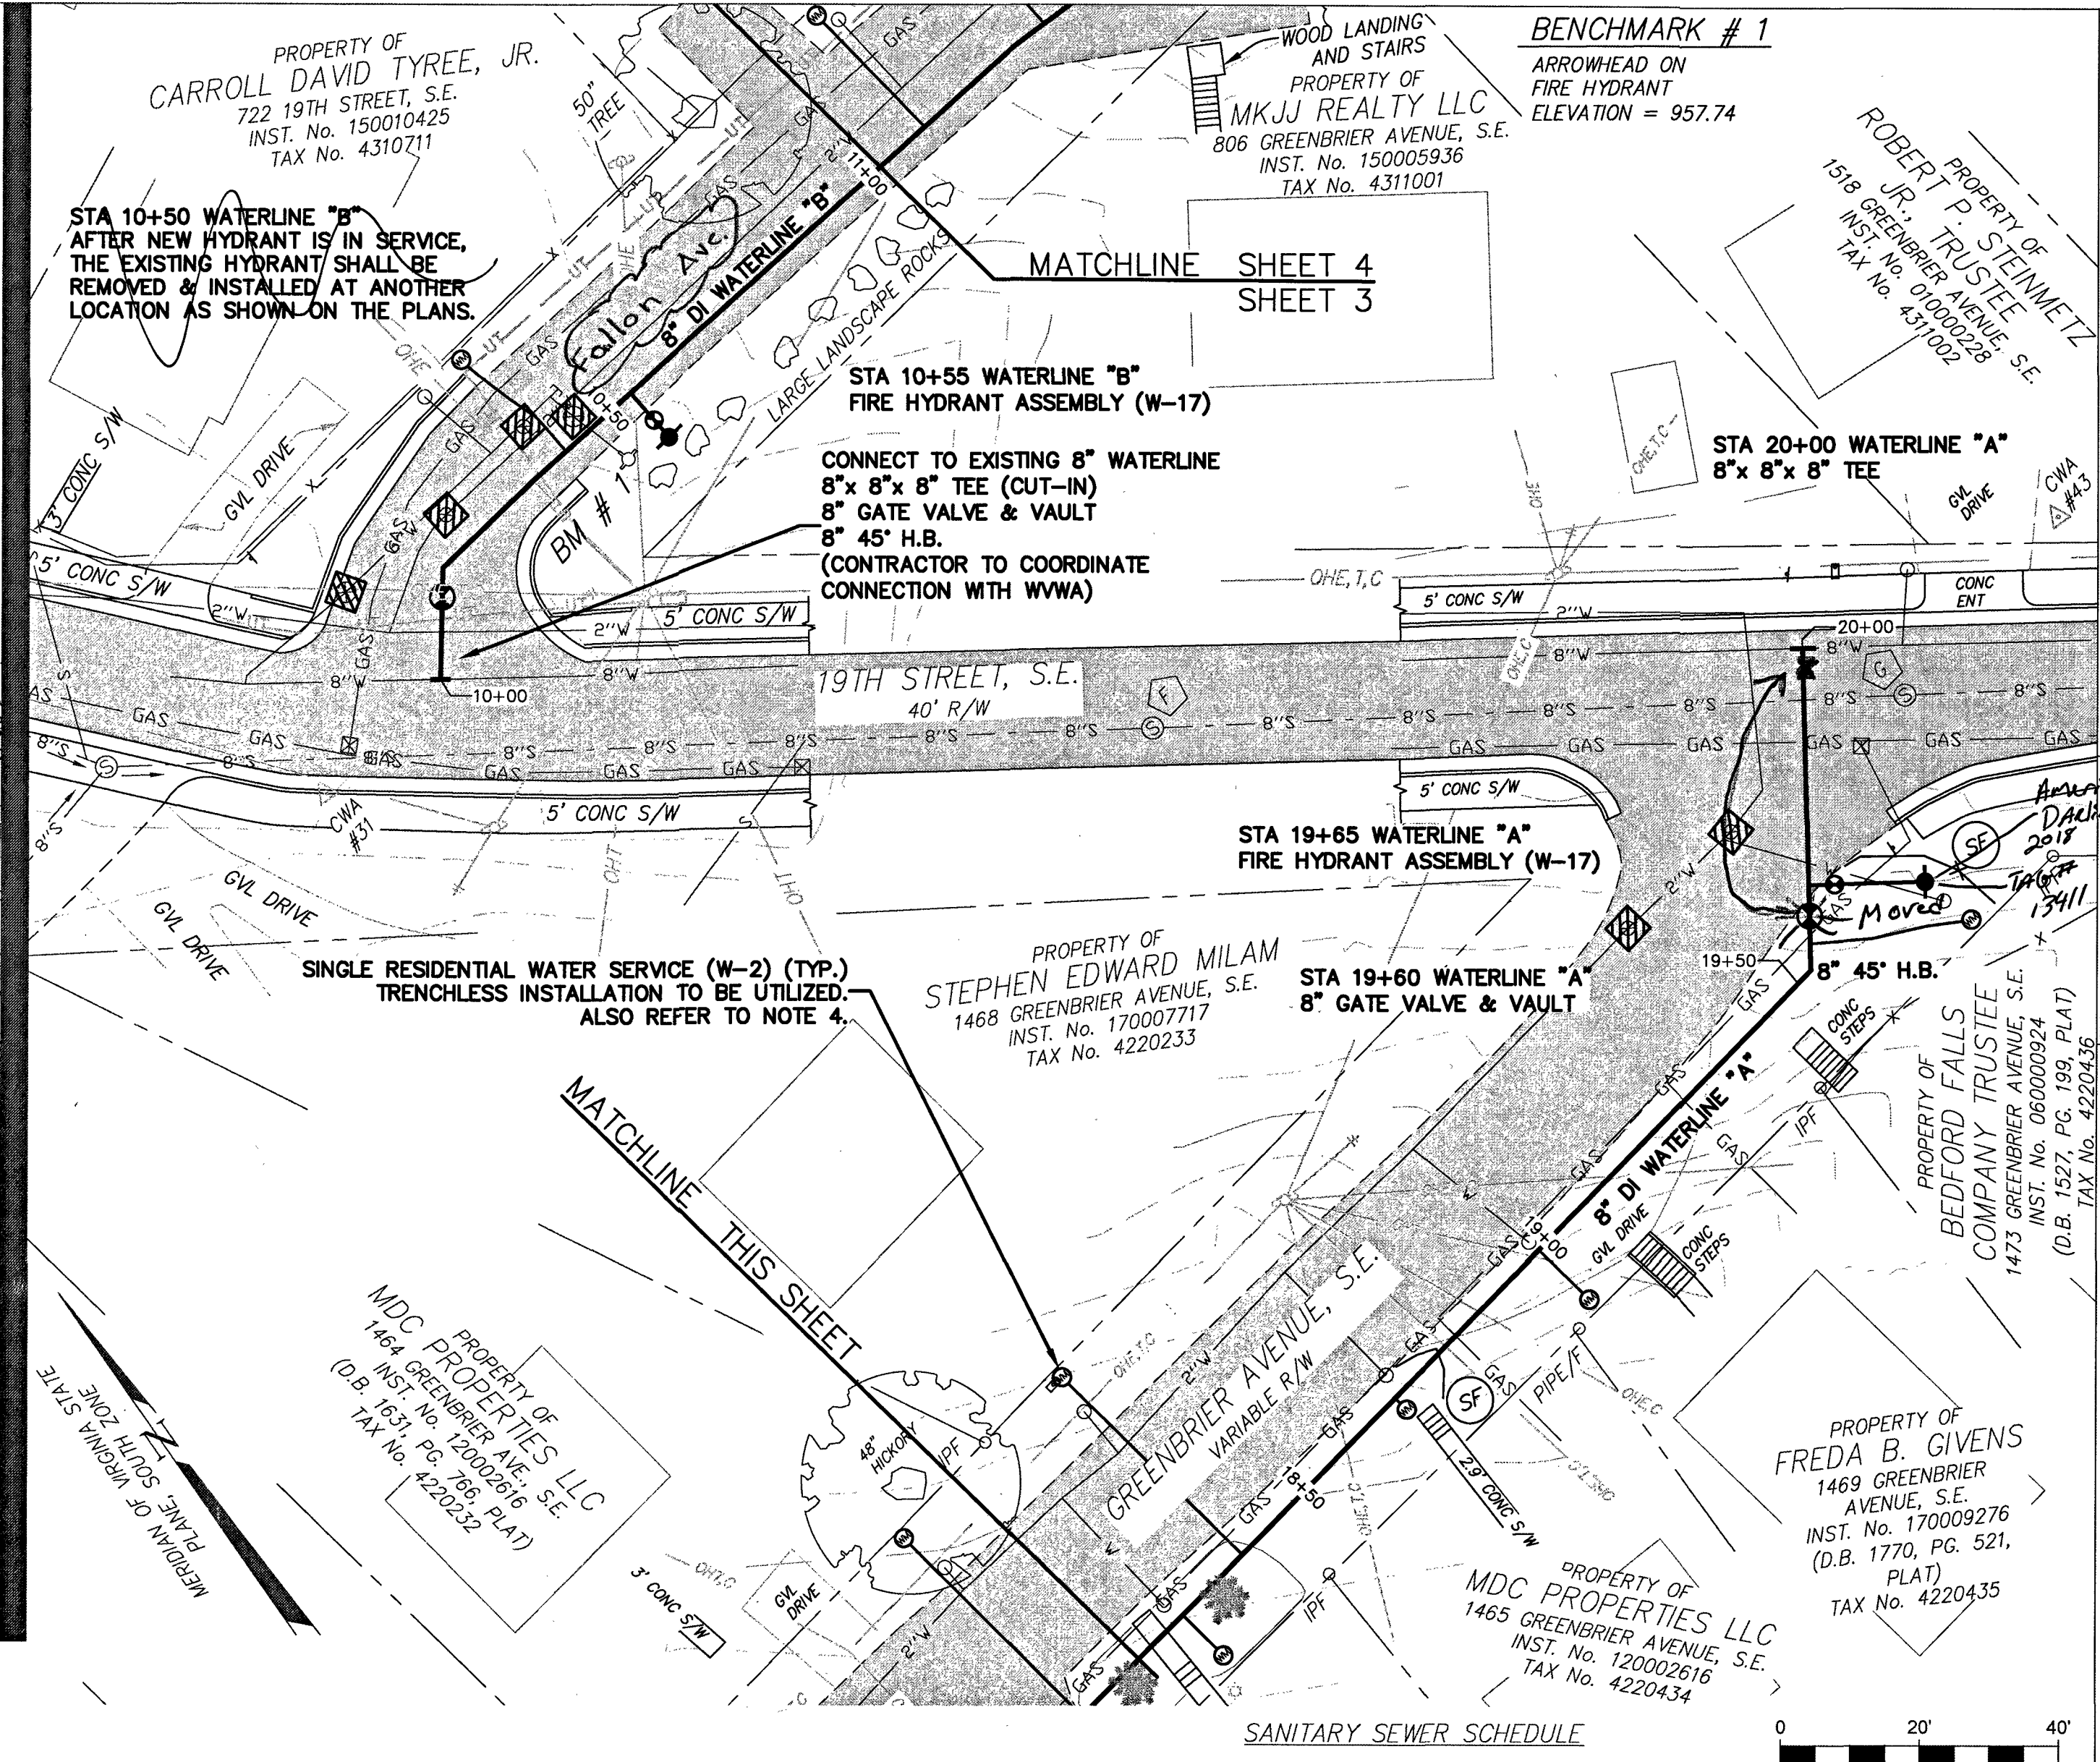

SANITARY SEWER SCHEDULE

F	SSMH 05A-3947.0
	RIM=949.46
	INV=943.86
G	SSMH 05A-3944.0
	RIM=947.47
	INV=941.77

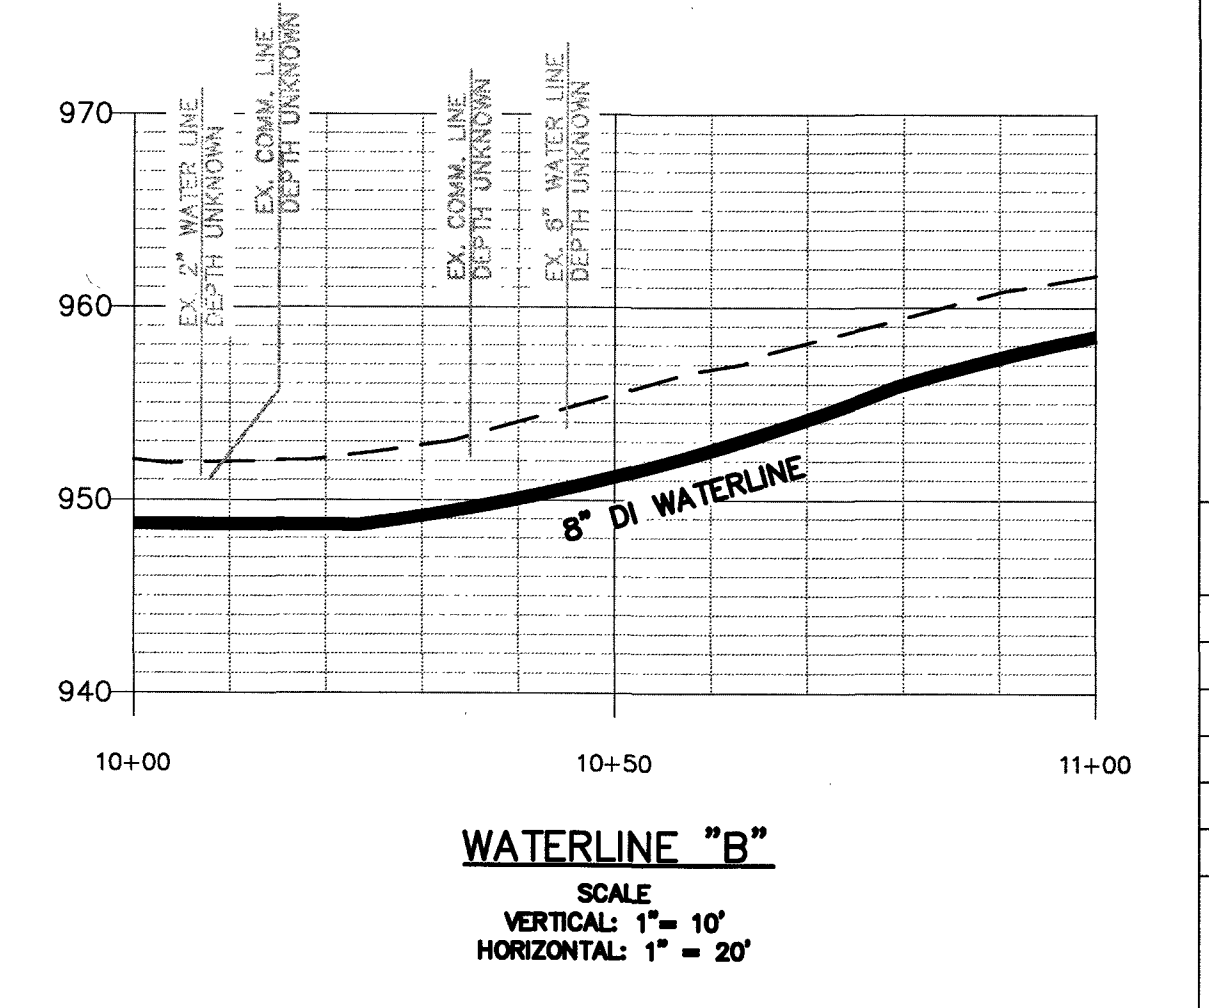

WESTERN VIRGINIA WATER AUTHORITY

ENGINEERING SERVICES

601 S JEFFERSON ST, SUITE 300
ROANOKE, VA 24011
540-853-5700

WATERLINE REPLACEMENT

PLAN & PROFILE

Rev	Description	Date	By

Designed: CDA

Drawn: DRJ

Checked: CDA

Approved: CDA

Date: 4/19/18

Project: CIP-250

3

Sheet 3 of 17