




PROPERTY OF  
DAVID LEE & SHELBY D. YOPP  
1315 17TH STREET, S.E.  
INSTRUMENT No. 010001582  
TAX No. 4320703


PROPERTY OF  
JERRY LEE COFFEY  
0 17TH STREET, S.E.  
D.B. 1457, PG. 1987  
TAX No. 4320705

PROPERTY OF  
JERRY LEE COFFEY  
0 17TH STREET, S.E.  
D.B. 1457, PG. 1987  
TAX No. 4320706

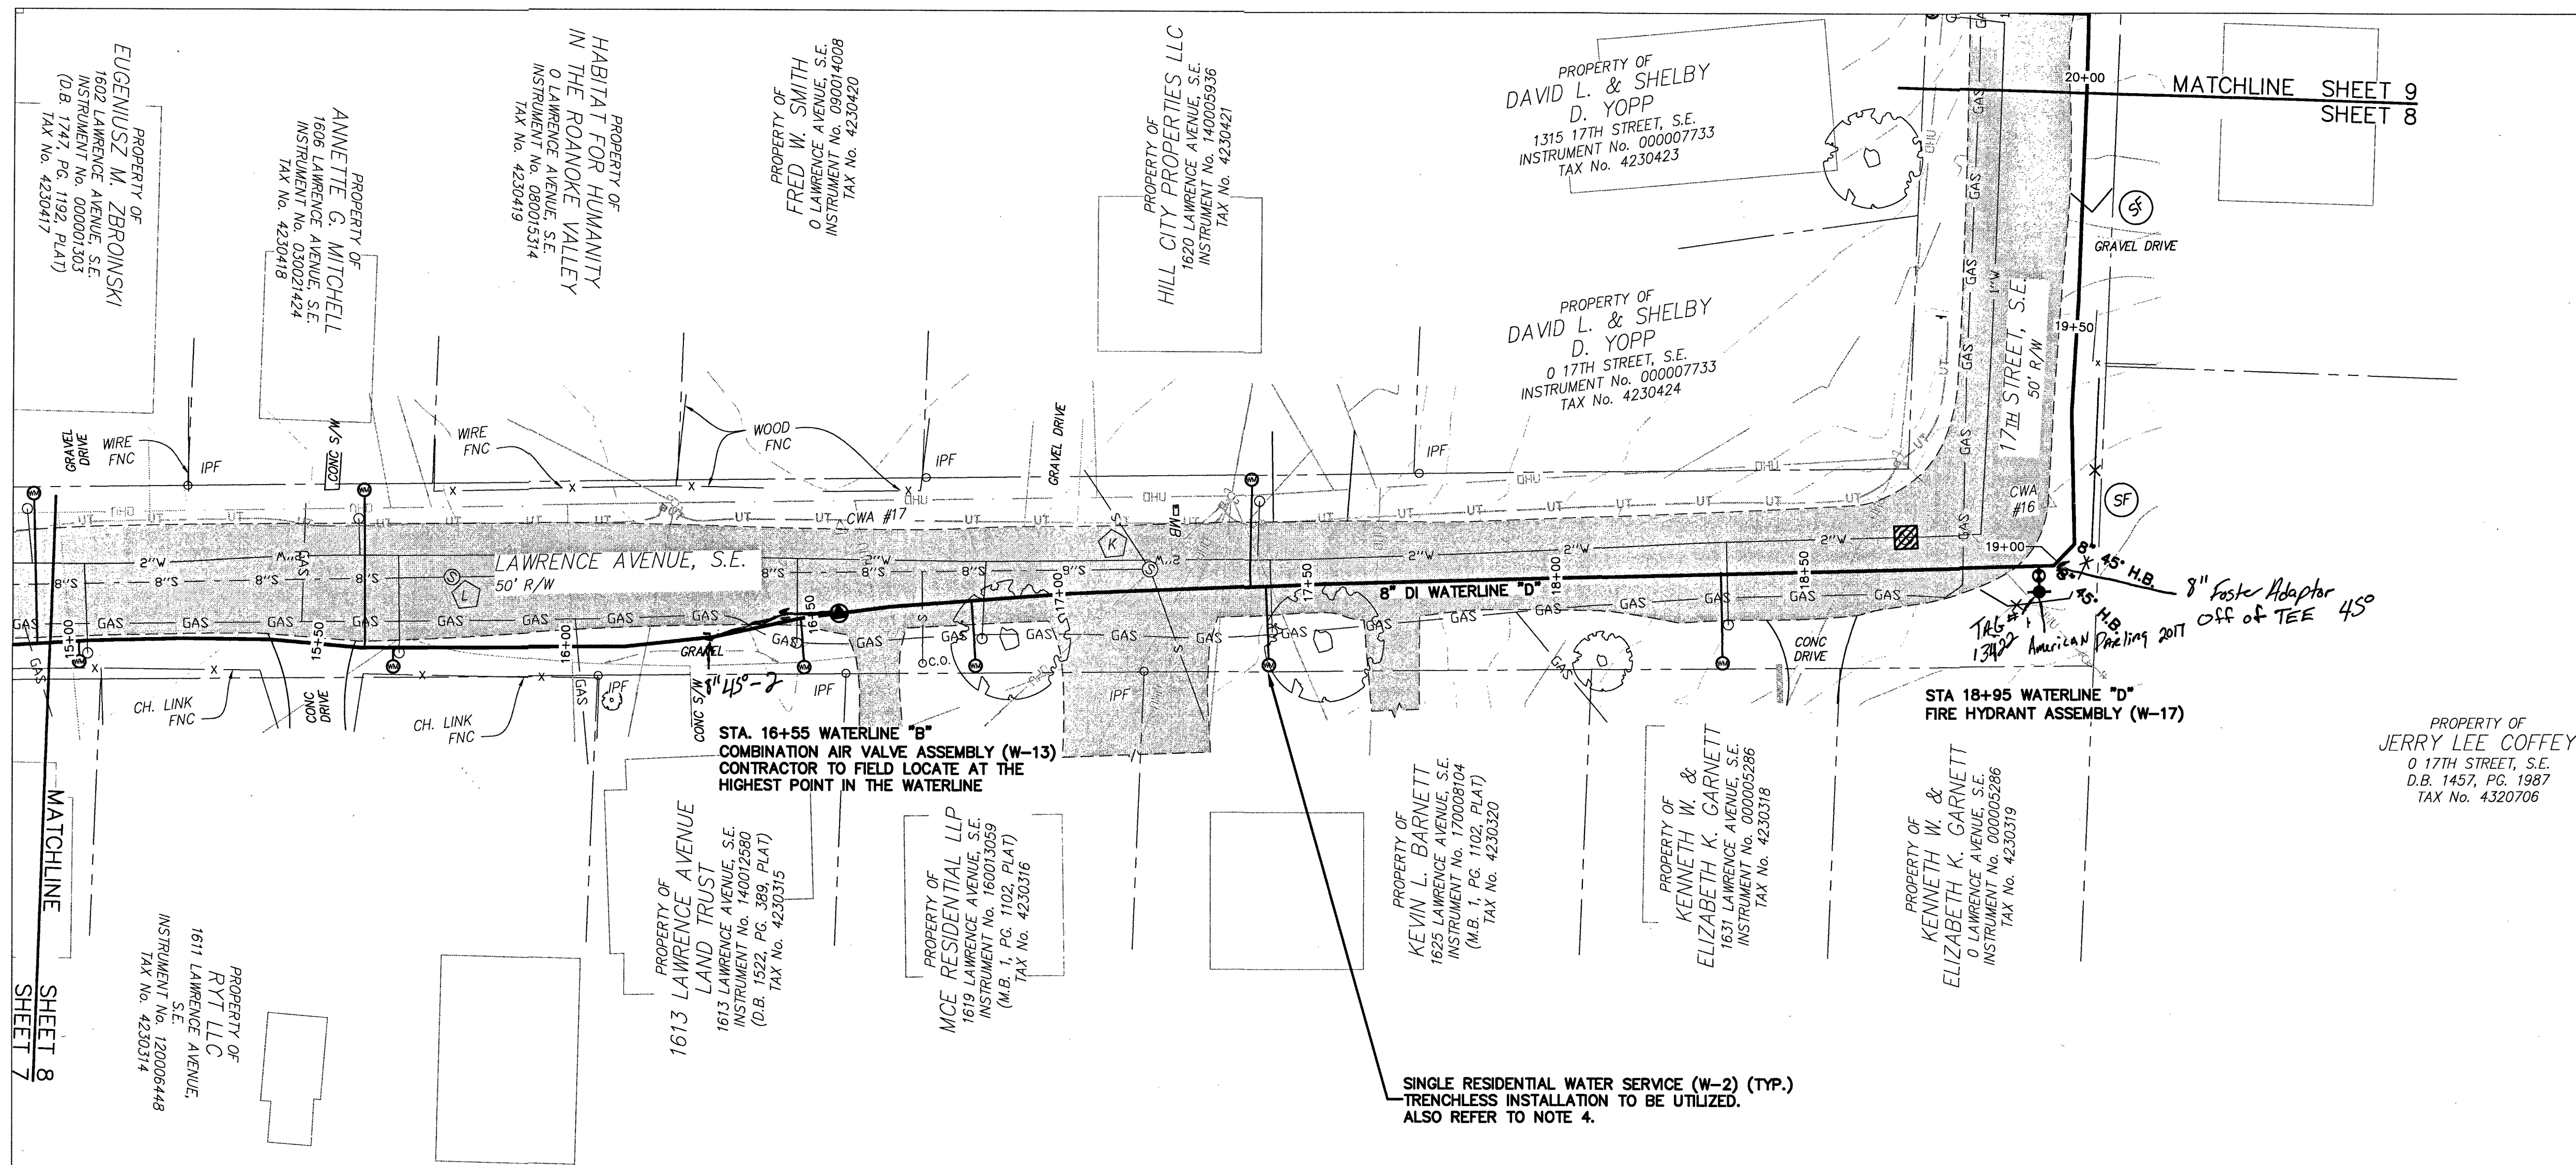

#### SANITARY SEWER SCHEDULE

- (K) SSMH 20A-3644.0  
 RIM=1000.73  
 FL=996.23  
 (L) SSMH 20A-3643.0  
 RIM=1000.37  
 8" FL=994.32

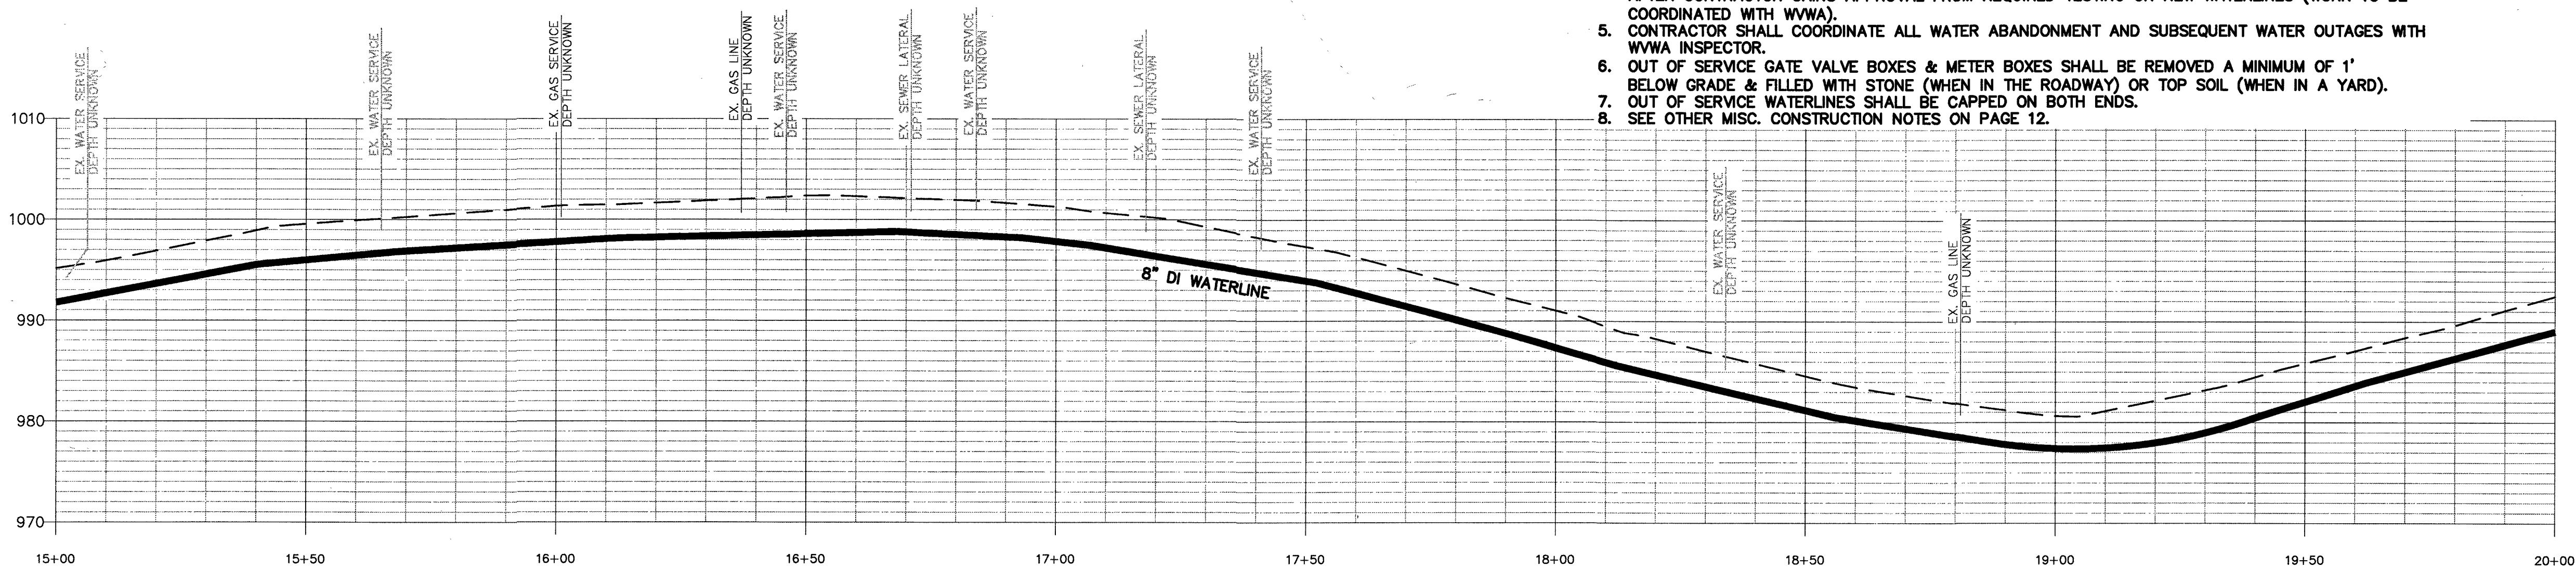

**WATERLINE "D"**  
 SCALE  
 VERTICAL: 1" = 10'  
 HORIZONTAL: 1" = 20'


#### GENERAL NOTES:

- SEWER LATERALS SHOWN ARE BASED ON CCTV FOOTAGE. ADDITIONAL LATERALS & CONFLICTS SHALL BE INVESTIGATED BY CONTRACTOR PRIOR TO EXCAVATION.

#### WATERLINE NOTES:

- ALL UTILITY CROSSINGS SHALL BE POTHOLED AHEAD OF CONSTRUCTION TO VERIFY CROSSING ELEVATIONS.
- MINIMUM COVER ON ALL WATERLINES SHALL BE 3' UNLESS OTHERWISE SPECIFIED.
- ALL UTILITY CROSSINGS SHALL HAVE 18" MIN. SEPARATION OR CONTRACTOR SHALL UTILIZE WYWA STANDARD G-8 CONCRETE PIER DETAIL.
- CONTRACTOR SHALL CONNECT NEW WATER SERVICE LATERALS TO EXISTING SERVICE LATERAL AFTER CONTRACTOR GAINS APPROVAL FROM REQUIRED TESTING ON NEW WATERLINES (WORK TO BE COORDINATED WITH WYWA).
- CONTRACTOR SHALL COORDINATE ALL WATER ABANDONMENT AND SUBSEQUENT WATER OUTAGES WITH WYWA INSPECTOR.
- OUT OF SERVICE GATE VALVE BOXES & METER BOXES SHALL BE REMOVED A MINIMUM OF 1' BELOW GRADE & FILLED WITH STONE (WHEN IN THE ROADWAY) OR TOP SOIL (WHEN IN A YARD).
- OUT OF SERVICE WATERLINES SHALL BE CAPPED ON BOTH ENDS.
- SEE OTHER MISC. CONSTRUCTION NOTES ON PAGE 12.

WESTERN VIRGINIA  
**WATER AUTHORITY**  
 ENGINEERING SERVICES  
 601 S JEFFERSON ST, SUITE 300  
 ROANOKE, VA 24011  
 540-853-5700

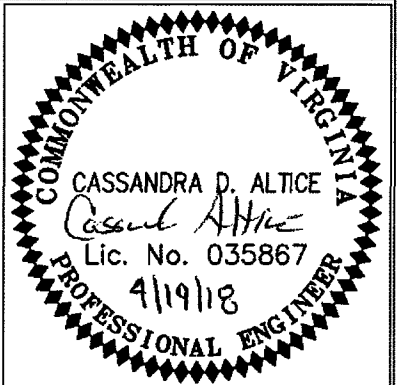

WAVERLY NEIGHBORHOOD AREA  
 WATERLINE REPLACEMENT

PLAN & PROFILE

| Rev | Description | Date | By |
|-----|-------------|------|----|
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |

Designed: DRJ, CDA  
 Drawn: DRJ  
 Checked: CDA  
 Approved: CDA  
 Date: 4/19/18  
 Project: CIP-250