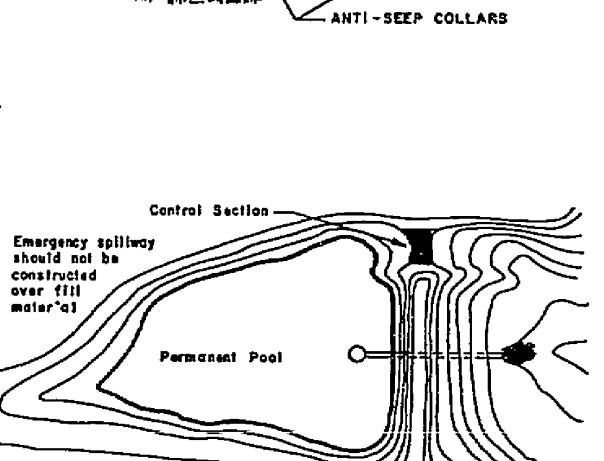

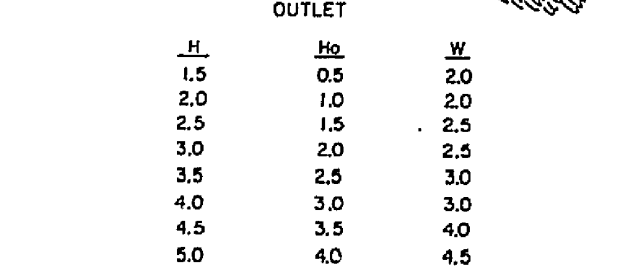
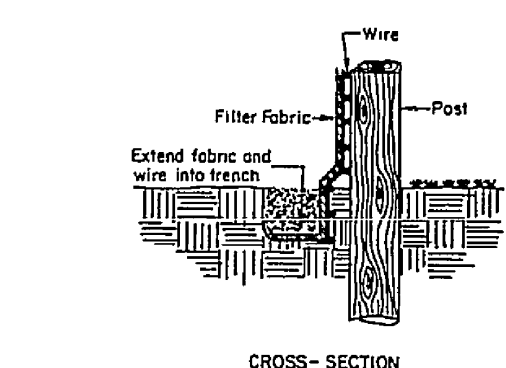
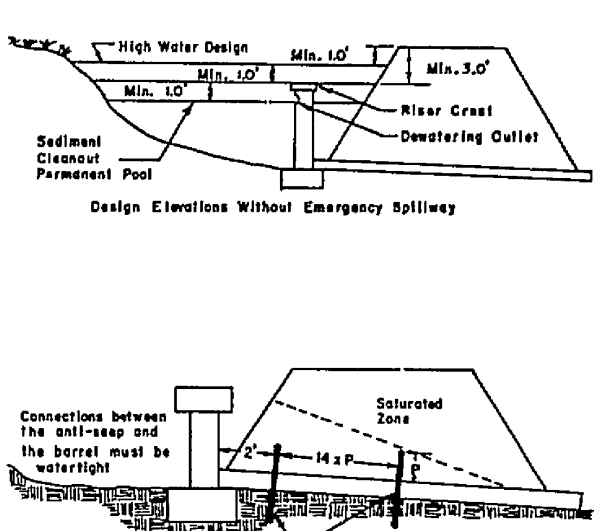
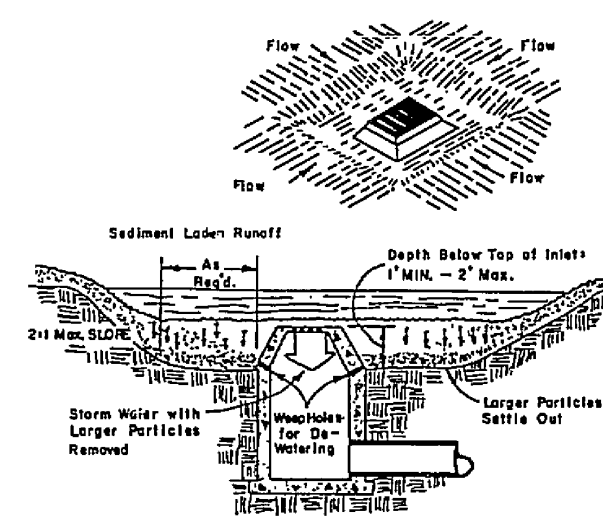
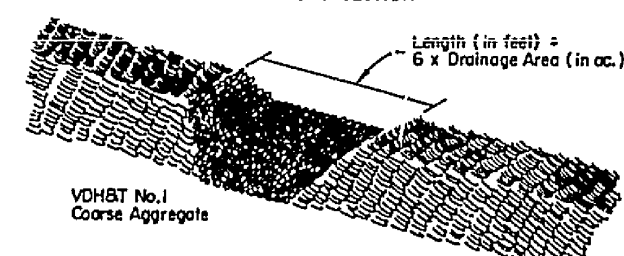
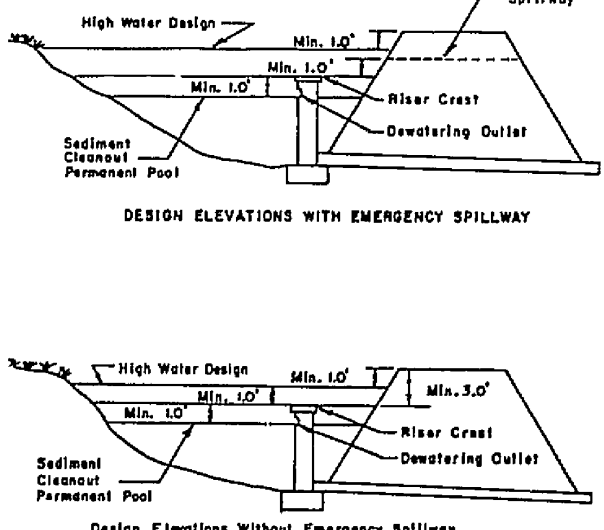
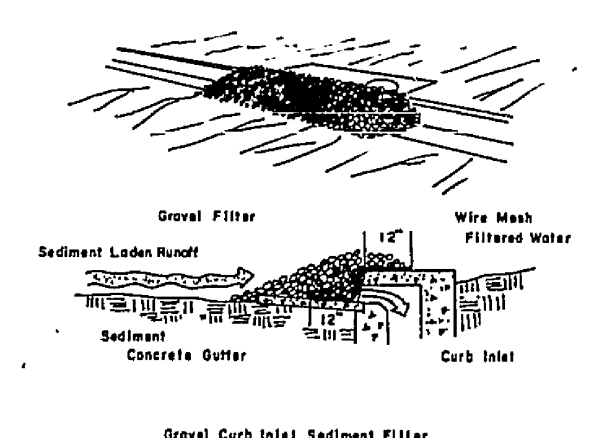
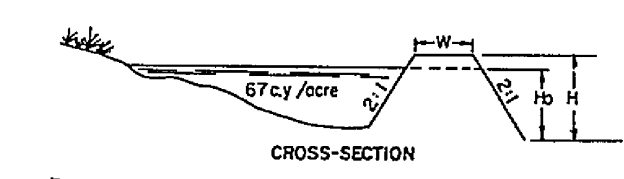
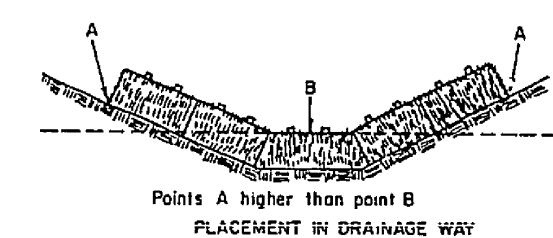
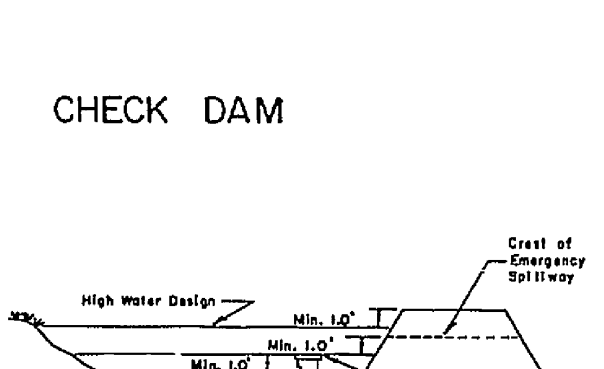
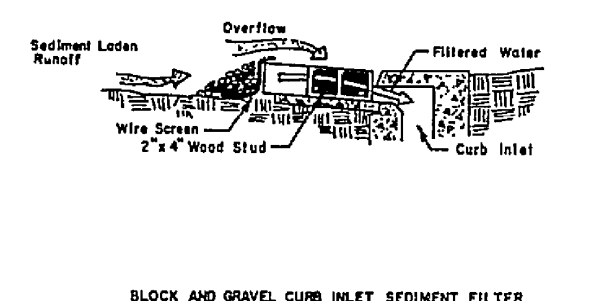
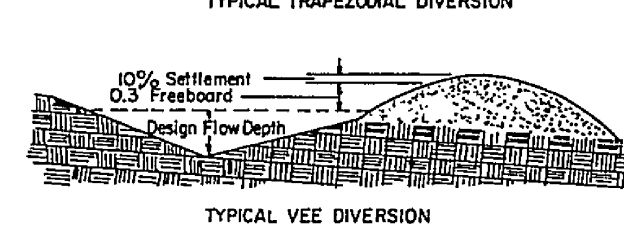
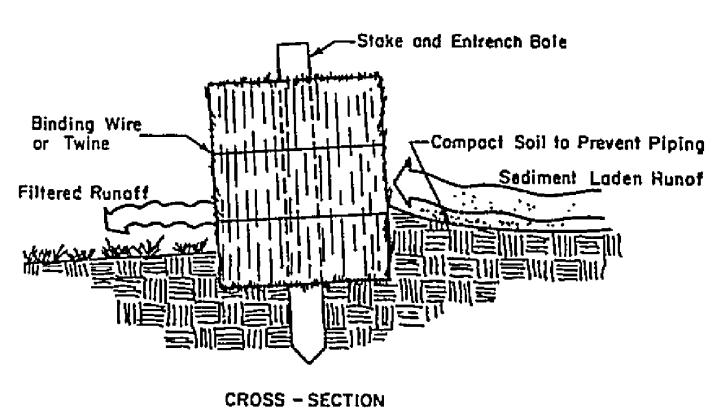
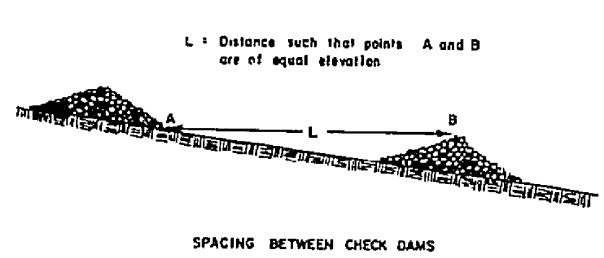
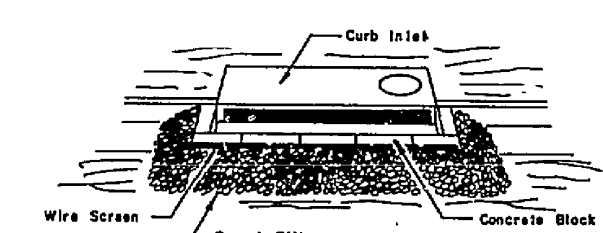
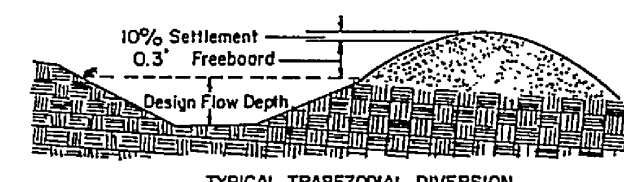
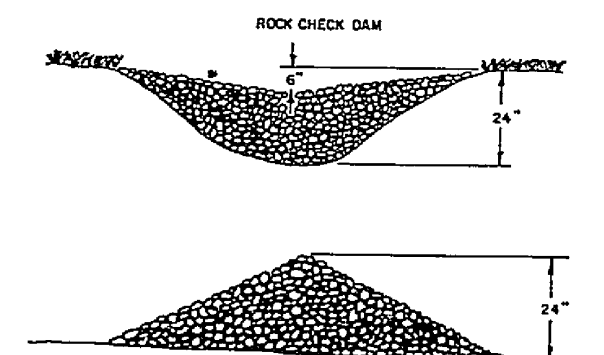
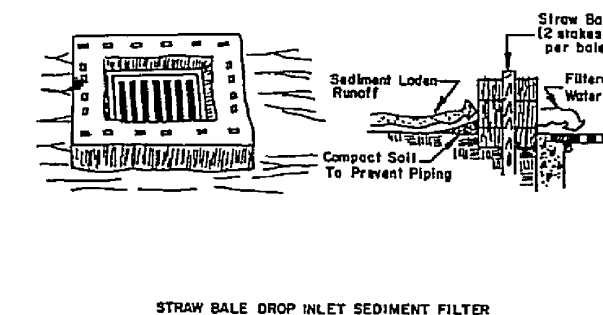
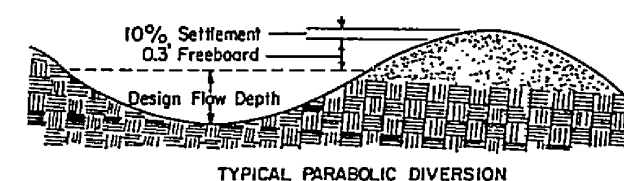
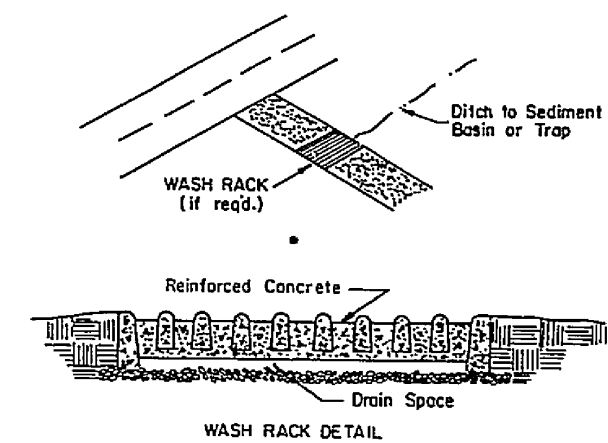
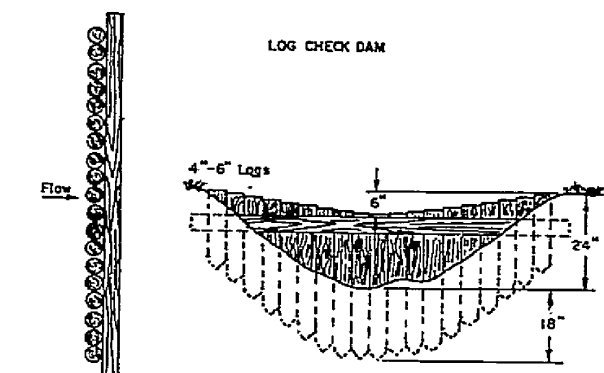
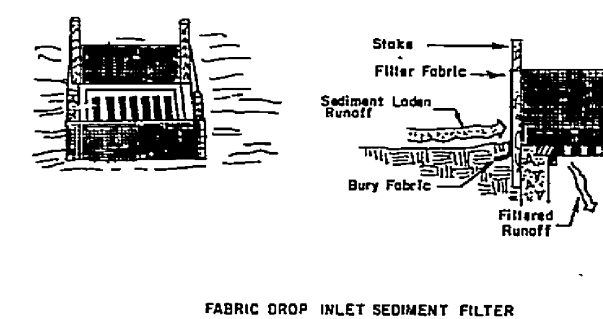
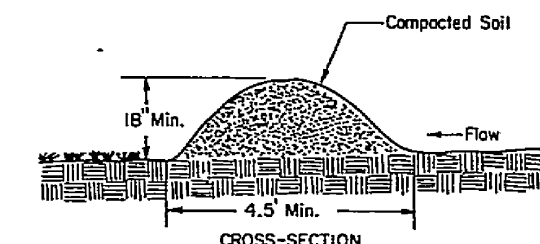
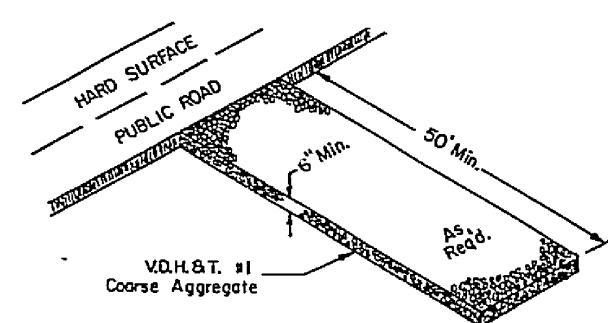


EROSION-SILTATION CONTROL COST ESTIMATE				
ALL COSTS GIVEN ARE COMPLETE IN PLACE				
DESCRIPTION	UNIT	QUANTITY	UNIT COST	TOTAL COST
DIVERSION DIKE	L.F.			
STRAW BALE BARRIER	L.F.			
CRUSHED STONE	TON			
SOD	S.Y.			
SEEDING OPERATION	1000 S.F.			
TEMP. SEDIMENT BASIN	JOB			
TEMP. GRAVEL CONSTRUCTION ENT.	EACH	1	500.00	500.00
SILT FENCE	L.F.	1000	3.00	3,000.00
STORM DRAIN INLET PROTECTION	EACH	5	200.00	1,000.00
TOTAL PROJECT COST				4,500.00

GENERAL NOTES

1. ALL EROSION & SEDIMENT CONTROL PRACTICES & PROCEDURES SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE VIRGINIA EROSION & SEDIMENT CONTROL HANDBOOK.
2. OWNER/DEVELOPER GRANTS RIGHT OF ENTRY TO COUNTY PERSONNEL FOR THE PURPOSE OF MONITORING COMPLIANCE WITH THE CODE OF VIRGINIA EROSION & SEDIMENT CONTROL LAW (TITLE 28, CHAPTER 1, ARTICLE 6).
3. BUILDING PERMITS WILL NOT BE ISSUED UNTIL EROSION & SEDIMENT CONTROL MEASURES REFLECTED IN THE APPROVED PLANS HAVE BEEN PROPERLY INSTALLED.
4. EROSION & SEDIMENT CONTROL MEASURES SHALL BE INSPECTED AFTER EACH RAINFALL, AND DAILY AFTER PROLONGED RAINFALL.
5. ALL SITUATION CONTROLS SHALL BE IN PLACE PRIOR TO CLEARING, STRIPPING OF TOPSOIL, OR GRADING.
6. ALL DETAILS ARE FROM THE VIRGINIA EROSION & SEDIMENT CONTROL HANDBOOK.

TEMPORARY SEDIMENT TRAP DATA

[illegible]

County of Boone

EROSION & SILTATION CONTROL DETAILS

PLAN NAME: "WINDERMERE"	
OWNER: JAMES H. BUCKLAND & VIRGINIA H. BUCKLAND	
DEVELOPER: SAME	
ENGINEER: BUFORD T. LUMSDEN & ASSOCIATES, PC.	
MAGISTERIAL DISTRICT:	
TAX MAP NO.: 76.20	SECTION NO.: 5
TOTAL AREA: 9.5 AC. ±	
DATE: 1 APRIL 1988	