

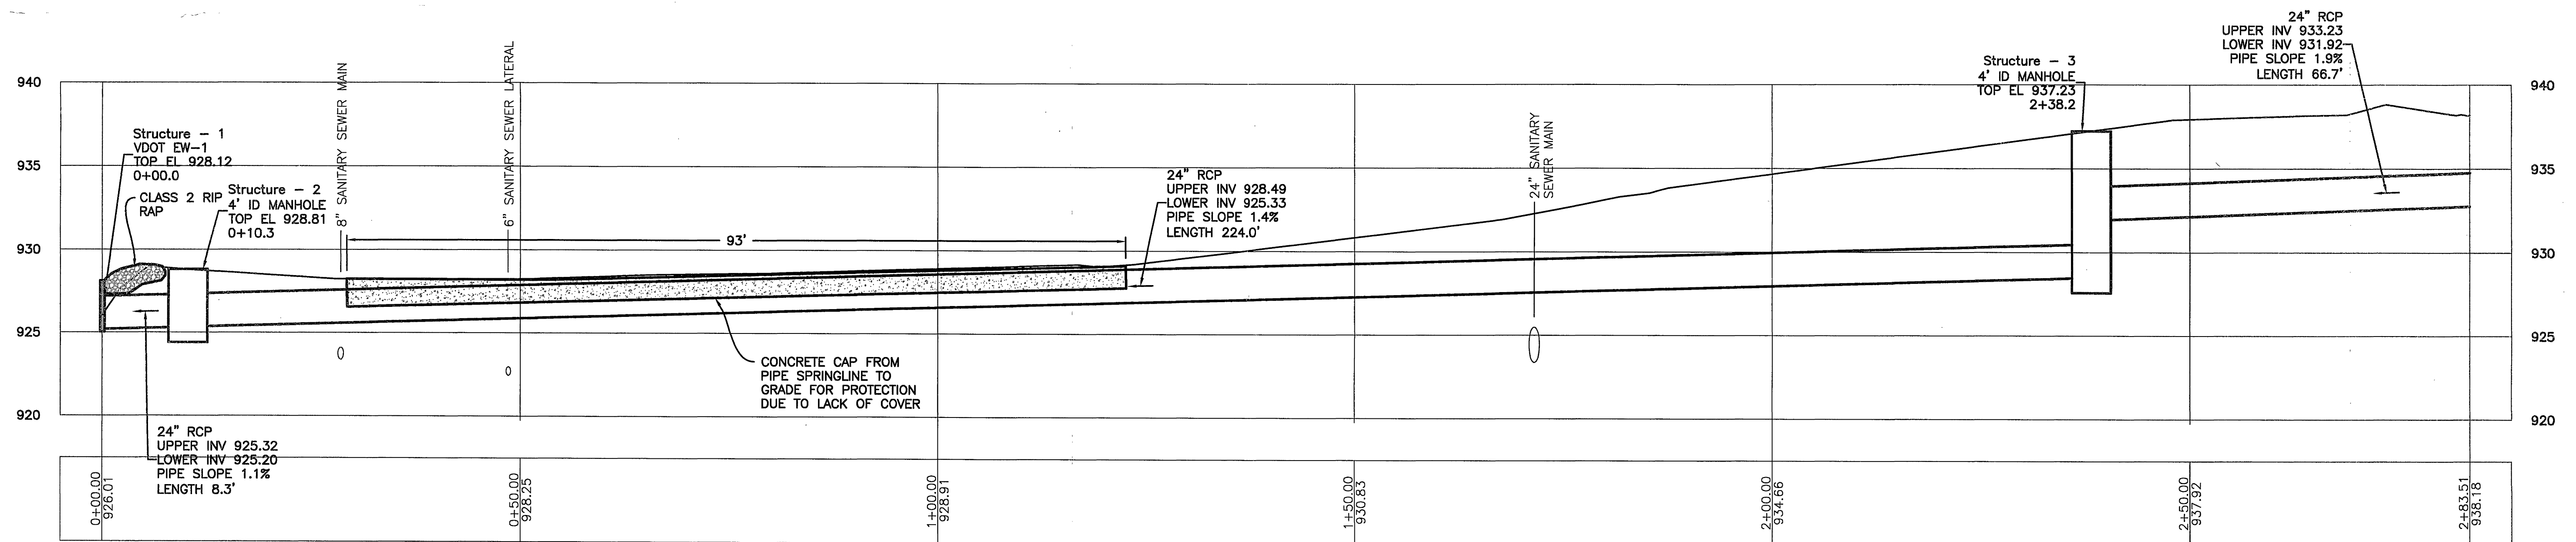


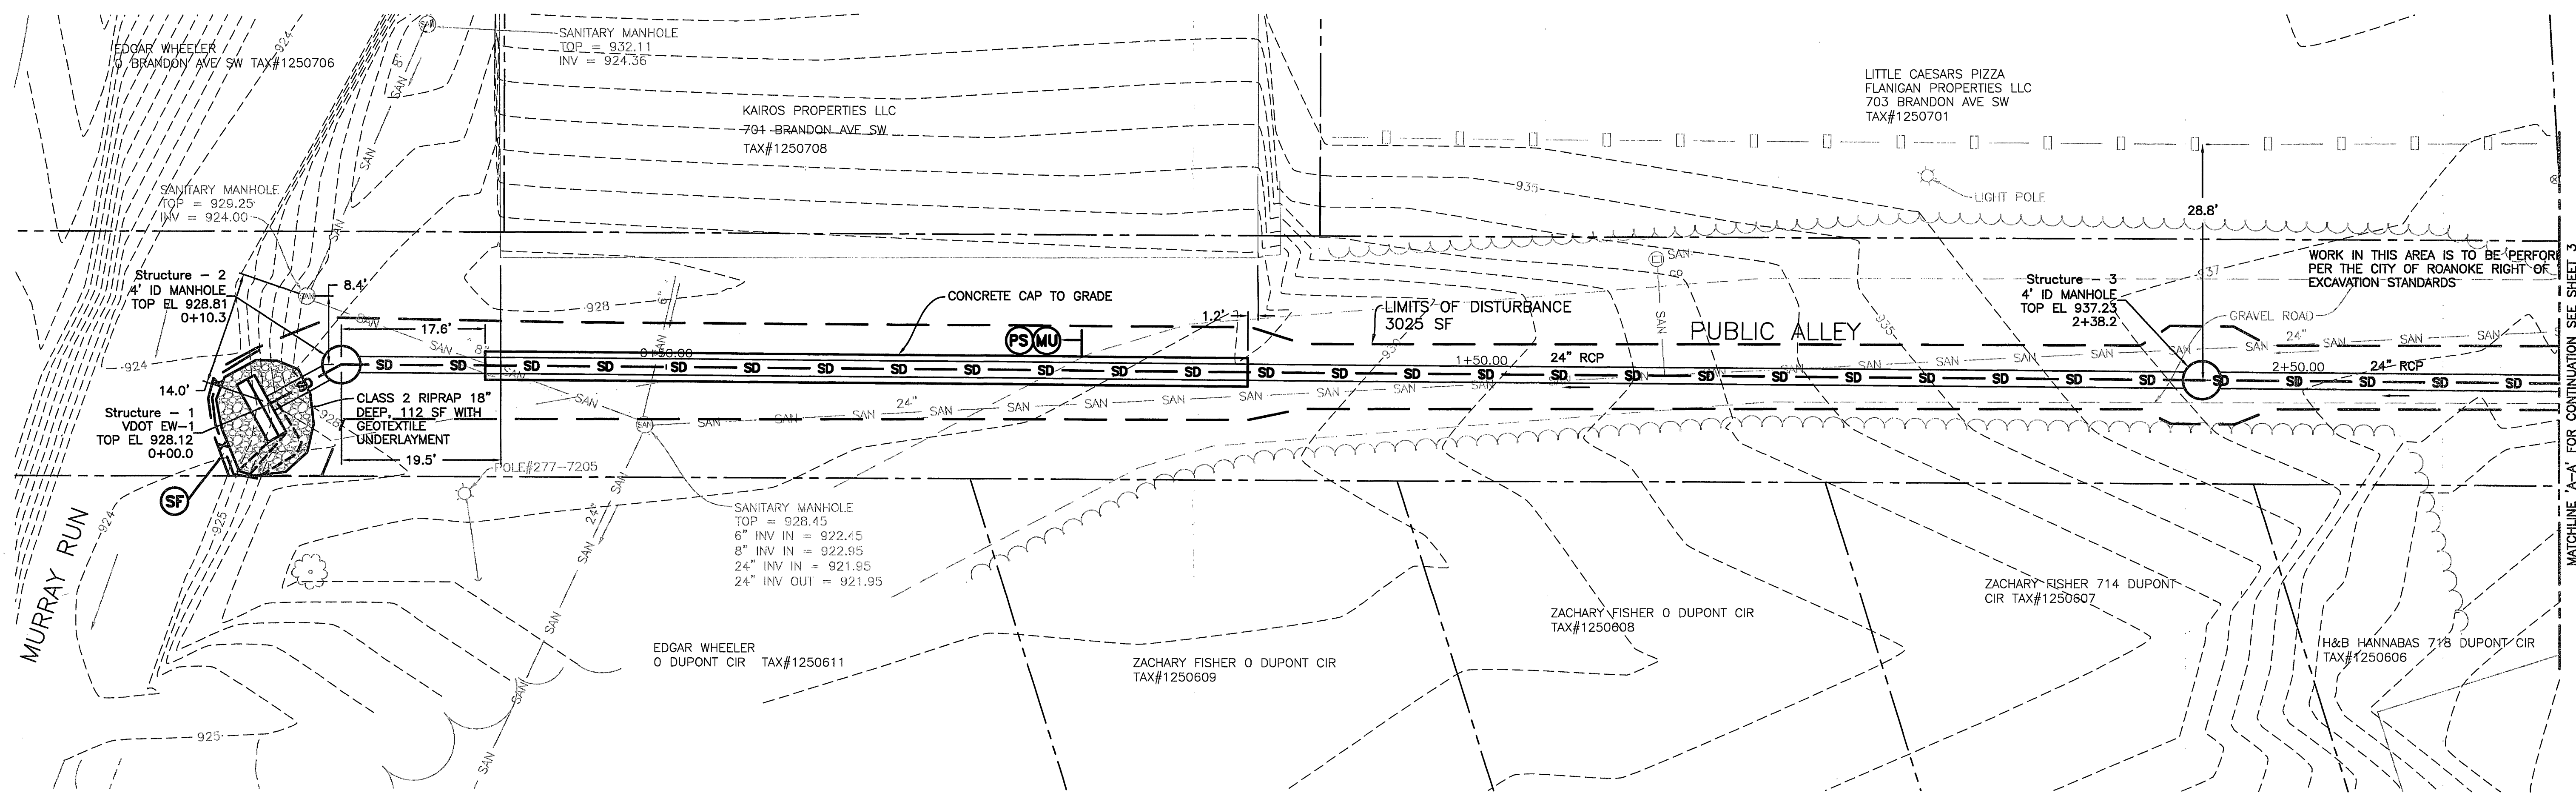


NOTES:

1. CONTRACTOR SHALL POTHOLE, LOCATE, AND ADJUST/RELOCATE ALL UTILITIES THROUGHOUT PROJECT AREA PRIOR TO STORM SYSTEM CONSTRUCTION.
2. ALL WATER RELOCATIONS SHALL BE DUCTILE IRON WITH A MIN. OF 1' OF COVER AND A MIN. OF 6" CLEARANCE FROM OTHER UTILITIES. IT IS PREFERABLE THAT THE WATER PIPE BE RELOCATED OVER THE STORM PIPE IF POSSIBLE.
3. PROVIDE NEW RUBBER BOOT CONNECTION FOR NEW SANITARY LATERALS AND CORE DRILL IF NECESSARY.
4. NOTIFY CITY OF ROANOKE DEPUTY FIRE MARSHALL RONNIE CAMPBELL 540-853-6544 IF ANY FIRE HYDRANT WILL BE TEMPORARILY OUT OF SERVICE.
5. EXCAVATIONS FOR CURB CONSTRUCTION SHALL BE STABILIZED WITH COMPACTED BASE STONE IMMEDIATELY TO PREVENT EROSION AND PROTECT SUBGRADE.

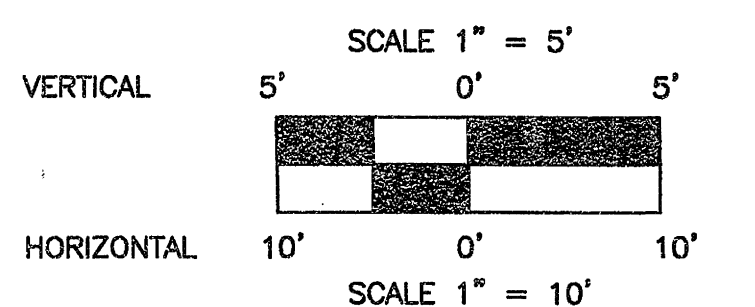

OFFICE OF THE
CITY ENGINEER
215 CHURCH AVENUE, S.W.
ROOM 350
PHONE: (540) 853-2731
FAX: (540) 853-1364
WWW.ROANOKEVA.GOV

DESIGNED:
ARG
DRAWN:
ARG
CHECKED:
LEP

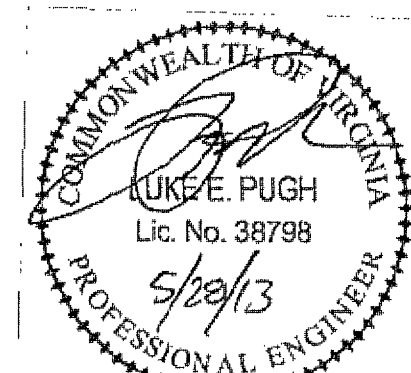

REV.	DATE:	DESCRIPTION

DATE:
04/22/2013
SCALE:
1"=10'-0"
24"x36" SHEET

WINDSOR AVE SW DRAINAGE
IMPROVEMENTS PROJECT
CITY OF ROANOKE, VIRGINIA

APPROVED
AUG 06 2013

SHEET
3 OF 7
PLAN NO.
3