



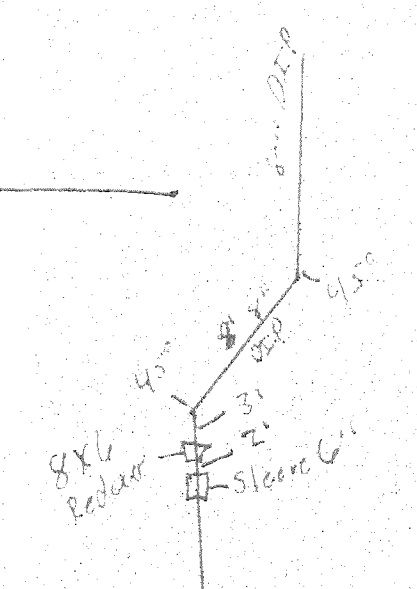

H.P = high pressure
L.P = Lower pressure

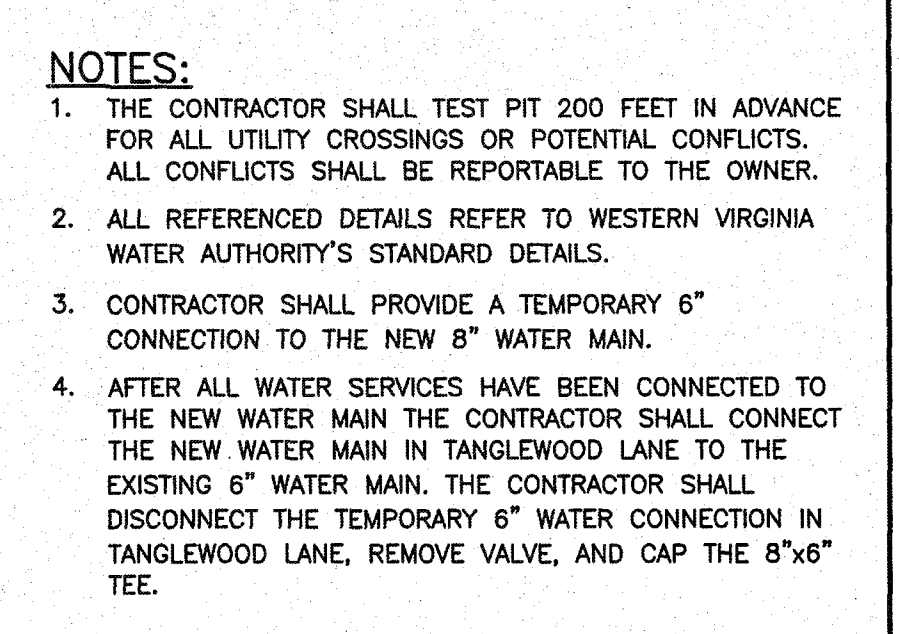

1. THE CONTRACTOR SHALL TEST PIT 200 FEET IN ADVANCE FOR ALL UTILITY CROSSINGS OR POTENTIAL CONFLICTS. ALL CONFLICTS SHALL BE REPORTABLE TO THE OWNER.
2. ALL REFERENCED DETAILS REFER TO WESTERN VIRGINIA WATER AUTHORITY'S STANDARD DETAILS.
3. CONTRACTOR SHALL PROVIDE A TEMPORARY 6" CONNECTION TO THE NEW 8" WATER MAIN.
4. AFTER ALL WATER SERVICES HAVE BEEN CONNECTED TO THE NEW WATER MAIN THE CONTRACTOR SHALL CONNECT THE NEW WATER MAIN IN TANGLEWOOD LANE TO THE EXISTING 6" WATER MAIN. THE CONTRACTOR SHALL DISCONNECT THE TEMPORARY 6" WATER CONNECTION IN TANGLEWOOD LANE, REMOVE VALVE, AND CAP THE 8"x6" TEE.

PROJECT NO.: 05170.01	
DWG	C3
SHEET 8	OF 13
DATE FEBRUARY 2019	REV 0