
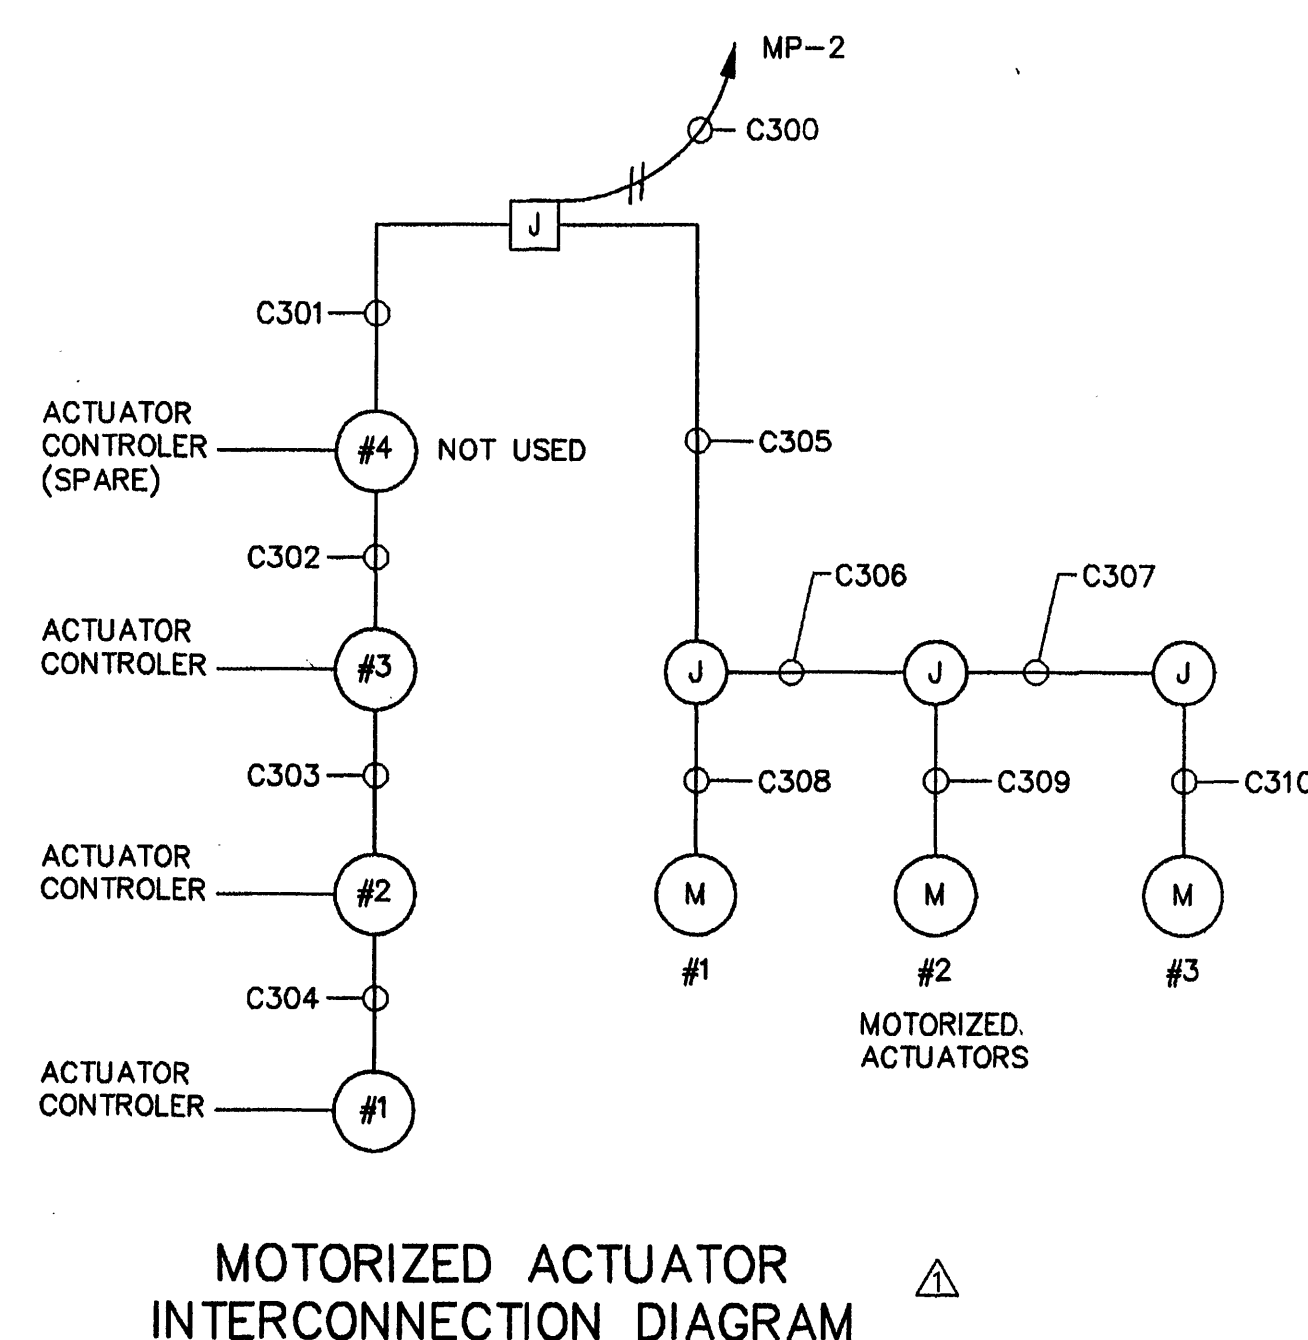
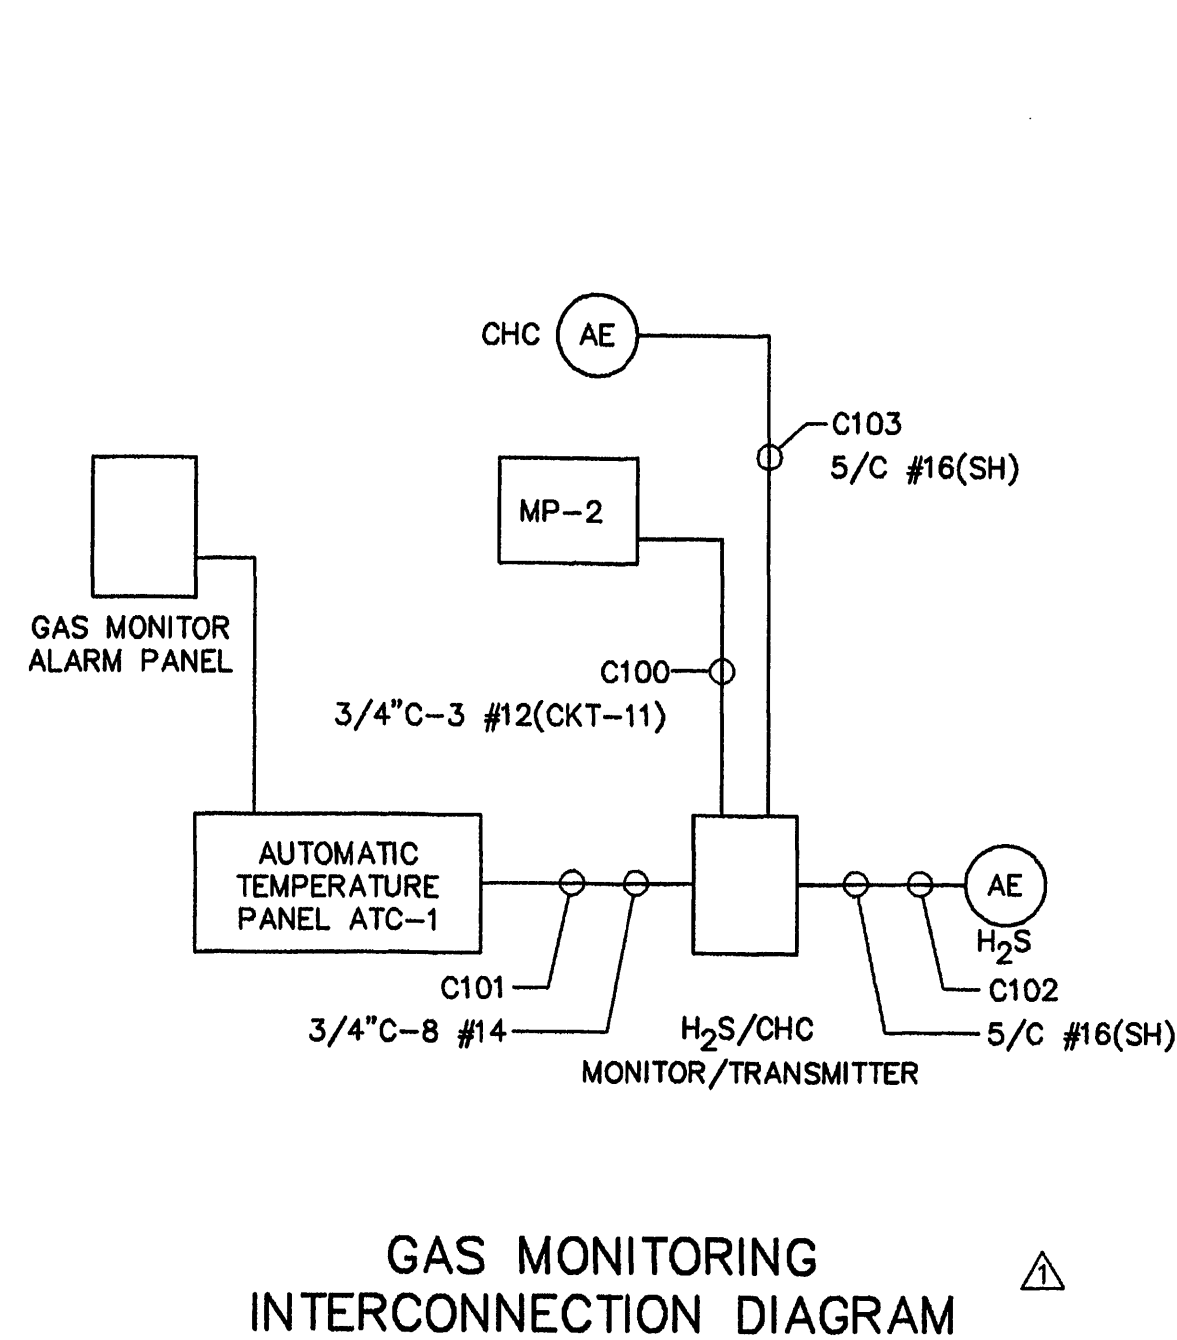
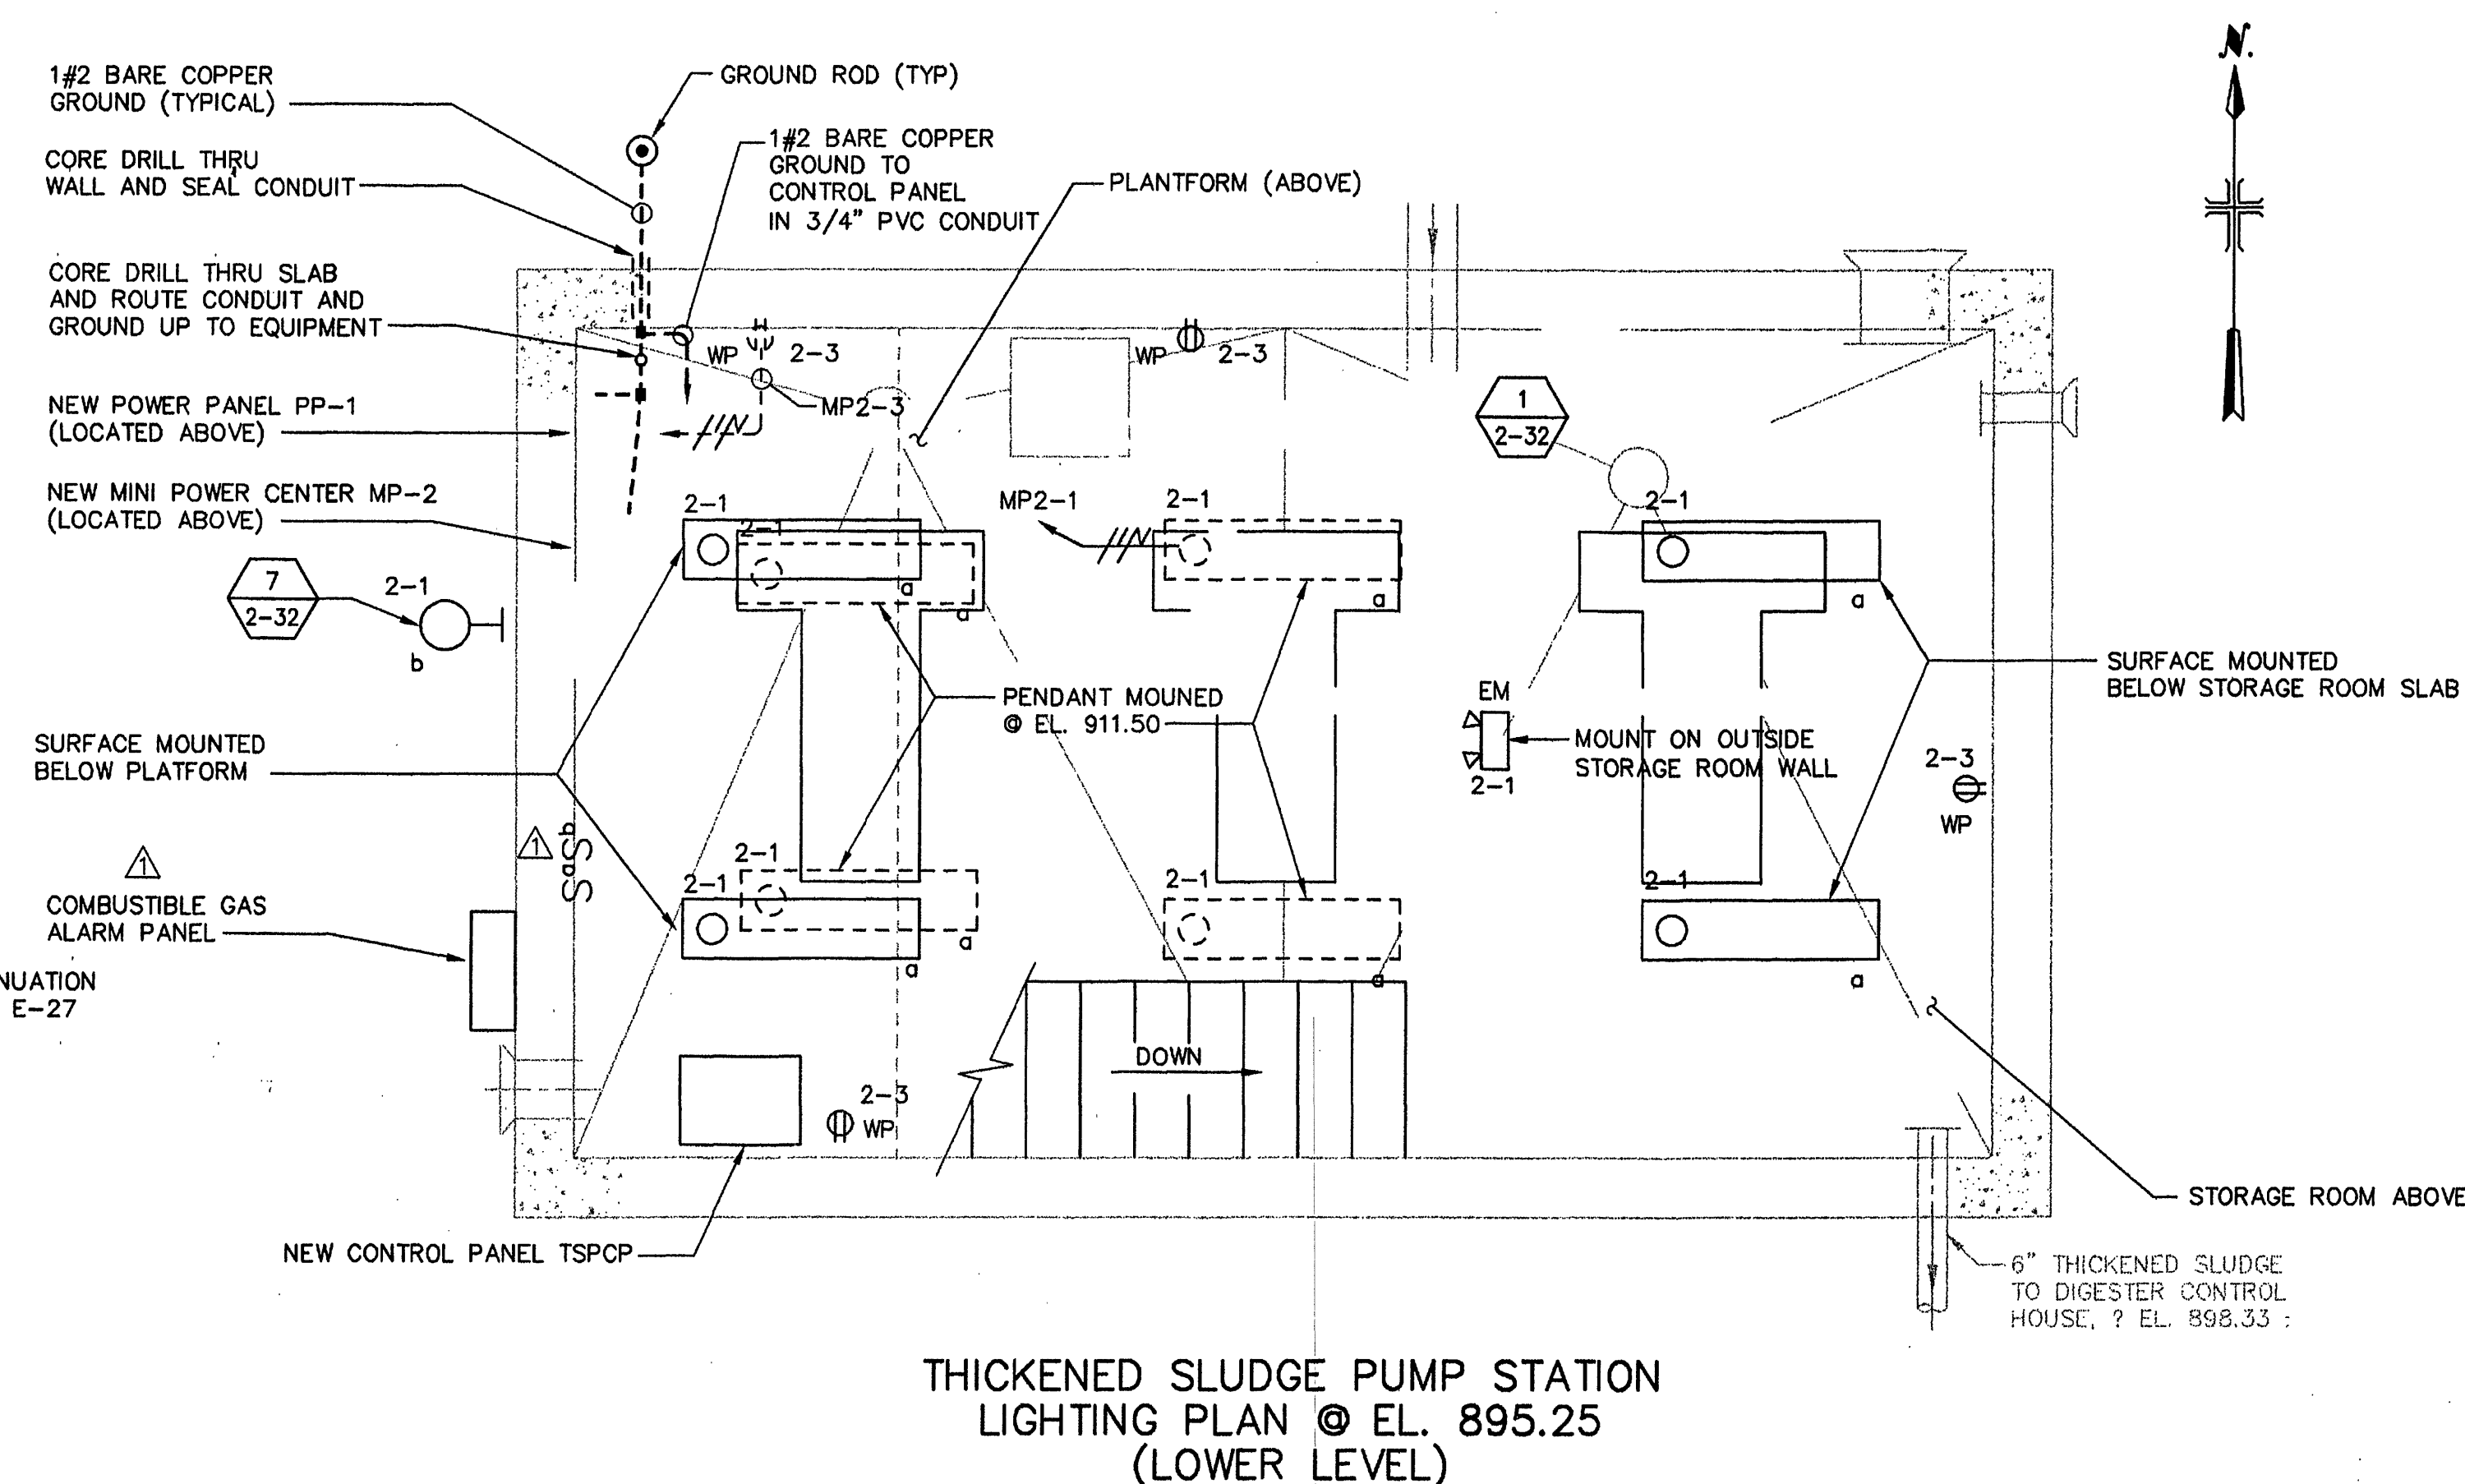


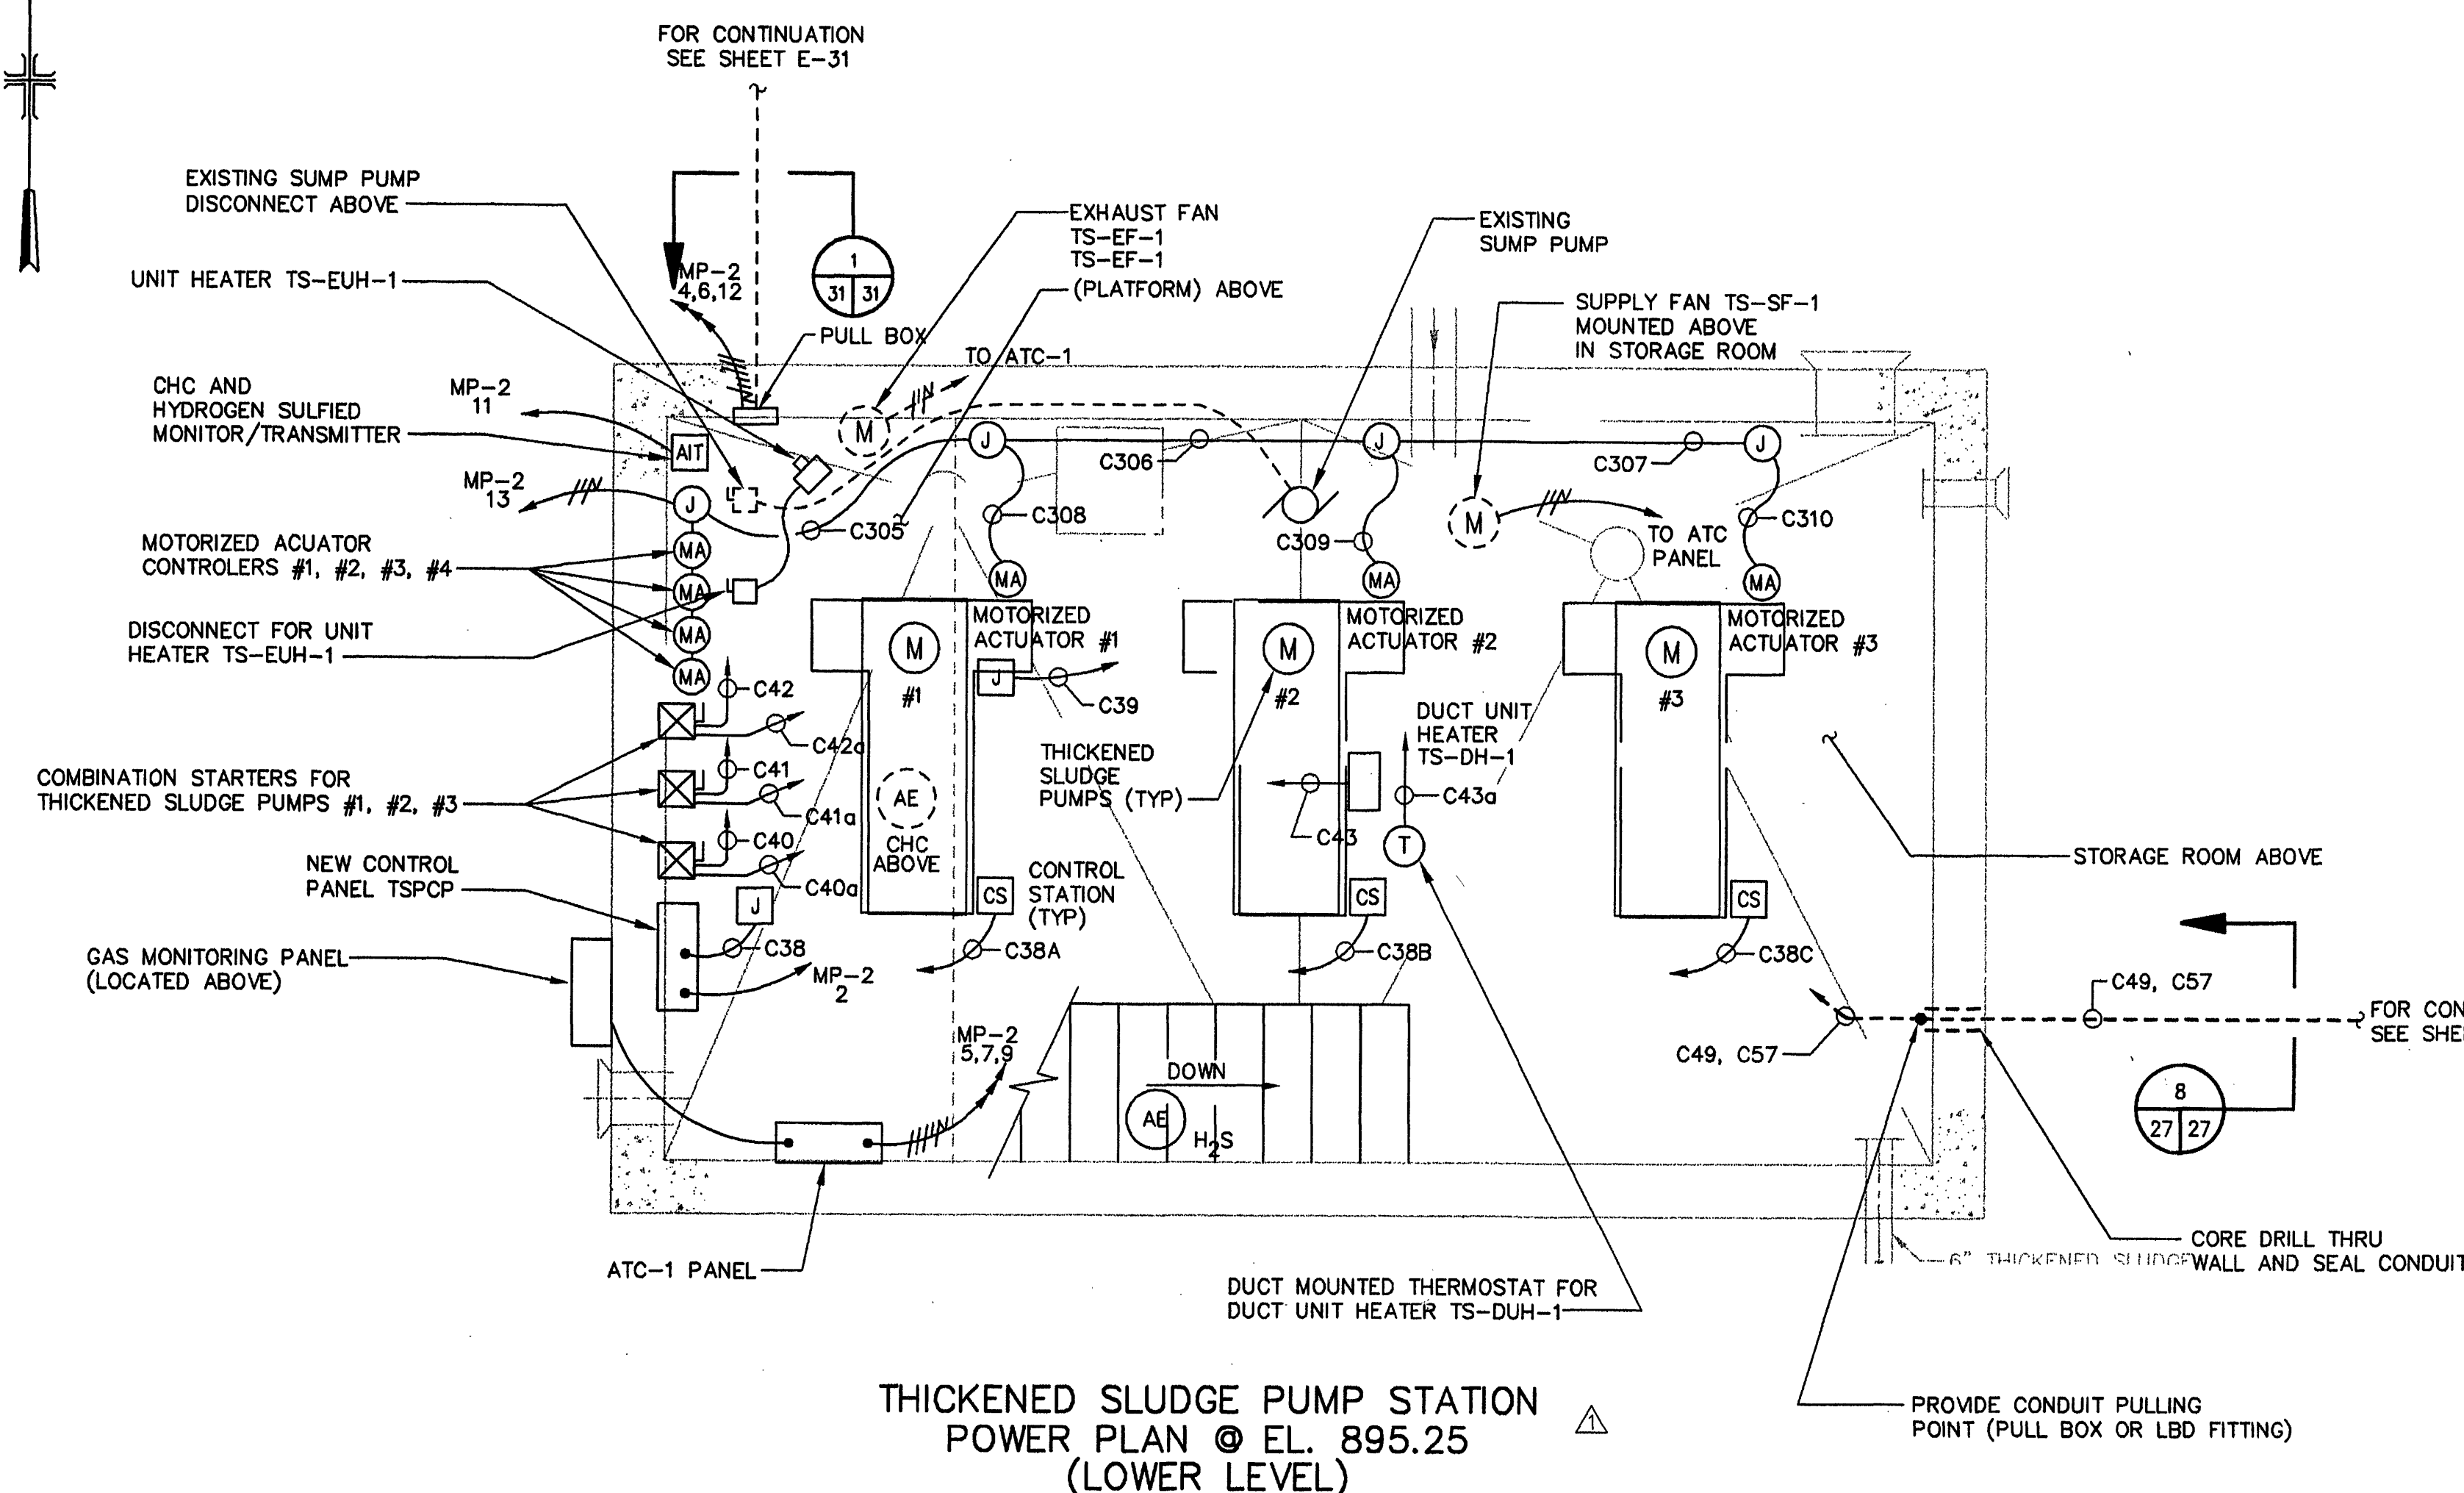

NOTES:

1. AREA CLASSIFICATION:
- a. THE THICKENED SLUDGE PUMP STATION IS CONSIDERED A WET LOCATION. ALL MATERIALS, EQUIPMENT AND INCIDENTALS SHALL MEET NEMA 4X REQUIREMENTS. ALL EXPOSED CONDUITS SHALL BE PVC COATED RIGID STEEL.

- ```

C300 - 2 #12, #12 GND 1°C
C301 - (3) SETS OF 7 #12 CU 1°C
C302 - (3) SETS OF 7 #12 CU 1°C
C303 - (2) SETS OF 7 #12 CU 1°C
C304 - (1) SET OF 7 #12 CU 1°C
C305 - (3) SETS OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C
C306 - (2) SETS OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C
C307 - (1) SET OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C
C308 - (1) SET OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C
C309 - (1) SET OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C
C310 - (1) SET OF 7 #12 CU, 2 #12 CU & 1 #12 CU GND POWER 1°C

```